

# UNISONIC TECHNOLOGIES CO., LTD

LR9153 **CMOS IC** 

# **LOW NOISE 500mA LDO** REGULATOR


#### DESCRIPTION

The UTC LR9153 is a typical LDO (linear regulator) with the features of high output voltage accuracy, low supply current, low ON-resistance, and high ripple rejection.

During operation of the UTC LR9153, the dropout voltage is very low and the response of line transient and load transient are very well.

Internally, there're many functions of UTC LR9153 which can be seen in the block figure. There are a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit in each UTC LR9153.

The UTC LR9153 can be used as an ideal of the power supply for hand-held communication equipment, such as: power source for portable communication equipment, power source for electrical appliances, for example, cameras, VCRs and camcorders and power source for battery-powered equipment.



#### **FEATURES**

\* Ultra Supply Current: 50µA (Typ.) \* Standby Mode: 0.1µA (Typ.)

\* Very Low Dropout Voltage: 0.30V (Typ.) @ IOUT =300mA, VOUT =2.85V

\* Well Line Regulation: 0.02%/ V (Typ.)

\*Output Voltage Accuracy: ±2.0%


\* Internal Fold Back Protection Circuit: 80mA (Typ.) (Current at short mode)

\*C<sub>IN</sub>=C<sub>OUT</sub>=1.0µF or more (Ceramic capacitors) are recommended to be used with this IC

# ORDERING INFORMATION

Ordering	Number	Dookogo	Packing	
Lead Free	Halogen Free	Package		
LR9153L-xx-AF5-R	LR9153G-xx-AF5-R	SOT-25	Tape Reel	
LR9153L-xx-K04-1010X2-R	LR9153G-xx-K04-1010X2-R	X2DFN1010-4	Tape Reel	
LR9153L-xx-K06-2020-R	LR9153G-xx-K06-2020-R	DFN2020-6	Tape Reel	
LR9153L-xx-K08-2020-R	LR9153G-xx-K08-2020-R	DFN2020-8	Tape Reel	

xx: Output Voltage. Note:

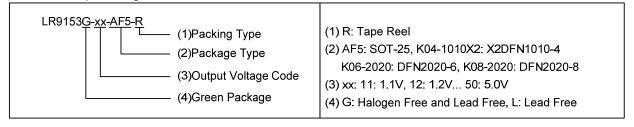


www.unisonic.com.tw 1 of 5 LR9153 cmos ic

#### **■ MARKING INFORMATION**

PACKAGE	VOLTAGE CODE	MARKING
SOT-25	11: 1.1V 12: 1.2V 15: 1.5V 18: 1.8V 20: 2.0V 25: 2.5V 28: 2.8V 30: 3.0V 33: 3.3V 36: 3.6V 50: 5.0V	The state of the s
X2DFN1010-4 DFN2020-6	A: 1.1V B: 1.2V C: 1.5V D: 1.8V E: 2.5V	VX ▶ Voltage Code
DFN2020-8	G: 2.8V J: 3.0V K: 3.3V F: 3.6V M: 5.0V	Voltage Code  → Date Code

# **■ PIN CONFIGURATION**

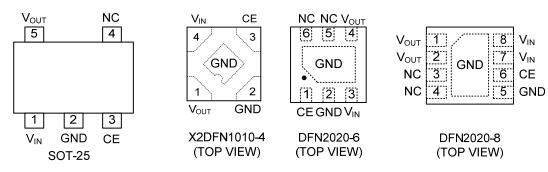


#### **■ PIN DESCRIPTION**

PIN NO.				DININIANAE	DESCRIPTION	
SOT-25	X2DFN1010-4	DFN2020-6	DFN2020-8	PIN NAME	DESCRIPTION	
1	4	3	7, 8	VIN	Input Pin	
2	2	2	5	GND	Ground Pin	
3	3	1	6	CE	Chip Enable Pin. Active when this Pin is high.	
4	-	5, 6	3, 4	NC	No Connection	
5	1	4	1, 2	Vout	Output Pin	
-	Exposed Pad	Exposed Pad	Exposed Pad	GND	Connect exposed pad to GND.	

LR9153 cmos ic

# **■ BLOCK DIAGRAM**

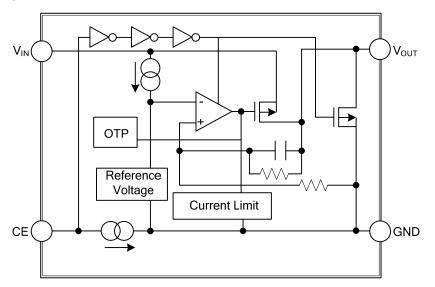

# ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		$V_{IN}$	6	V
Input Voltage (CE Pin)		$V_{\sf CE}$	6	V
Output Voltage		$V_{OUT}$	-0.3 ~ V <sub>IN</sub> +0.3	V
Output Current		l <sub>оит</sub>	500	mA
Power Dissipation	SOT-25	P <sub>D</sub>	360	mW
	X2DFN1010-4		550 (Note 2)	mW
	DFN2020-6		1000 (Note 2)	mW
	DFN2020-8		1100 (Note 2)	mW
Junction Temperature		TJ	+125	°C
Operating Temperature		$T_OPR$	-40 ~ +125	°C
Storage Temperature		T <sub>STG</sub>	-55 ~ +125	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Heat Sink Area of PCB Is recommended at least 10 mm x 10 mm.


#### **■ ELECTRICAL CHARACTERISTICS**

 $(T_A=25^{\circ}C, V_{IN}=Set V_{OUT}+1V, I_{OUT}=1mA, C_I=C_O=1.0\mu F, unless otherwise specified)$ 

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage		Vout	V <sub>IN</sub> =Set V <sub>OUT</sub> +1V		×0.98		×1.02	V
Input Voltage		V <sub>IN</sub>					6	V
Load Regulation		$\Delta V_{OUT}$	1mA≤I <sub>OUT</sub> ≤500mA			30	60	mV
Output Current		Іоит			500			mA
Supply Current		Iss	І оит=0А			50	80	μΑ
Supply Current (Standby	)	I <sub>ST-BY</sub>	V <sub>CE</sub> =0V			0.1	2	μΑ
Short Current Limit		ILIMIT	V <sub>OUT</sub> =0V			80		mA
CE Pull-down Current		I <sub>PD</sub>				0.3		μΑ
CE Input Voltage	High	Vceh			1.2			V
CE Input Voltage	Low	Vcel					0.3	V
Output Noise		eN	Bw=10Hz~100	kHz, I <sub>OUT</sub> =30mA		50		μVrms
			f=1kHz, Ripple 0.2V <sub>P-P</sub>					
Ripple Rejection		RR	V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, I <sub>OUT</sub> =30mA			65	dB	
			(In case that V				igsquare	
		Vo	I оит=300mA	1.1V≤V <sub>OUT</sub> <1.2V		0.87		V
				1.2V≤V <sub>OUT</sub> <1.5V		0.79		
				1.5V≤V <sub>OUT</sub> <1.7V		0.5		
Dropout Voltage				1.7V≤V <sub>0∪T</sub> <2.0V		0.44		
				2.0V≤V <sub>OUT</sub> <2.5V		0.37		
				2.5V≤V <sub>OUT</sub> <2.8V		0.32		
				2.8V≤V <sub>OUT</sub> ≤5.0V		0.30		
Line Demoleties			1.2V≤V <sub>OUT</sub> ≤4.0V,					
		$\Delta V_{OUT}$	JT V <sub>SET</sub> +0.5V≤V <sub>IN</sub> ≤5V			0.00	0.40	0/ /\ /
Line Regulation		$\Delta V_{IN}$	4.0V <v<sub>OUT≤5.0V,</v<sub>			0.02	0.10	%/V
			V <sub>SET</sub> +0.5V≤V <sub>IN</sub> ≤6V					
Low Output Nch Tr.		R <sub>LOW</sub>	V <sub>IN</sub> =4.0, V <sub>CE</sub> =0V			60		Ω
ON Resistance		. LOW	VIIV 1.5, VGE-0V					


LR9153 cmos ic

#### ■ TEST CIRCUIT

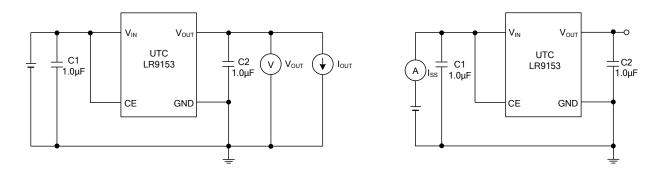

Basic Test Circuit


Test Circuit for Supply Current

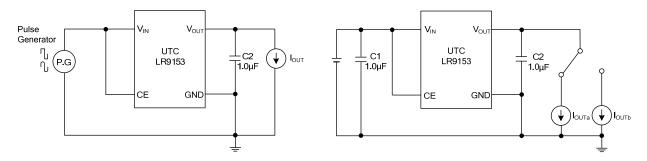

Test Circuit for Ripple Rejection

Test Circuit for Load Transient Response

# **■ TYPICAL APPLICATION CIRCUIT**

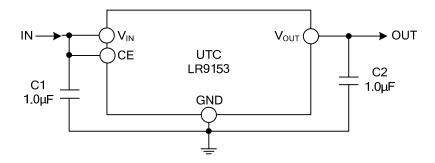

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.