



UTXS0108

CMOS IC

8-BIT BIDIRECTIONAL, LEVEL-SHIFTING, VOLTAGE TRANSLATOR FOR OPEN-DRAIN AND PUSH-PULL APPLICATION

DESCRIPTION

This 8-bit non-inverting translator is a bidirectional voltage-level translator and can be used to establish digital switching compatibility between mixed-voltage systems. It uses two separate configurable power-supply rails. The A port is designed to track V_{CCA} . V_{CCA} accepts any supply voltage from 1.4V to 3.6V. The B port is designed to track V_{CCB} . V_{CCA} must be less than or equal to V_{CCB} . V_{CCB} accepts any supply voltage from 1.65V to 5.5V. This allows for low voltage bidirectional translation between any of the 1.5V, 1.8V, 2.5V, 3.3V, and 5V voltage nodes.

When the output-enable(OE) input is low, all outputs are placed in the high-impedance state.


To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pull-down resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

FEATURES

- * 1.4V to 3.6V on A port and 1.65V to 5.5V on B Port ($V_{CCA} \leq V_{CCB}$)
- * No power-supply sequencing required – either V_{CCA} or V_{CCB} can be ramped first
- * No direction-control signal needed

APPLICATION

- * Handset
- * Smartphone
- * Tablet
- * Desktop PC

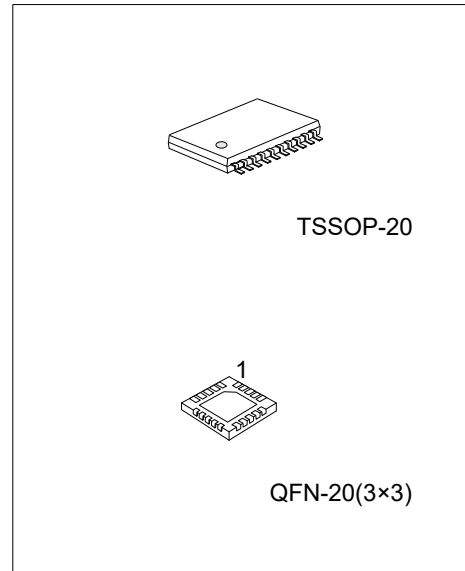

■ ORDERING INFORMATION



| Ordering Number | | Package | Packing |
|-----------------|-----------------|-------------|-----------|
| Lead Free | Halogen Free | | |
| UTXS0108L-P20-R | UTXS0108G-P20-R | TSSOP-20 | Tape Reel |
| UTXS0108L-QAM-R | UTXS0108G-QAM-R | QFN-20(3×3) | Tape Reel |

| | |
|---|---|
| <p>UTXS0108G-P20-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p> | <p>(1) R: Tape Reel (2) P20: TSSOP-20, QAM: QFN-20(3×3) (3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|---|---|

■ MARKING

| TSSOP-20 | QFN-20(3×3) |
|--|--|
| <p>14 13 12 11 10 9 8 → Date Code UTC □□□□ UTXS0108 □ L: Lead Free G: Halogen Free □□ → Lot Code 1 2 3 4 5 6 7</p> | <p>UTC □□□□ → Date Code UTXS0108 • □□ → Lot Code</p> |

PIN CONFIGURATION

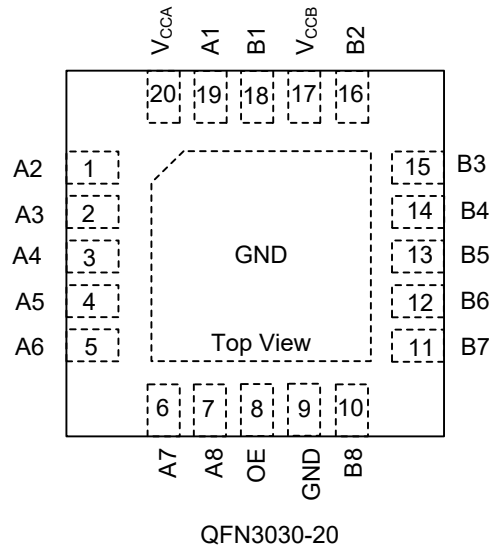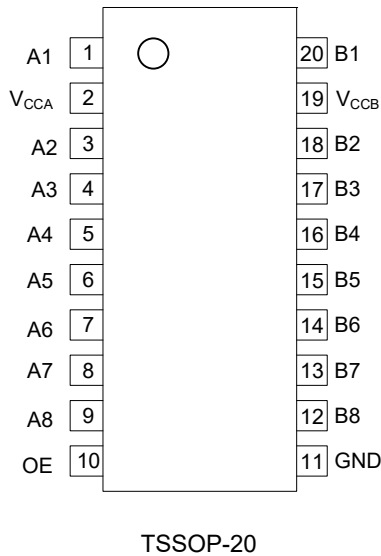

PIN DESCRIPTION

| PIN NO. | | PIN NAME | I/O | DESCRIPTION |
|----------|-------------|-----------|-----|--|
| TSSOP-20 | QFN-20(3x3) | | | |
| 1 | 19 | A1 | I/O | Input/output A1. Referenced to V_{CCA} |
| 2 | 20 | V_{CCA} | P | A-Port supply voltage. $1.4V \leq V_{CCA} \leq 3.6V$ and $V_{CCA} \leq V_{CCB}$ |
| 3 | 1 | A2 | I/O | Input/output A2. Referenced to V_{CCA} |
| 4 | 2 | A3 | I/O | Input/output A3. Referenced to V_{CCA} |
| 5 | 3 | A4 | I/O | Input/output A4. Referenced to V_{CCA} |
| 6 | 4 | A5 | I/O | Input/output A5. Referenced to V_{CCA} |
| 7 | 5 | A6 | I/O | Input/output A6. Referenced to V_{CCA} |
| 8 | 6 | A7 | I/O | Input/output A7. Referenced to V_{CCA} |
| 9 | 7 | A8 | I/O | Input/output A8. Referenced to V_{CCA} |
| 10 | 8 | OE | I | Output enable. Pull OE low to place all outputs in 3-state mode. Referenced to V_{CCA} . |
| 11 | 9 | GND | | Ground |
| 12 | 10 | B8 | I/O | Input/output B8. Referenced to V_{CCB} |
| 13 | 11 | B7 | I/O | Input/output B7. Referenced to V_{CCB} |
| 14 | 12 | B6 | I/O | Input/output B6. Referenced to V_{CCB} |
| 15 | 13 | B5 | I/O | Input/output B5. Referenced to V_{CCB} |
| 16 | 14 | B4 | I/O | Input/output B4. Referenced to V_{CCB} |
| 17 | 15 | B3 | I/O | Input/output B3. Referenced to V_{CCB} |
| 18 | 16 | B2 | I/O | Input/output B2. Referenced to V_{CCB} |
| 19 | 17 | V_{CCB} | P | B-Port supply voltage. $1.65V \leq V_{CCB} \leq 5.5V$ |
| 20 | 18 | B1 | I/O | Input/output B1. Referenced to V_{CCB} |


Note: I=Input, I/O=Input and Output, P=Power

FUNCTION TABLE

| SUPPLY VOLTAGE | | INPUTS | INPUTS/OUTPUT | |
|------------------|--------------|--------|-----------------|-----------------|
| V_{CCA} | V_{CCB} | OE | An | Bn |
| 1.4V ~ V_{CCB} | 1.65V ~ 5.5V | L | Z | Z |
| 1.4V ~ V_{CCB} | 1.65V ~ 5.5V | H | Input or Output | Output or Input |
| GND (Note 2) | GND (Note 2) | X | Z | Z |

Notes: 1. H = High voltage level ; L = Low voltage level ; Z : High impedance OFF-state ; X = Don't care.
 2. When either V_{CCA} or V_{CCB} is at GND level, the device goes into Power-down mode.

BLOCK DIAGRAM

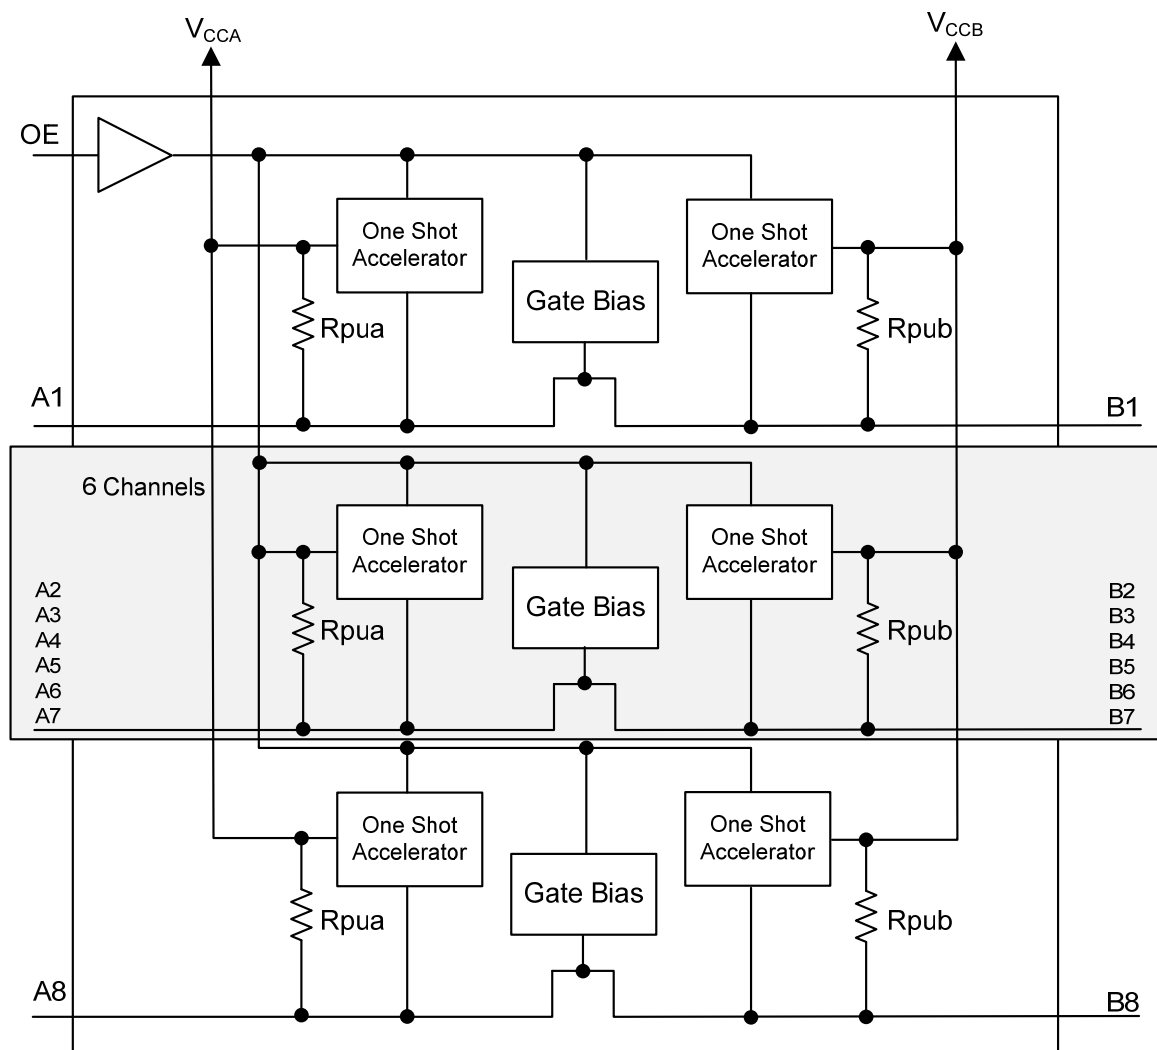

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|--|-----------|--------------------|----------------------|------|
| Supply voltage | | V_{CCA} | -0.5 ~ 4.6 | V |
| Supply voltage | | V_{CCB} | -0.5 ~ 6.5 | V |
| Input voltage | A Port | V_{IN} | -0.5 ~ 4.6 | V |
| | B Port | | -0.5 ~ 6.5 | V |
| Voltage range applied to any output in the high-impedance or power-off state | A Port | V_{OUT} | -0.5 ~ 4.6 | V |
| | B Port | | -0.5 ~ 6.5 | V |
| Voltage range applied to any output in the high or low state | A Port | V_{OUT} | -0.5 ~ $V_{CCA}+0.5$ | V |
| | B Port | | -0.5 ~ $V_{CCB}+0.5$ | V |
| Input clamp current | $V_I < 0$ | I_{IK} | -50 | mA |
| Output clamp current | $V_O < 0$ | I_{OK} | -50 | mA |
| Continuous output current | | I_O | ±50 | mA |
| Continuous current through V_{CCA} , V_{CCB} , or GND | | I_{CC} / I_{GND} | ±100 | mA |
| Storage Temperature | | T_{STG} | -65 ~ +150 | °C |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS (Unless otherwise specified)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------------------|-------------|---------------------|---|---|---------------|----------------------|-----------|
| Supply Voltage (Note 3) | | V_{CCA} | | 1.4 | | 3.6 | V |
| Supply Voltage (Note 3) | | V_{CCB} | | 1.65 | | 5.5 | V |
| Input Voltage | | V_{IN} | | 0 | | V_{CCI} | V |
| Output Voltage | A Port I/Os | V_{OUT} | $V_{CCA}=1.4V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | 0 | | 3.6 | V |
| | B Port I/Os | | | 0 | | 5.5 | V |
| High-Level Input Voltage | A Port I/Os | V_{IH} | $V_{CCA}=1.4V\sim 1.95V,$ $V_{CCB}=1.65V\sim 5.5V$ | $V_{CCI}-0.2$ | | V_{CCI} | V |
| | | | | $V_{CCA}=1.95V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | $V_{CCI}-0.4$ | | V_{CCI} |
| | B Port I/Os | | $V_{CCA}=1.4V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | $V_{CCI}-0.4$ | | V_{CCI} | V |
| | OE | | | $V_{CCA}\times 0.65$ | | 5.5 | V |
| Low-Level Input Voltage | A Port I/Os | V_{IL} | $V_{CCA}=1.4V\sim 1.95V,$ $V_{CCB}=1.65V\sim 5.5V$ | 0 | | 0.15 | V |
| | | | | $V_{CCA}=1.95V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | 0 | | 0.15 |
| | B Port I/Os | | $V_{CCA}=1.4V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | 0 | | 0.15 | V |
| | OE | | | 0 | | $V_{CCA}\times 0.35$ | V |
| Input Transition Rise or Fall Rate | A Port I/Os | $\Delta t/\Delta v$ | $V_{CCA}=1.4V\sim 3.6V,$ $V_{CCB}=1.65V\sim 5.5V$ | | | 10 | ns/V |
| | B Port I/Os | | | | | 10 | ns/V |
| | OE | | | | | 10 | ns/V |
| Operating Temperature | | T_A | | -40 | | +125 | °C |

Notes: 1. V_{CCI} is the supply voltage associated with the input port.
 2. V_{CCO} is the supply voltage associated with the output port.
 3. V_{CCA} must be less than or equal to V_{CCB} , and V_{CCA} must not exceed 3.6V.

■ ELECTRICAL CHARACTERISTICS (Unless otherwise specified)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|-------------------------------------|-------------|--------------------------|--|--|----------------------------|---------|---------|---------|
| Port A Output High Voltage | | V_{OHA} | $V_{CCA}=1.4V, V_{CCB}=1.65V\sim 5.5V$ $I_{OH}=-20\mu A, V_{IB}\geq V_{CCB}-0.4V$ | | V_{CCA} $\times 0.67$ | | V | |
| Port A Output Low Voltage | | V_{OLA} | $V_{CCA}=1.4V, V_{CCB}=1.65V\sim 5.5V,$ $I_{OL}=180\mu A, V_{IB}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=1.65V, V_{CCB}=1.65V\sim 5.5V,$ $I_{OL}=220\mu A, V_{IB}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=2.3V, V_{CCB}=1.65V\sim 5.5V,$ $I_{OL}=300\mu A, V_{IB}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=3.0V, V_{CCB}=1.65V\sim 5.5V,$ $I_{OL}=400\mu A, V_{IB}\leq 0.15V$ | | | 0.55 | V | |
| Port B Output High Voltage | | V_{OHB} | $V_{CCA}=1.4V, V_{CCB}=1.65V\sim 5.5V$ $I_{OH}=-20\mu A, V_{IA}\geq V_{CCA}-0.2V$ | | V_{CCA} $\times 0.67$ | | V | |
| Port B Output Low Voltage | | V_{OLB} | $V_{CCA}=1.4V\sim 3.6V, V_{CCB}=1.65V,$ $I_{OL}=220\mu A, V_{IA}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=1.4V\sim 3.6V, V_{CCB}=2.3V,$ $I_{OL}=300\mu A, V_{IA}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=1.4V\sim 3.6V, V_{CCB}=3.0V,$ $I_{OL}=400\mu A, V_{IA}\leq 0.15V$ | | | 0.4 | V | |
| | | | $V_{CCA}=1.4V\sim 3.6V, V_{CCB}=4.5V,$ $I_{OL}=620\mu A, V_{IA}\leq 0.15V$ | | | 0.55 | V | |
| Input Leakage Current | OE | $I_{I(LEAK)}$ | $V_{CCA}=1.4V, V_{CCB}=1.65V\sim 5.5V$ | -1 | | 1 | μA | |
| High-Impedance State Output Current | A or B Port | I_{OZ} | $V_{CCA}=1.4V, V_{CCB}=2.3V\sim 5.5V$ | -1 | | 1 | μA | |
| Quiescent Supply Current | | I_{CCA} | $V_{IN}=V_{OUT}=Open$ $I_O=0A$ | $V_{CCA}=1.4V,$ $V_{CCB}=1.65V\sim 5.5V$ | | 1.5 | μA | |
| | | | | $V_{CCA}=1.5V\sim 3.6V,$ $V_{CCB}=2.3V\sim 5.5V$ | | | 2 | μA |
| | | | | $V_{CCA}=3.6V, V_{CCB}=0V$ | | | 2 | μA |
| | | | | $V_{CCA}=0V, V_{CCB}=5.5V$ | | | -1 | μA |
| | | I_{CCB} | $V_{IN}=V_{OUT}=Open$ $I_O=0A$ | $V_{CCA}=1.4V,$ $V_{CCB}=1.65V\sim 5.5V$ | | 1.5 | μA | |
| | | | | $V_{CCA}=1.5V\sim 3.6V,$ $V_{CCB}=2.3V\sim 5.5V$ | | | 6 | μA |
| | | | | $V_{CCA}=3.6V, V_{CCB}=0V$ $V_{CCA}=0V, V_{CCB}=5.5V$ | | | -1 | μA |
| | | $I_{CCA}+I_{CCB}$ | $V_{IN}=V_{CCI} \text{ or } GND$ $I_O=0A$ | $V_{CCA}=1.4V,$ $V_{CCB}=2.3V\sim 5.5V$ | | | 3 | μA |
| | | | | $V_{CCA}=1.5V\sim 3.6V,$ $V_{CCB}=2.3V\sim 5.5V$ | | | 8 | μA |
| | | I_{CCZA} I_{CCZB} | $V_{IN}=V_{OUT}=Open$ $I_O=0A$ | $V_{CCA}=1.4V,$ $V_{CCB}=1.65V\sim 5.5V$ | | | 0.05 | μA |
| OE=GND | | | | | 4 | μA | | |
| Input Capacitance | OE | C_{IN} | $V_{CCA}=3.3V, V_{CCB}=3.3V$ | | | 4.5 | pF | |
| Output Capacitance | A Port | C_{IO} | $V_{CCA}=3.3V, V_{CCB}=3.3V$ | | | 6 | pF | |
| | B Port | | $V_{CCA}=3.3V, V_{CCB}=3.3V$ | | | 5.5 | pF | |

- Notes: 1. V_{CCI} is the supply voltage associated with the input port.
 2. V_{CCO} is the supply voltage associated with the output port.
 3. V_{CCA} must be less than or equal to V_{CCB} , and V_{CCA} must not exceed 3.6V.

■ SWITCHING CHARACTERISTICS (Unless otherwise specified)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | | |
|---|------------------------------|------------------|------------------------------|------------------------------|-----------------------------|------|------|-----|-----|----|
| Propagation Delay From Input (A) to Output (B) | Push-Pull Driving | t _{PHL} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | | | 11 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | | | 9.2 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | | | 8.6 | ns | | |
| | | | | V _{CCB} =5V±0.5V | | | 8.6 | ns | | |
| | V _{CCB} =1.8V±0.15V | | | 4 | | 14.4 | ns | | | |
| | V _{CCB} =2.5V±0.2V | | | 3.6 | | 12.8 | ns | | | |
| | V _{CCB} =3.3V±0.3V | | | 3.5 | | 12.2 | ns | | | |
| | V _{CCB} =5V±0.5V | | | 3.5 | | 12 | ns | | | |
| | Open-Drain Driving | | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | | | | 8.2 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | | | | 6.4 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 5.7 | ns | |
| | | | | V _{CCB} =5V±0.5V | | | | 5.6 | ns | |
| | V _{CCB} =1.8V±0.15V | | | 3.6 | | | 11.4 | ns | | |
| | V _{CCB} =2.5V±0.2V | | | 3.2 | | | 9.9 | ns | | |
| | V _{CCB} =3.3V±0.3V | | | 3.1 | | | 9.3 | ns | | |
| | V _{CCB} =5V±0.5V | | | 3.1 | | | 8.9 | ns | | |
| | Push-Pull Driving | | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | | | | 5.0 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 4.0 | ns | |
| | | | | V _{CCB} =5V±0.5V | | | | 3.7 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | 2.4 | | | 6.9 | ns | |
| | V _{CCB} =3.3V±0.3V | | | 2.3 | | | 6.3 | ns | | |
| | V _{CCB} =5V±0.5V | | | 2.2 | | | 5.8 | ns | | |
| | Open-Drain Driving | | | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | | | | 3.8 | ns |
| | | | | | V _{CCB} =5V±0.5V | | | | 3.1 | ns |
| V _{CCB} =3.3V±0.3V | 2.0 | | | | 5.3 | ns | | | | |
| V _{CCB} =5V±0.5V | 1.9 | | | | 4.8 | ns | | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|---|------------------------------|------------------|------------------------------|------------------------------|-----|------|------|-----|----|
| Propagation Delay From Input (B) to Output (A) | Push-Pull Driving | t _{PHL} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | | | 12.7 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | | | 11.1 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | | | 11 | ns | |
| | | | | V _{CCB} =5V±0.5V | | | 12 | ns | |
| | V _{CCB} =1.8V±0.15V | | | 3.4 | | 13.2 | ns | | |
| | V _{CCB} =2.5V±0.2V | | | 3.1 | | 9.6 | ns | | |
| | V _{CCB} =3.3V±0.3V | | | 2.8 | | 8.5 | ns | | |
| | V _{CCB} =5V±0.5V | | | 2.5 | | 7.5 | ns | | |
| | Open-Drain Driving | | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | | | | 9.8 | ns |
| | | | | V _{CCB} =2.5V±0.2V | | | | 8.0 | ns |
| | | | | V _{CCB} =3.3V±0.3V | | | | 7.4 | ns |
| | | | | V _{CCB} =5V±0.5V | | | | 7.0 | ns |
| | V _{CCB} =1.8V±0.15V | | | 3.4 | | 12.1 | ns | | |
| | V _{CCB} =2.5V±0.2V | | | 2.8 | | 8.5 | ns | | |
| | V _{CCB} =3.3V±0.3V | | | 2.5 | | 7.3 | ns | | |
| | V _{CCB} =5V±0.5V | | | 2.1 | | 6.2 | ns | | |
| | Push-Pull Driving | | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | | | | 5.4 | ns |
| | | | | V _{CCB} =3.3V±0.3V | | | | 4.7 | ns |
| | V _{CCB} =5V±0.5V | | | | | | 4.2 | ns | |
| | V _{CCB} =2.5V±0.2V | | | 2.5 | | 7.3 | ns | | |
| | V _{CCB} =3.3V±0.3V | | | 2.2 | | 6.0 | ns | | |
| | V _{CCB} =5V±0.5V | | | 1.8 | | 4.9 | ns | | |
| | Open-Drain Driving | | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | | | | 4.2 | ns |
| | | | | V _{CCB} =5V±0.5V | | | | 3.8 | ns |
| V _{CCB} =3.3V±0.3V | 2.1 | | | 5.5 | ns | | | | |
| V _{CCB} =5V±0.5V | 1.7 | | | 4.5 | ns | | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | | | |
|---|------------------------------|------------------|------------------------------|------------------------------|-----------------------------|-----------------------------|------|-----|----|-----|----|
| Propagation Delay From Input (A) to Output (B) | Push-Pull Driving | t _{PLH} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | | | 12 | ns | | | |
| | | | | V _{CCB} =2.5V±0.2V | | | 10 | ns | | | |
| | | | | V _{CCB} =3.3V±0.3V | | | 9.8 | ns | | | |
| | | | | V _{CCB} =5V±0.5V | | | 9.7 | ns | | | |
| | V _{CCB} =1.8V±0.15V | | | 182 | | 720 | ns | | | | |
| | V _{CCB} =2.5V±0.2V | | | 143 | | 554 | ns | | | | |
| | V _{CCB} =3.3V±0.3V | | | 114 | | 473 | ns | | | | |
| | V _{CCB} =5V±0.5V | | | 81 | | 384 | ns | | | | |
| | Open-Drain Driving | | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | | | | 9.0 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | | | | 2.1 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 6.5 | ns | | |
| | | | | V _{CCB} =5V±0.5V | | | | 6.3 | ns | | |
| | Push-Pull Driving | | | V _{CCB} =1.8V±0.15V | 194 | | | 729 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | 155 | | | 584 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | 126 | | | 466 | ns | | |
| | | | | V _{CCB} =5V±0.5V | 90 | | | 346 | ns | | |
| | Open-Drain Driving | | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | | | | 5.2 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 4.3 | ns | | |
| | | | | V _{CCB} =5V±0.5V | | | | 3.9 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | 149 | | | 592 | ns | | |
| | Push-Pull Driving | | | V _{CCB} =3.3V±0.3V | 125 | | | 488 | ns | | |
| | | | | V _{CCB} =5V±0.5V | 93 | | | 368 | ns | | |
| | | | | Open-Drain Driving | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | | | | 3.9 | ns |
| | | | | | | V _{CCB} =5V±0.5V | | | | 3.5 | ns |
| V _{CCB} =3.3V±0.3V | 111 | | | | | 439 | ns | | | | |
| V _{CCB} =5V±0.5V | 87 | | | | | 352 | ns | | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | | |
|---|------------------------------|------------------|------------------------------|------------------------------|-----------------------------|-----|------|------|-----|----|
| Propagation Delay From Input (B) to Output (A) | Push-Pull Driving | t _{PLH} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | | | 9.5 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | | | 6.2 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | | | 5.1 | ns | | |
| | | | | V _{CCB} =5V±0.5V | | | 1.6 | ns | | |
| | V _{CCB} =1.8V±0.15V | | | 186 | | 745 | ns | | | |
| | V _{CCB} =2.5V±0.2V | | | 147 | | 603 | ns | | | |
| | V _{CCB} =3.3V±0.3V | | | 118 | | 519 | ns | | | |
| | V _{CCB} =5V±0.5V | | | 84 | | 407 | ns | | | |
| | Open-Drain Driving | | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | | | | 10.2 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | | | | 7.0 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 5.8 | ns | |
| | | | | V _{CCB} =5V±0.5V | | | | 5.0 | ns | |
| | V _{CCB} =1.8V±0.15V | | | 197 | | 733 | ns | | | |
| | V _{CCB} =2.5V±0.2V | | | 159 | | 578 | ns | | | |
| | V _{CCB} =3.3V±0.3V | | | 129 | | 459 | ns | | | |
| | V _{CCB} =5V±0.5V | | | 93 | | 323 | ns | | | |
| | Push-Pull Driving | | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | | | | 5.9 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | | | | 4.4 | ns | |
| | | | | V _{CCB} =5V±0.5V | | | | 3.5 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | 150 | | 595 | ns | | |
| | V _{CCB} =3.3V±0.3V | | | 126 | | 481 | ns | | | |
| | V _{CCB} =5V±0.5V | | | 94 | | 345 | ns | | | |
| | Open-Drain Driving | | | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | | | | 3.8 | ns |
| | | | | | V _{CCB} =5V±0.5V | | | | 4.3 | ns |
| V _{CCB} =3.3V±0.3V | 112 | | 449 | | ns | | | | | |
| V _{CCB} =5V±0.5V | 86 | | 339 | | ns | | | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|---|--|------------------------|------------------------|------------------------|-----|------|------|----|
| Enable Time From Input (OE) to Output (A or B) | t_{en} | $V_{CCA}=1.5V\pm0.1V$ | $V_{CCB}=1.8V\pm0.15V$ | | | 200 | ns | |
| | | | $V_{CCB}=2.5V\pm0.2V$ | | | 200 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 200 | ns | |
| | | | $V_{CCB}=5V\pm0.5V$ | | | 200 | ns | |
| | | $V_{CCA}=1.8V\pm0.15V$ | $V_{CCB}=1.8V\pm0.15V$ | | | 200 | ns | |
| | | | $V_{CCB}=2.5V\pm0.2V$ | | | 200 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 200 | ns | |
| | | | $V_{CCB}=5V\pm0.5V$ | | | 200 | ns | |
| | | $V_{CCA}=2.5V\pm0.2V$ | $V_{CCB}=2.5V\pm0.2V$ | | | 200 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 200 | ns | |
| | | $V_{CCA}=3.3V\pm0.3V$ | $V_{CCB}=5V\pm0.5V$ | | | 200 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 200 | ns | |
| | Disable Time From Input (OE) to Output (A or B) | t_{dis} | $V_{CCA}=1.5V\pm0.1V$ | $V_{CCB}=1.8V\pm0.15V$ | | | 28.1 | ns |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | | | 22 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | | | 20.1 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | | | 19.6 | ns |
| $V_{CCA}=1.8V\pm0.15V$ | | | $V_{CCB}=1.8V\pm0.15V$ | | | 25.1 | ns | |
| | | | $V_{CCB}=2.5V\pm0.2V$ | | | 18.8 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 16.5 | ns | |
| | | | $V_{CCB}=5V\pm0.5V$ | | | 15.3 | ns | |
| $V_{CCA}=2.5V\pm0.2V$ | | | $V_{CCB}=2.5V\pm0.2V$ | | | 15.7 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 12.9 | ns | |
| $V_{CCA}=3.3V\pm0.3V$ | | | $V_{CCB}=5V\pm0.5V$ | | | 11.2 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | | 11.9 | ns | |
| | | | $V_{CCB}=5V\pm0.5V$ | | | 9.8 | ns | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|---------------------------------------|-----------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|-----|------|------|----|
| Input Rise Time (A Port Rise Time) | Push-Pull Driving | t _{rA} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | 3.5 | | 13.1 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | 3.0 | | 9.8 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | 3.1 | | 9.0 | ns | |
| | V _{CCB} =5V±0.5V | | | 3.2 | | 8.3 | ns | | |
| | Open-Drain Driving | | | V _{CCB} =1.8V±0.15V | 147 | | 982 | ns | |
| | | | | V _{CCB} =2.5V±0.2V | 115 | | 716 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | 92 | | 592 | ns | |
| | Push-Pull Driving | | | V _{CCA} =1.8V±0.15V | V _{CCB} =5V±0.5V | 66 | | 481 | ns |
| | | | | | V _{CCB} =1.8V±0.15V | 3.1 | | 11.9 | ns |
| | | | V _{CCB} =2.5V±0.2V | | 2.6 | | 8.6 | ns | |
| | V _{CCB} =3.3V±0.3V | | 2.7 | | | 7.8 | ns | | |
| | V _{CCB} =5V±0.5V | | 2.8 | | | 7.2 | ns | | |
| | Open-Drain Driving | | V _{CCB} =1.8V±0.15V | | 155 | | 996 | ns | |
| | | | V _{CCB} =2.5V±0.2V | | 124 | | 691 | ns | |
| | | | V _{CCB} =3.3V±0.3V | | 100 | | 508 | ns | |
| | Push-Pull Driving | | V _{CCA} =2.5V±0.2V | | V _{CCB} =5V±0.5V | 72 | | 350 | ns |
| | | | | V _{CCB} =2.5V±0.2V | 2.0 | | 7.3 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | 2.1 | | 6.4 | ns | |
| | V _{CCB} =5V±0.5V | | | 2.2 | | 5.8 | ns | | |
| | Open-Drain Driving | | | V _{CCB} =2.5V±0.2V | 110 | | 692 | ns | |
| | | | | V _{CCB} =3.3V±0.3V | 93 | | 529 | ns | |
| | | | | V _{CCB} =5V±0.5V | 68 | | 369 | ns | |
| | Push-Pull Driving | | | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | 1.8 | | 5.7 | ns |
| | | | | | V _{CCB} =5V±0.5V | 1.9 | | 5.0 | ns |
| Open-Drain Driving | | V _{CCB} =3.3V±0.3V | 75 | | | 446 | ns | | |
| | V _{CCB} =5V±0.5V | 57 | | | 337 | ns | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---------------------------------------|-----------------------|----------|------------------------|------------------------|-----|-----|------|----|
| Input Rise Time (B Port Rise Time) | Push-Pull Driving | t_{rB} | $V_{CCA}=1.5V\pm0.1V$ | $V_{CCB}=1.8V\pm0.15V$ | 2.9 | | 11.4 | ns |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 1.9 | | 7.4 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 0.9 | | 4.7 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | 0.7 | | 2.6 | ns |
| | Open-Drain Driving | | | $V_{CCB}=1.8V\pm0.15V$ | 135 | | 1020 | ns |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 91 | | 756 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 58 | | 653 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | 20 | | 370 | ns |
| | Push-Pull Driving | | $V_{CCA}=1.8V\pm0.15V$ | $V_{CCB}=1.8V\pm0.15V$ | 2.8 | | 10.5 | ns |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 1.8 | | 7.2 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.2 | | 5.2 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | 0.7 | | 2.7 | ns |
| | Open-Drain Driving | | | $V_{CCB}=1.8V\pm0.15V$ | 132 | | 1001 | ns |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 106 | | 677 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 73 | | 546 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | 32 | | 323 | ns |
| | Push-Pull Driving | | $V_{CCA}=2.5V\pm0.2V$ | $V_{CCB}=2.5V\pm0.2V$ | 1.8 | | 6.5 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.3 | | 5.1 | ns |
| | $V_{CCB}=5V\pm0.5V$ | | | 0.7 | | 3.4 | ns | |
| | Open-Drain Driving | | | $V_{CCB}=2.5V\pm0.2V$ | 107 | | 693 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 79 | | 483 | ns |
| | $V_{CCB}=5V\pm0.5V$ | | | 41 | | 304 | ns | |
| | Push-Pull Driving | | $V_{CCA}=3.3V\pm0.3V$ | $V_{CCB}=3.3V\pm0.3V$ | 1.5 | | 5.0 | ns |
| | | | | $V_{CCB}=5V\pm0.5V$ | 1.0 | | 3.6 | ns |
| Open-Drain Driving | $V_{CCB}=3.3V\pm0.3V$ | 72 | | | 427 | ns | | |
| | $V_{CCB}=5V\pm0.5V$ | 40 | | | 290 | ns | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|---------------------------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|-----|------|-----|----|
| Input Fall Time (A Port Fall Time) | Push-Pull Driving | t_{fA} | $V_{CCA}=1.5V\pm0.1V$ | $V_{CCB}=1.8V\pm0.15V$ | 2.3 | | 9.9 | ns | |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 1.7 | | 7.7 | ns | |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.6 | | 6.8 | ns | |
| | $V_{CCB}=5V\pm0.5V$ | | | 1.7 | | 6.0 | ns | | |
| | Open-Drain Driving | | | $V_{CCB}=1.8V\pm0.15V$ | 2.4 | | 10 | ns | |
| | | | | $V_{CCB}=2.5V\pm0.2V$ | 2.1 | | 7.9 | ns | |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.7 | | 7.0 | ns | |
| | $V_{CCB}=5V\pm0.5V$ | | | 1.5 | | 6.2 | ns | | |
| | Push-Pull Driving | | | $V_{CCA}=1.8V\pm0.15V$ | $V_{CCB}=1.8V\pm0.15V$ | 2.1 | | 8.8 | ns |
| | | | $V_{CCB}=2.5V\pm0.2V$ | | 1.6 | | 6.6 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | 1.4 | | 5.7 | ns | |
| | $V_{CCB}=5V\pm0.5V$ | | 1.4 | | | 4.9 | ns | | |
| | Open-Drain Driving | | $V_{CCB}=1.8V\pm0.15V$ | | 2.2 | | 9.0 | ns | |
| | | | $V_{CCB}=2.5V\pm0.2V$ | | 1.7 | | 6.7 | ns | |
| | | | $V_{CCB}=3.3V\pm0.3V$ | | 1.4 | | 5.8 | ns | |
| | $V_{CCB}=5V\pm0.5V$ | | 1.2 | | | 5.2 | ns | | |
| | Push-Pull Driving | | $V_{CCA}=2.5V\pm0.2V$ | | $V_{CCB}=2.5V\pm0.2V$ | 1.5 | | 5.7 | ns |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.2 | | 4.7 | ns | |
| | | | | $V_{CCB}=5V\pm0.5V$ | 1.3 | | 3.8 | ns | |
| | Open-Drain Driving | | | $V_{CCB}=2.5V\pm0.2V$ | 1.5 | | 5.6 | ns | |
| | | | | $V_{CCB}=3.3V\pm0.3V$ | 1.2 | | 4.7 | ns | |
| | | | | $V_{CCB}=5V\pm0.5V$ | 1.1 | | 4.0 | ns | |
| | Push-Pull Driving | | | $V_{CCA}=3.3V\pm0.3V$ | $V_{CCB}=3.3V\pm0.3V$ | 1.2 | | 4.5 | ns |
| | | | | | $V_{CCB}=5V\pm0.5V$ | 1.1 | | 3.5 | ns |
| Open-Drain Driving | | $V_{CCB}=3.3V\pm0.3V$ | | | 1.1 | | 4.4 | ns | |
| | $V_{CCB}=5V\pm0.5V$ | 1.0 | | | 3.7 | ns | | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | | |
|---------------------------------------|--------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------|------|------|------|
| Input Fall Time (B Port Fall Time) | Push-Pull Driving | t _{FB} | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | 2.0 | | 8.7 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | 1.3 | | 5.5 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | 0.9 | | 3.8 | ns | | |
| | | | | V _{CCB} =5V±0.5V | 0.8 | | 3.1 | ns | | |
| | Open-Drain Driving | | | V _{CCB} =1.8V±0.15V | 1.2 | | 11.5 | ns | | |
| | | | | V _{CCB} =2.5V±0.2V | 1.3 | | 8.6 | ns | | |
| | | | | V _{CCB} =3.3V±0.3V | 1.0 | | 9.6 | ns | | |
| | | | | V _{CCB} =5V±0.5V | 0.5 | | 7.7 | ns | | |
| | Push-Pull Driving | | | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | 2.0 | | 8.3 | ns | |
| | | | | | V _{CCB} =2.5V±0.2V | 1.3 | | 5.4 | ns | |
| | | | | | V _{CCB} =3.3V±0.3V | 0.9 | | 3.9 | ns | |
| | | | | | V _{CCB} =5V±0.5V | 0.7 | | 3.0 | ns | |
| | Open-Drain Driving | | V _{CCB} =1.8V±0.15V | | 0.8 | | 10.5 | ns | | |
| | | | V _{CCB} =2.5V±0.2V | | 0.7 | | 10.7 | ns | | |
| | | | V _{CCB} =3.3V±0.3V | | 1.0 | | 9.6 | ns | | |
| | | | V _{CCB} =5V±0.5V | | 0.6 | | 7.8 | ns | | |
| | Push-Pull Driving | | V _{CCA} =2.5V±0.2V | | V _{CCB} =2.5V±0.2V | 1.4 | | 5.4 | ns | |
| | | | | | V _{CCB} =3.3V±0.3V | 0.9 | | 4.1 | ns | |
| | | | | | V _{CCB} =5V±0.5V | 0.7 | | 3.0 | ns | |
| | | | | | V _{CCB} =2.5V±0.2V | 0.4 | | 14.2 | ns | |
| | Open-Drain Driving | | | V _{CCB} =3.3V±0.3V | 0.5 | | 19.4 | ns | | |
| | | | | V _{CCB} =5V±0.5V | 0.4 | | 3.0 | ns | | |
| | | | | Push-Pull Driving | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | 1.1 | | 4.2 | ns |
| | | | | | | V _{CCB} =5V±0.5V | 0.8 | | 3.1 | ns |
| V _{CCB} =3.3V±0.3V | 1.0 | | | | | 4.2 | ns | | | |
| V _{CCB} =5V±0.5V | 0.8 | | | | | 3.1 | ns | | | |
| Data Rate | Push-Pull Driving | f _{data} | | V _{CCA} =1.5V±0.1V | | V _{CCB} =1.8V±0.15V | | | 40 | Mbps |
| | | | | | | V _{CCB} =2.5V±0.2V | | | 60 | Mbps |
| | | | V _{CCB} =3.3V±0.3V | | | | | 60 | Mbps | |
| | | | V _{CCB} =5V±0.5V | | | | | 50 | Mbps | |
| | Open-drain Driving | | V _{CCB} =1.8V±0.15V | | | | | 2 | Mbps | |
| | | | V _{CCB} =2.5V±0.2V | | | | | 2 | Mbps | |
| | | | V _{CCB} =3.3V±0.3V | | | | | 2 | Mbps | |
| | | | V _{CCB} =5V±0.5V | | | | | 2 | Mbps | |
| Pulse Duration | Push-Pull Driving | | t _w | | V _{CCA} =1.5V±0.1V | V _{CCB} =1.8V±0.15V | 25 | | | ns |
| | | | | | | V _{CCB} =2.5V±0.2V | 16.7 | | | ns |
| | | | | | | V _{CCB} =3.3V±0.3V | 16.7 | | | ns |
| | | | | | | V _{CCB} =5V±0.5V | 20 | | | ns |
| | Open-drain Driving | V _{CCB} =1.8V±0.15V | | 500 | | | | | ns | |
| | | V _{CCB} =2.5V±0.2V | | 500 | | | | | ns | |
| | | V _{CCB} =3.3V±0.3V | | 500 | | | | | ns | |
| | | V _{CCB} =5V±0.5V | | 500 | | | | | ns | |
| Data Rate | Push-Pull Driving | f _{data} | | V _{CCA} =1.8V±0.15V | | V _{CCB} =1.8V±0.15V | | | 40 | Mbps |
| | | | | | | V _{CCB} =2.5V±0.2V | | | 60 | Mbps |
| | | | | | | V _{CCB} =3.3V±0.3V | | | 60 | Mbps |
| | | | | | | V _{CCB} =5V±0.5V | | | 60 | Mbps |
| | Open-drain Driving | | V _{CCB} =1.8V±0.15V | | | | 2 | Mbps | | |
| | | | V _{CCB} =2.5V±0.2V | | | | 2 | Mbps | | |
| | | | V _{CCB} =3.3V±0.3V | | | | 2 | Mbps | | |
| | | | V _{CCB} =5V±0.5V | | | | 2 | Mbps | | |

■ SWITCHING CHARACTERISTICS (Cont.)

| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------|--------------------|-------------------|------------------------------|------------------------------|------|-----|------|
| Pulse Duration | Push-Pull Driving | t _w | V _{CCA} =1.8V±0.15V | V _{CCB} =1.8V±0.15V | 25 | | ns |
| | | | | V _{CCB} =2.5V±0.2V | 16.7 | | ns |
| | | | | V _{CCB} =3.3V±0.3V | 16.7 | | ns |
| | | | | V _{CCB} =5V±0.5V | 16.7 | | ns |
| | Open-drain Driving | | | V _{CCB} =1.8V±0.15V | 500 | | ns |
| | | | | V _{CCB} =2.5V±0.2V | 500 | | ns |
| | | | | V _{CCB} =3.3V±0.3V | 500 | | ns |
| Data Rate | Push-Pull Driving | f _{data} | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | | 60 | Mbps |
| | | | | V _{CCB} =3.3V±0.3V | | 60 | Mbps |
| | | | | V _{CCB} =5V±0.5V | | 60 | Mbps |
| | Open-drain Driving | | | V _{CCB} =2.5V±0.2V | | 2 | Mbps |
| | | | | V _{CCB} =3.3V±0.3V | | 2 | Mbps |
| | | | | V _{CCB} =5V±0.5V | | 2 | Mbps |
| Pulse Duration | Push-Pull Driving | t _w | V _{CCA} =2.5V±0.2V | V _{CCB} =2.5V±0.2V | 16.7 | | ns |
| | | | | V _{CCB} =3.3V±0.3V | 16.7 | | ns |
| | | | | V _{CCB} =5V±0.5V | 16.7 | | ns |
| | Open-drain Driving | | | V _{CCB} =2.5V±0.2V | 500 | | ns |
| | | | | V _{CCB} =3.3V±0.3V | 500 | | ns |
| Data Rate | Push-Pull Driving | f _{data} | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | | 60 | Mbps |
| | | | | V _{CCB} =5V±0.5V | | 60 | Mbps |
| | Open-drain Driving | | | V _{CCB} =3.3V±0.3V | | 2 | Mbps |
| | | | | V _{CCB} =5V±0.5V | | 2 | Mbps |
| Pulse Duration | Push-Pull Driving | t _w | V _{CCA} =3.3V±0.3V | V _{CCB} =3.3V±0.3V | 16.7 | | ns |
| | | | | V _{CCB} =5V±0.5V | 16.7 | | ns |
| | Open-drain Driving | | | V _{CCB} =3.3V±0.3V | 500 | | ns |
| | | | | V _{CCB} =5V±0.5V | 500 | | ns |

■ OPERATING CHARACTERISTICS (Unless otherwise specified)


| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|-------------------------------|--|--|--|--|--|------|------|----|----|
| Power Dissipation Capacitance | A Port Input B Port Output | CPDA | $C_L=0, f=10\text{MHz}$ $t_r=t_f=1\text{nS}$ OE= V_{CCA} (Output Enabled) | $V_{CCA}=1.5\text{V}$ $V_{CCB}=1.5\text{V}$ | | 5.9 | | pF | |
| | | | | $V_{CCA}=1.8\text{V}$ $V_{CCB}=1.8\text{V}$ | | 5.9 | | pF | |
| | | | | $V_{CCA}=2.5\text{V}$ $V_{CCB}=2.5\text{V}$ | | 6.7 | | pF | |
| | | | | $V_{CCA}=3.3\text{V}$ $V_{CCB}=3.3\text{V}$ | | 8.0 | | pF | |
| | $V_{CCA}=1.5\text{V}$ $V_{CCB}=1.5\text{V}$ | | | | 9.9 | | pF | | |
| | $V_{CCA}=1.8\text{V}$ $V_{CCB}=1.8\text{V}$ | | | | 9.7 | | pF | | |
| | $V_{CCA}=2.5\text{V}$ $V_{CCB}=2.5\text{V}$ | | | | 9.4 | | pF | | |
| | $V_{CCA}=3.3\text{V}$ $V_{CCB}=3.3\text{V}$ | | | | 9.8 | | pF | | |
| | B Port Input A Port Output | | $C_L=0, f=10\text{MHz}$ $t_r=t_f=1\text{nS}$ OE=GND (Output Disabled) | $V_{CCA}=1.5\text{V}$ $V_{CCB}=1.5\text{V}$ | | 0.01 | | pF | |
| | | | | $V_{CCA}=1.8\text{V}$ $V_{CCB}=1.8\text{V}$ | | 0.01 | | pF | |
| | | | | $V_{CCA}=2.5\text{V}$ $V_{CCB}=2.5\text{V}$ | | 0.01 | | pF | |
| | | | | $V_{CCA}=3.3\text{V}$ $V_{CCB}=3.3\text{V}$ | | 0.01 | | pF | |
| | A Port Input B Port Output | | | $C_L=0, f=10\text{MHz}$ $t_r=t_f=1\text{nS}$ OE=GND (Output Disabled) | $V_{CCA}=1.5\text{V}$ $V_{CCB}=1.5\text{V}$ | | 0.01 | | pF |
| | | | | | $V_{CCA}=1.8\text{V}$ $V_{CCB}=1.8\text{V}$ | | 0.01 | | pF |
| | | | | | $V_{CCA}=2.5\text{V}$ $V_{CCB}=2.5\text{V}$ | | 0.01 | | pF |
| | | | | | $V_{CCA}=3.3\text{V}$ $V_{CCB}=3.3\text{V}$ | | 0.01 | | pF |
| B Port Input A Port Output | $C_L=0, f=10\text{MHz}$ $t_r=t_f=1\text{nS}$ OE=GND (Output Disabled) | $V_{CCA}=1.5\text{V}$ $V_{CCB}=1.5\text{V}$ | | | 0.01 | | pF | | |
| | | $V_{CCA}=1.8\text{V}$ $V_{CCB}=1.8\text{V}$ | | | 0.01 | | pF | | |
| | | $V_{CCA}=2.5\text{V}$ $V_{CCB}=2.5\text{V}$ | | | 0.01 | | pF | | |
| | | $V_{CCA}=3.3\text{V}$ $V_{CCB}=3.3\text{V}$ | | | 0.01 | | pF | | |

■ OPERATING CHARACTERISTICS (Cont.)


| PARAMETER | | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|-------------------------------|-------------------------------|------------------|--|--|-----|------|------|----|
| Power Dissipation Capacitance | A Port Input B Port Output | C _{PDB} | C _L =0, f=10MHz t _r =t _f =1nS OE=V _{CCA} (Output Enabled) | V _{CCA} =1.5V V _{CCB} =1.5V | | 21.5 | | pF |
| | | | | V _{CCA} =1.8V V _{CCB} =1.8V | | 20.8 | | pF |
| | | | | V _{CCA} =2.5V V _{CCB} =2.5V | | 21 | | pF |
| | | | | V _{CCA} =3.3V V _{CCB} =3.3V | | 23 | | pF |
| | B Port Input A Port Output | | | V _{CCA} =1.5V V _{CCB} =1.5V | | 16.7 | | pF |
| | | | | V _{CCA} =1.8V V _{CCB} =1.8V | | 16.8 | | pF |
| | | | | V _{CCA} =2.5V V _{CCB} =2.5V | | 17.8 | | pF |
| | | | | V _{CCA} =3.3V V _{CCB} =3.3V | | 20.9 | | pF |
| | A Port Input B Port Output | | C _L =0, f=10MHz t _r =t _f =1nS OE=GND (Output Disabled) | V _{CCA} =1.5V V _{CCB} =1.5V | | 0.01 | | pF |
| | | | | V _{CCA} =1.8V V _{CCB} =1.8V | | 0.01 | | pF |
| | | | | V _{CCA} =2.5V V _{CCB} =2.5V | | 0.01 | | pF |
| | | | | V _{CCA} =3.3V V _{CCB} =3.3V | | 0.02 | | pF |
| | B Port Input A Port Output | | | V _{CCA} =1.5V V _{CCB} =1.5V | | 0.01 | | pF |
| | | | | V _{CCA} =1.8V V _{CCB} =1.8V | | 0.01 | | pF |
| | | | | V _{CCA} =2.5V V _{CCB} =2.5V | | 0.01 | | pF |
| | | | | V _{CCA} =3.3V V _{CCB} =3.3V | | 0.02 | | pF |

TEST CIRCUIT AND WAVEFORMS


Load Circuits

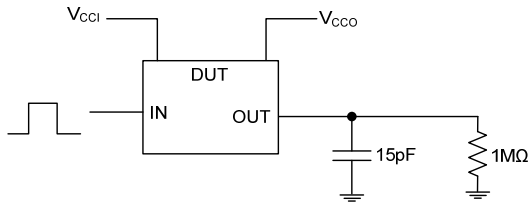

Data Rate, Pulse Duration, Propagation Delay, Output Rise-Time and Fall-Time Measurement Using a Push-Pull Driver



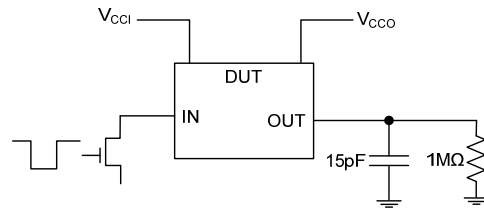


Data Rate, Pulse Duration, Propagation Delay, Output Rise-Time and Fall-Time Measurement Using an Open-Drain Driver

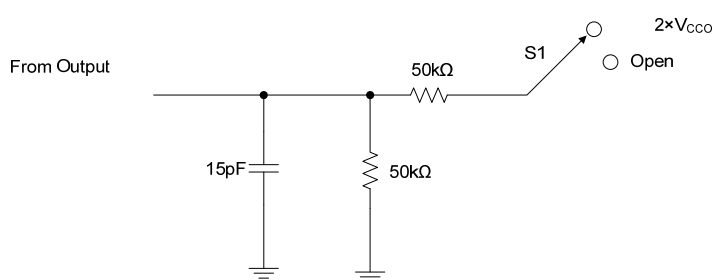

| TEST | S1 |
|-------------------|--------------------|
| t_{PZL}/t_{PLZ} | $2 \times V_{CCO}$ |
| t_{PHZ}/t_{PHZ} | Open |

- Notes: 1. V_{CCI} is the supply voltage associated with the input.
 2. V_{CCO} is the supply voltage associated with the input.
 3. t_{en} is the same as t_{PZL} and t_{PHZ} .
 t_{dis} is the same as t_{PLZ} and t_{PHZ} .

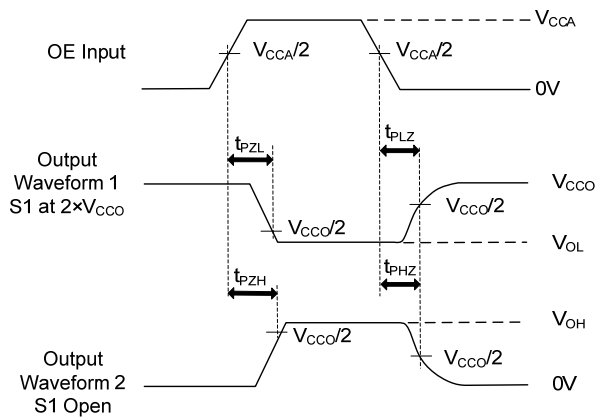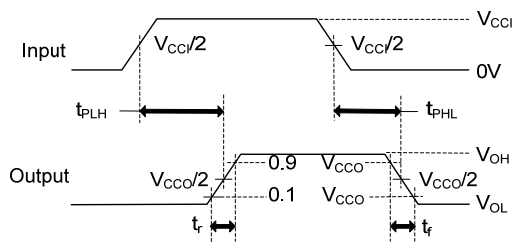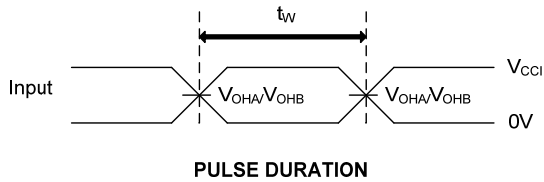

DETAILED DESCRIPTION

Overview

The **UTXS0108** can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The **UTXS0108** is ideal for use in applications where an open-drain driver is connected to the data I/Os. The **UTXS0108** can also be used in applications where a push-pull driver is connected to the data I/Os, but the **UTXB0104** might be a better option for such push-pull applications. The **UTXS0108** device is a semi-buffered auto-direction-sensing voltage translator design is optimized for translation applications (e.g. MMC Card Interfaces) that require the system to start out in a low-speed open-drain mode and then switch to a higher speed push-pull mode.

Architecture

To address these application requirements, a semi-buffered architecture design is used and is illustrated below (see Figure 1). Edge-rate accelerator circuitry (for both the high-to-low and low-to-high edges), a High-Ron n-channel pass-gate transistor (on the order of 300Ω to 500Ω) and pull-up resistors (to provide DC-bias and drive capabilities) are included to realize this solution. A direction-control signal (to control the direction of data flow from A to B or from B to A) is not needed. The resulting implementation supports both low-speed open-drain operation as well as high-speed push-pull operation.

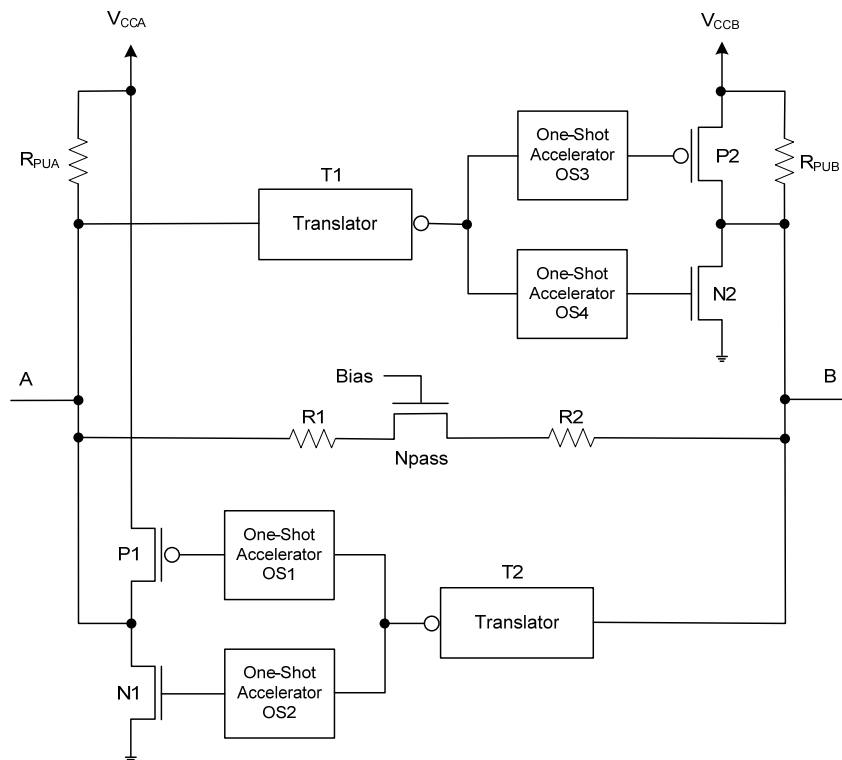


Figure 1. Architecture of UTXS0108 I/O Cell

When transmitting data from A to B ports, during a rising edge the One-Shot (OS3) turns on the PMOS transistor (P2) for a short-duration and this speeds up the low-to-high transition. Similarly, during a falling edge, when transmitting data from A to B, the One-Shot (OS4) turns on NMOS transistor (N2) for a short-duration and this speeds up the high-to-low transition. The B port edge-rate accelerator consists of one-shots OS3 and OS4, Transistors P2 and N2 and serves to rapidly force the B port high or low when a corresponding transition is detected on the A port.

When transmitting data from B to A ports, during a rising edge the One-Shot (OS1) turns on the PMOS transistor (P1) for a short-duration and this speeds up the low-to-high transition. Similarly, during a falling edge, when transmitting data from B to A, the One-Shot (OS2) turns on NMOS transistor (N1) for a short-duration and this speeds up the high-to-low transition. The A port edge-rate accelerator consists of one-shots OS1 and OS2, Transistors P1 and N1 components and form the edge-rate accelerator and serves to rapidly force the A port high or low when a corresponding transition is detected on the B port.

■ DETAILED DESCRIPTION (Cont.)**Power-Up**

During operation, ensure that $V_{CCA} \leq V_{CCB}$ at all times. During power-up sequencing, $V_{CCA} \geq V_{CCB}$ does not damage the device, so any power supply can be ramped up first.


Enable and Disable

The **UTXS0108** has an OE input that is used to disable the device by setting OE low, which places all I/Os in the Hi-Z state. The disable time (t_{dis}) indicates the delay between the time when OE goes low and when the outputs actually get disabled (Hi-Z). The enable time (t_{en}) indicates the amount of time the user must allow for the one-shot circuitry to become operational after OE is taken high.

Pull-up or Pull-down Resistors on I/O Lines

Each A port I/O has a pull-up resistor (R_{pua}) to V_{CCA} and each B port I/O has a pull-up resistor (R_{pub}) to V_{CCB} . R_{pua} and R_{pub} have a value of 40k Ω when the output is driving low. R_{pua} and R_{pub} have a value of 4k Ω when the output is driving high. R_{pua} and R_{pub} are disabled when OE = Low.

■ TYPICAL APPLICATION CIRCUIT

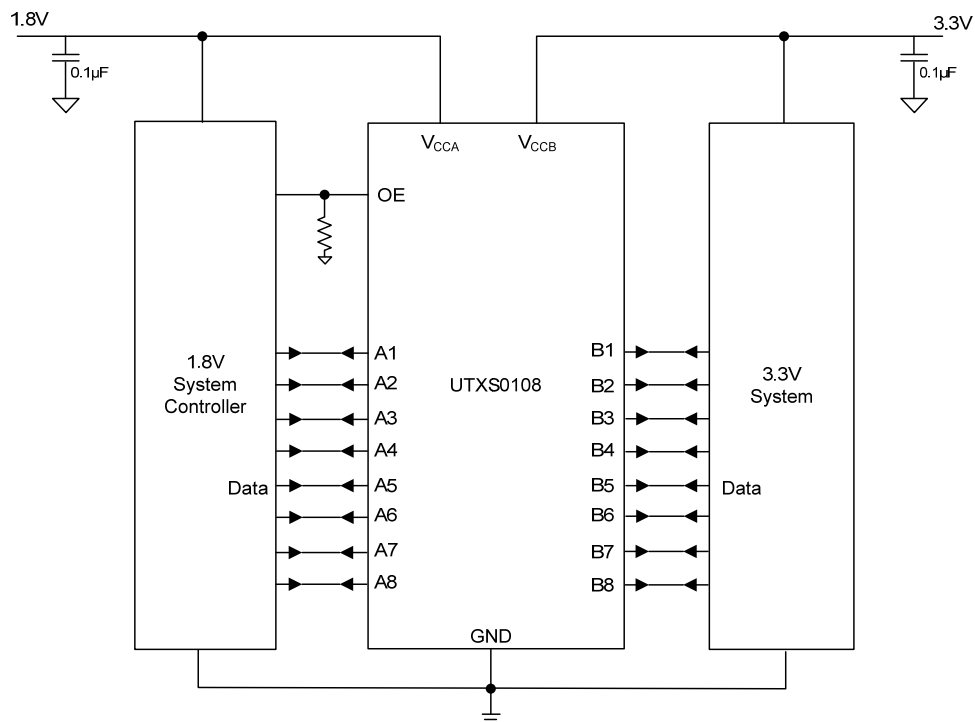

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.