



16W LED Driver Using L3010

Subject

L3010 16W / 0.7A DC/DC LED Driver Demo Board Manual

Key features:

- DC Input Full Range 4.5Vdc~40Vdc
 - DC-DC buck converter
 - Efficiency 96.04%(maximum)
 - Short Circuit Protection and Open Loop Protection.
-

Revision History

Revise Date	Version	Reason/Issue
2014/9/4	A	First Issue



16W LED Driver Using L3010

Contents Index		Page
1	LED Demo Board Specification	3
1.1.	Input Characteristics	3
1.2.	Output Characteristics	3
1.3.	Performance Specifications	3
1.4.	Protection Function	3
1.5.	Environment	3
2	LED Demo Board Information	4
2.1.	Schematic	4
2.2.	BOM	4
3	Performance Evaluation	5
3.1.	Input Characteristics	6
3.1.1	Efficiency vs. Input Voltage	6
3.2.	Output Characteristics	6
3.2.1.	Output Current vs. Input Voltage	6
3.3.	Protection	7
3.3.1.	Open Loop Protection	7
3.3.2.	Short Circuit Protection	7



16W LED Driver Using L3010

1. LED Driver Demo Board Specification

1.1. Input Characteristics

- DC input voltage rating 6Vdc ~ 36Vdc
- DC input voltage range 4.5Vdc ~ 40Vdc

1.2. Output Characteristics

- Output voltage 3V~24V
- Typical output current 0.7A

1.3. Performance Specifications

- Maximum output power 16W
- Efficiency(maximum) 96.04%
- Current load regulation < $\pm 5\%$
- Current line regulation < $\pm 5\%$

1.4. Protection Function

- Short circuit protection Auto Recovery
- Open loop protection Auto Recovery

1.5. Environment


- Operation Temperature 0°C to 40 °C
- Operation Humidity 20% to 90% R.H
- Storage Temperature -40°C to 60 °C
- Storage Humidity 0% to 90% R.H



16W LED Driver Using L3010

2. LED Demo Board Information

2.1. Schematic

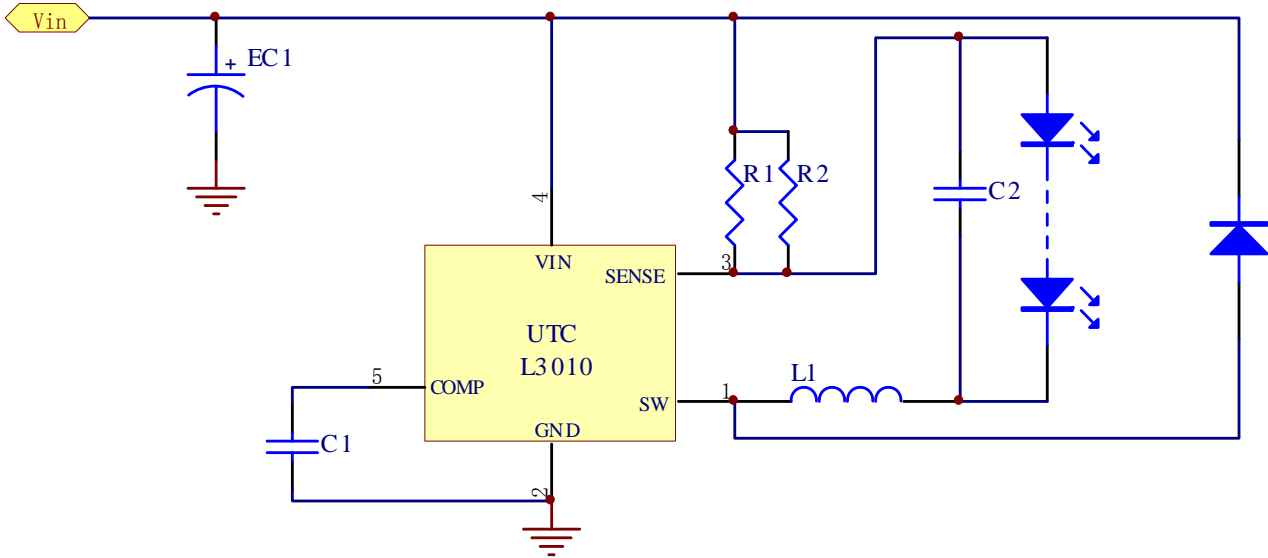

2.2. BOM

No.	Position	Description	Quantity
1	R1	0.24R, 1206, 1%	1
2	R2	0.27R, 1206, 1%	1
3	C1	2.2uF, 50V, 20%, 1206, X7R	1
4	C2	0.1uF, 50V, 20%, 0805, X7R	1
5	D1	UTC SK34 (3A, 40V), SMC	1
6	IC1	UTC L3010, SOP8	1
7	L1	47uH, 9*10*4mm	1
8	EC1	10uF, 50V, 5*11	1

16W LED Driver Using L3010

3. Performance Evaluation

This document presented here is to describe the power module performance.
The measuring data are tested at the board end, unless otherwise specified.

The Summarized Result :

Item	Test result
1. Input Characteristics	
Efficiency (maximum)	96.04%
2. Output characteristics	
Maximum Output Power	16W
Output Typical Voltage	3V~24V
Output Typical Current	0.7A
Load Regulation	<± 5%
Current Line Regulation	<± 5%
3. Protection	
Short Circuit Protection	Auto Recovery
Open Loop Protection	Auto Recovery

Test Equipment:

Item	Vendor	Model No:
1.DC Source	MATRIX	MPS-3003L-3
2.Multimeter	KEITHLEY	2000
3.Electronic load	PRODIGIT	3310



16W LED Driver Using L3010

3.1. Input Characteristics

3.1.1. Efficiency vs. Supply Voltage

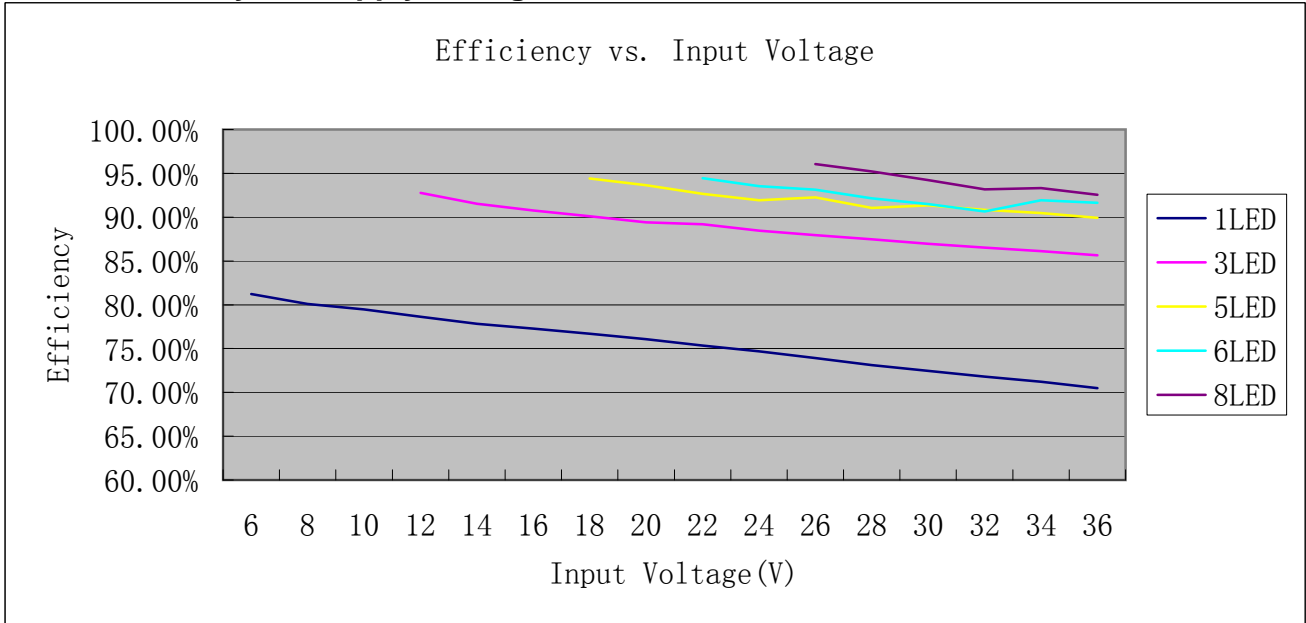


Fig.1 Efficiency V.S. Input Voltage

3.2. Output Characteristics

3.2.1. Output Current vs. Input Voltage

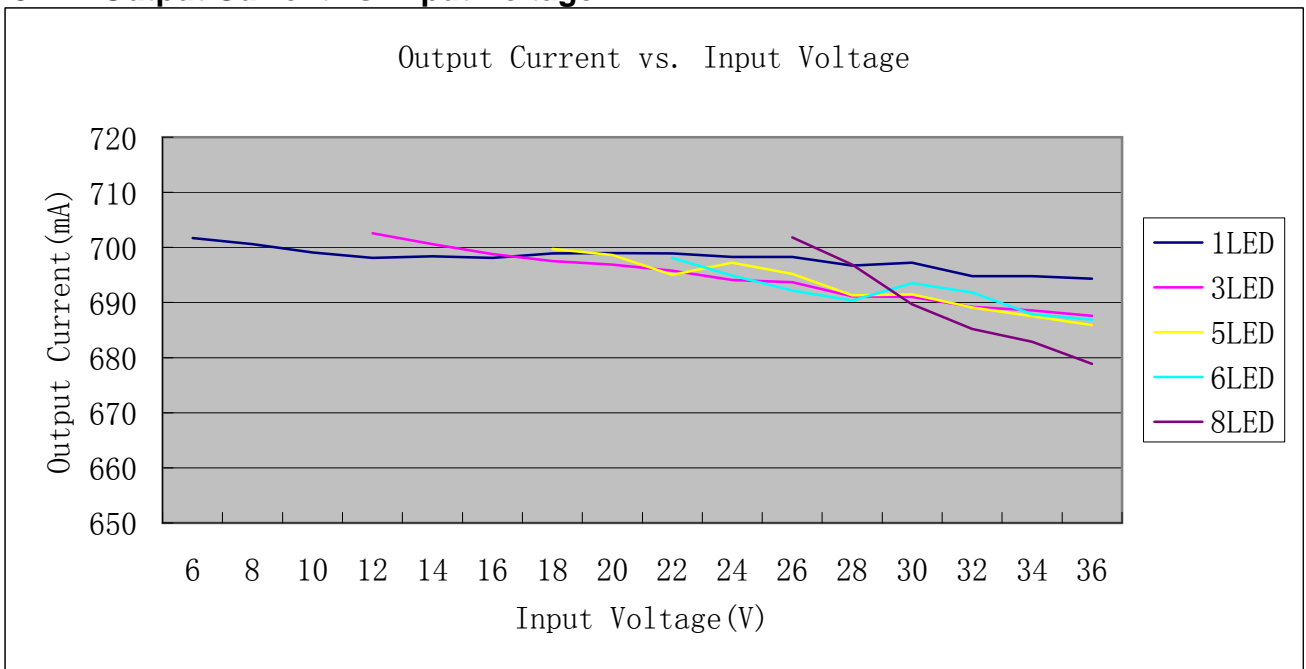


Fig.2 Output Current V.S. Input Voltage



16W LED Driver Using L3010

3.3. Protection

3.3.1. Open Loop Protection

When LED connection is opened , the Output will be limited to Input. Once the condition is removed, and the power will be back to normal output Voltage .

3.3.2. Short Circuit Protection

When Short Circuit Protection condition is removed and the power automatically recover



UNISONIC TECHNOLOGIES CO., LTD

www.unisonic.com.tw