



## SK1901

## LINEAR INTEGRATED CIRCUIT


### HALL-EFFECT SWITCH FOR HIGH-TEMPERATURE OPERATION

#### DESCRIPTION

SK1901 is a semiconductor integrated circuit utilizing the Hall effect. It has been so designed as to operate in the alternating magnetic field especially at low supply voltage and operation over extended temperature ranges to +125 .This Hall IC is suitable for application to various kinds of sensors, contact-less switches, and the like.

#### FEATURES

- \* Wide supply voltage range of 2.5V to 20V
- \*Wide temperature operation range of -20 ~+125
- \*TTL and MOS IC are directly drivable by the output
- \*The life is semipermanent because it employs contact-less parts
- \*SIP-3 package

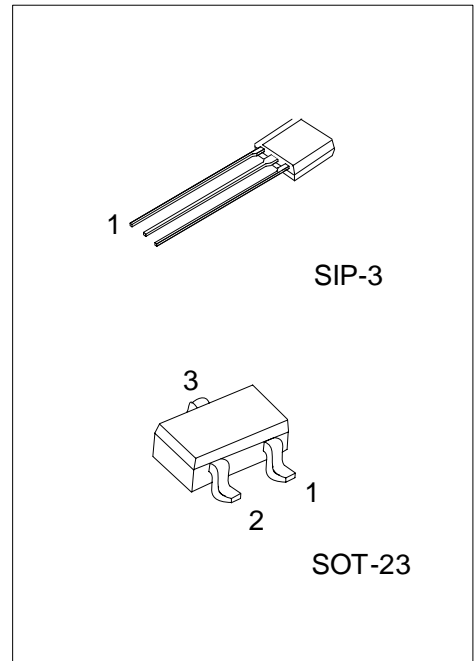

\*Pb-free plating product number: SK1901L

#### ORDERING INFORMATION


Order Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
SK1901-AE3-R	SK1901L-AE3-R	SOT-23	O	I	G	Tape Reel
SK1901-G03-K	SK1901L-G03-K	SIP-3	I	G	O	Bulk

Note: Pin Assignment: I:V<sub>CC</sub> O:V<sub>OUT</sub> G:GND


SK1901L-AE3-R	(1)Packing Type	(1) K: Bulk, R: Tape Reel
	(2)Package Type	(2) AE3: SOT-23, G03: SIP-3
	(3)Lead Plating	(3) L: Lead Free Plating, Blank: Pb/Sn

### MARKING INFORMATION


#### SIP-3

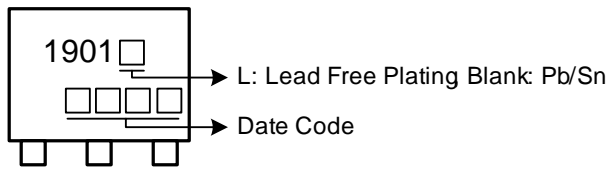

#### SOT-23

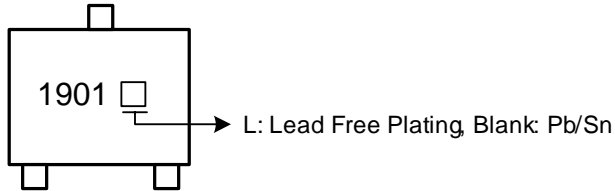

### BLOCK DIAGRAM

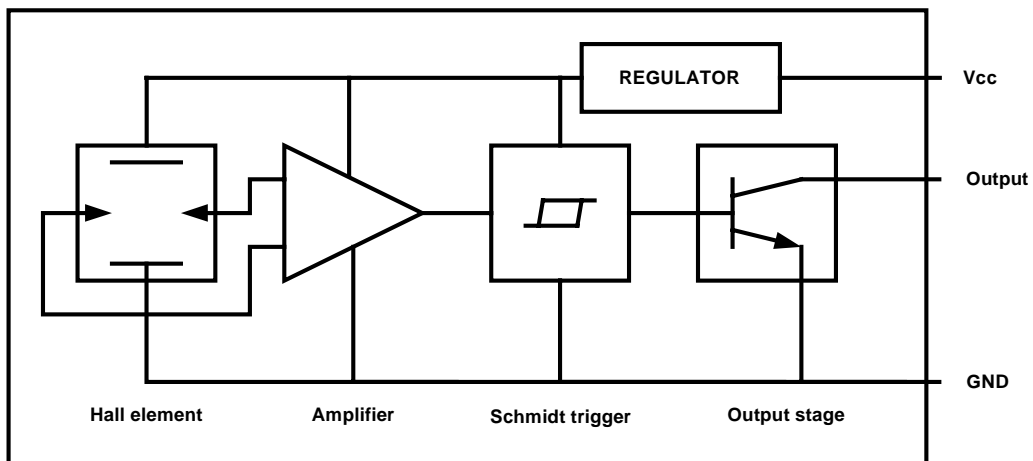

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Supply voltage		$V_{CC}$	2.5V ~ 20V	V
Supply current		$I_{CC}$	10	mA
Circuit current		$I_o$	20	mA
Power dissipation	SIP-3	$P_D$	400	mW
	SOT-23		200	mW
Operating ambient temperature		$T_{OPR}$	-20 ~ +125	
Storage temperature		$T_{STG}$	-55 ~ +150	







Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0 ~ +70 operating temperature range and assured by design from -20 ~ +125 .


■ MAGNETIC CHARACTERISTICS (over operating supply voltage range.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operate Point	$B_{OP}$	at $T_a=+25$			100	G
Release Point	$B_{RP}$	at $T_a=+25$	10			G
Hysteresis	$B_{HYS}$	at $T_a=+25$		90		G







## ■ PACKAGE INFORMATION

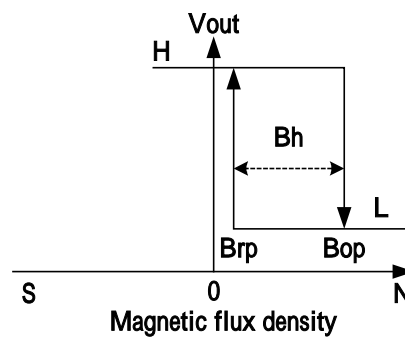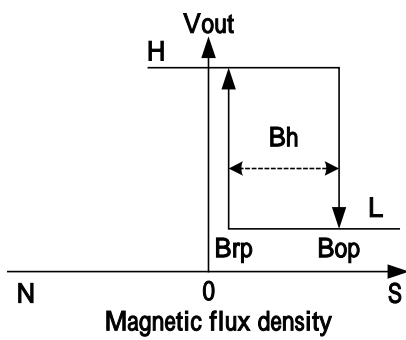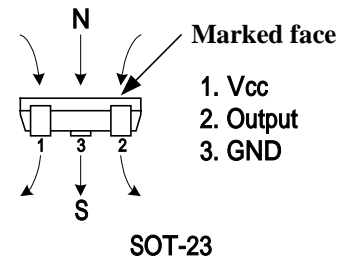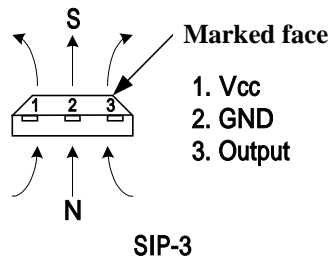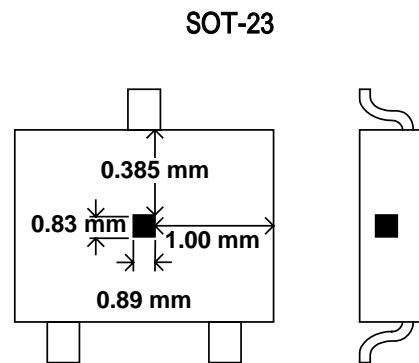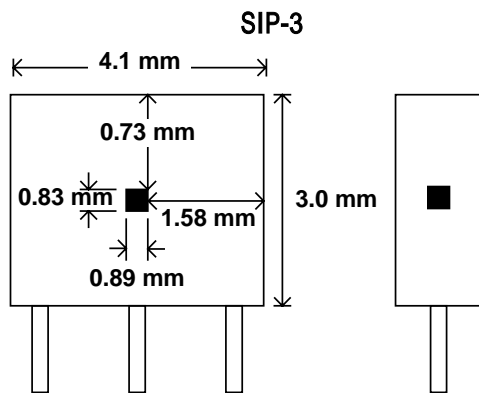







### ■ TYPICAL APPLICATION CIRCUIT

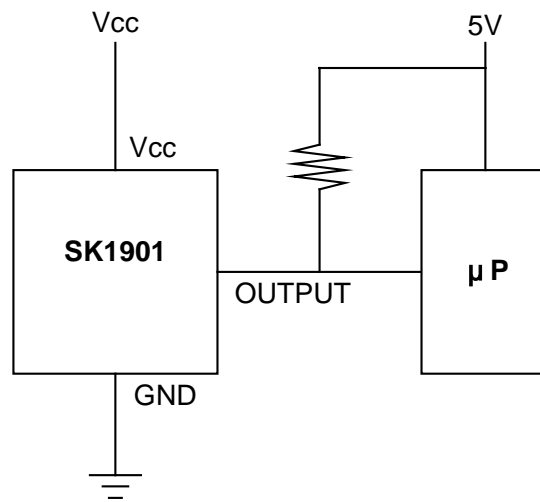

## TYPICAL OPERATING CHARACTERISTICS

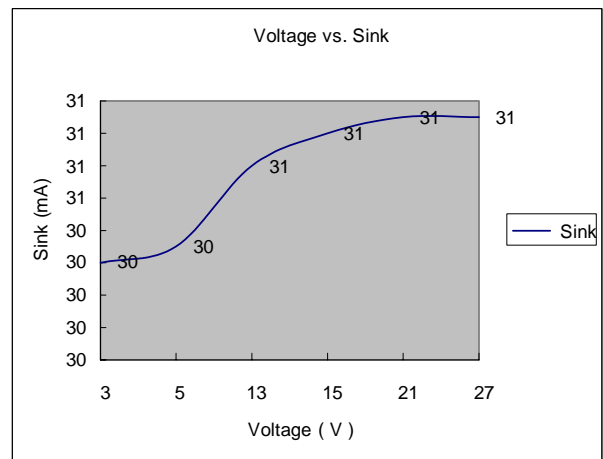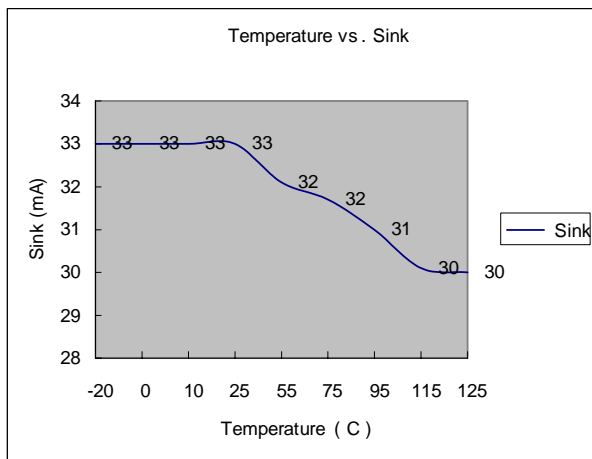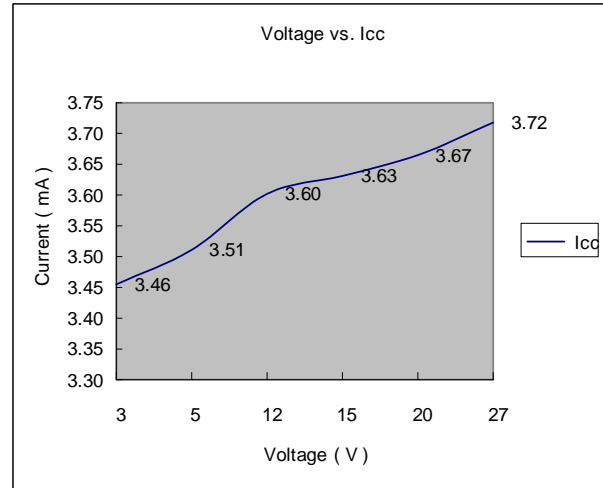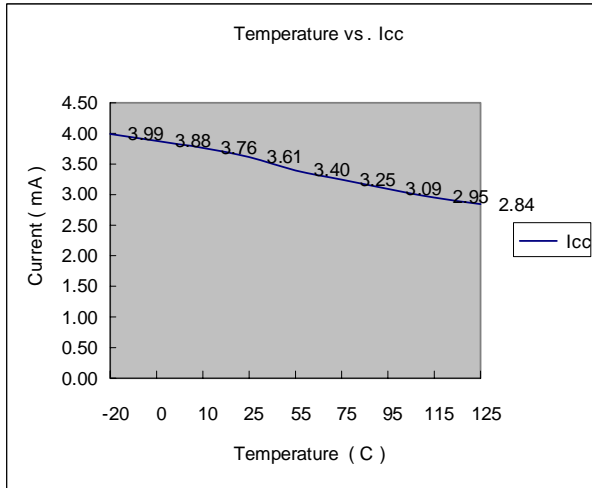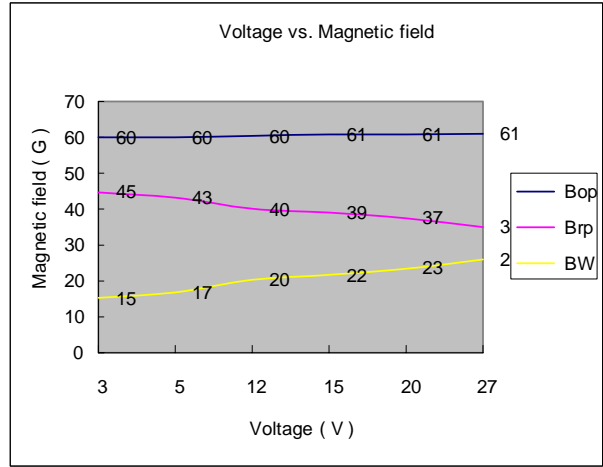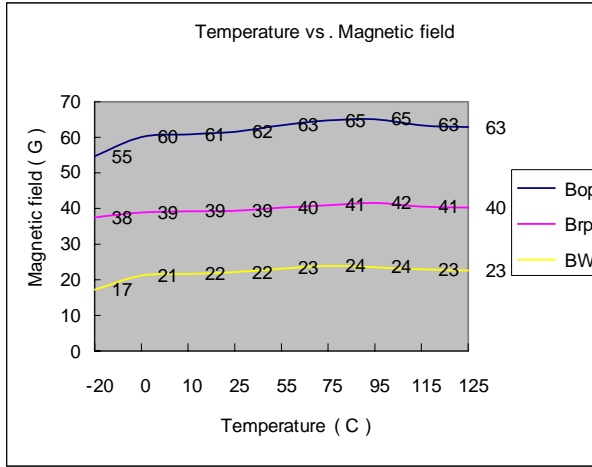

■ TYPICAL OPERATING CHARACTERISTICS (Cont.)

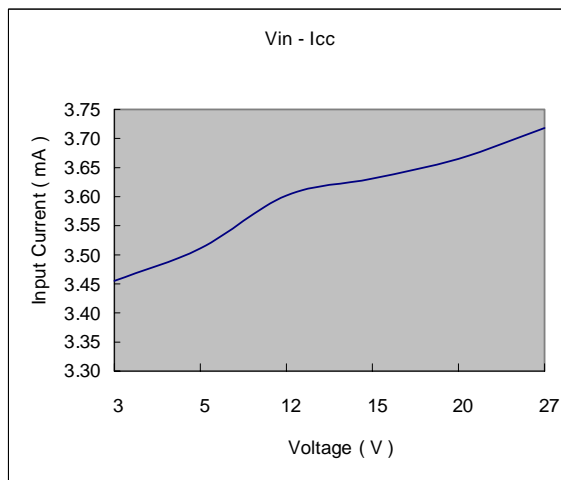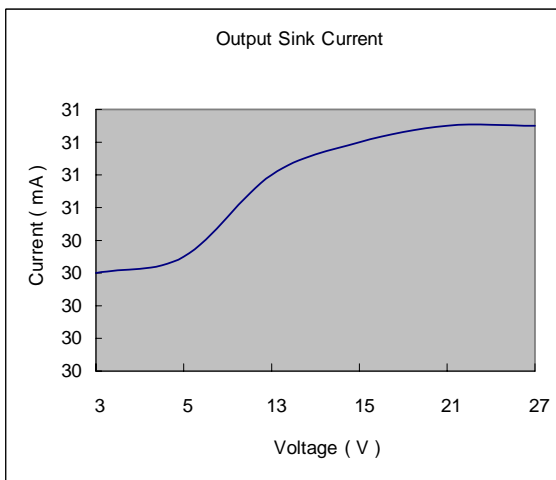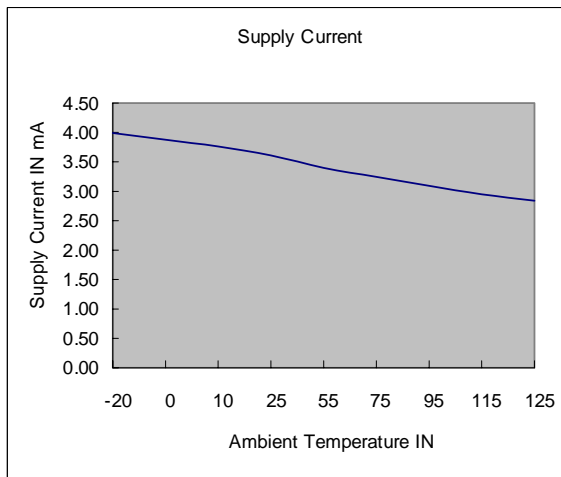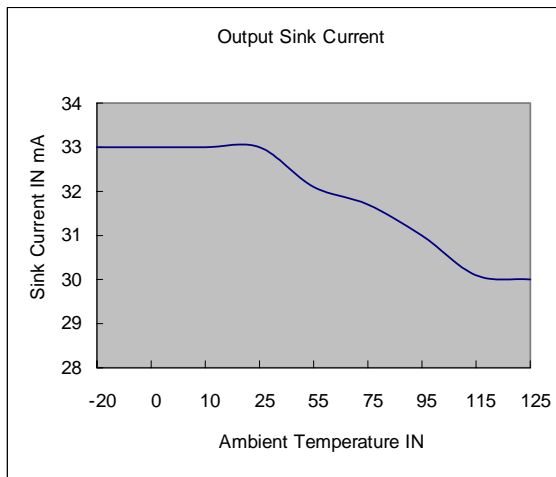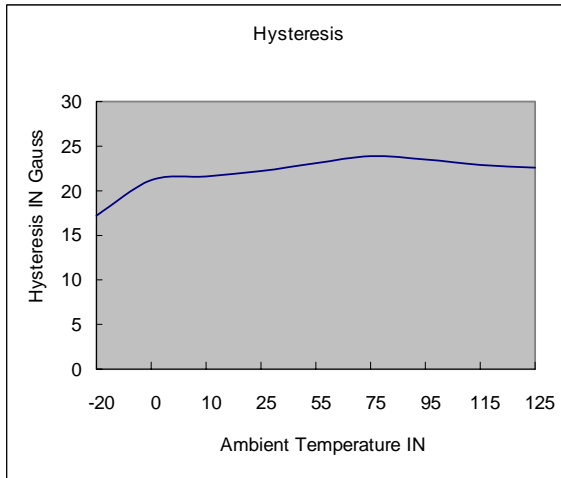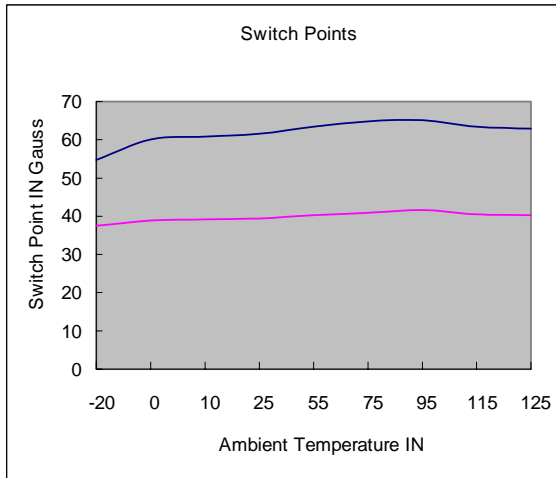

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.