



UZ1086

LINEAR INTEGRATED CIRCUIT


1.5A ADJUSTABLE/FIXED LOW DROPOUT LINEAR REGULATOR

DESCRIPTION

The UTC UZ1086 and UZ1086-1.8V, 2.5V, 2.85V, 3.3V and 5V are low dropout three-terminal regulators with 1.5A output current capability. These devices have been optimized for low voltage where transient response and minimum input voltage are critical. The 2.85V version is designed specifically to be used in Active Terminators for SCSI bus.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload and ambient temperatures that would create excessive junction temperatures.

Unlike PNP type regulators where up to 10% of the output current is wasted as quiescent current, the quiescent current of the UZ1086 flows into the load, increasing efficiency.

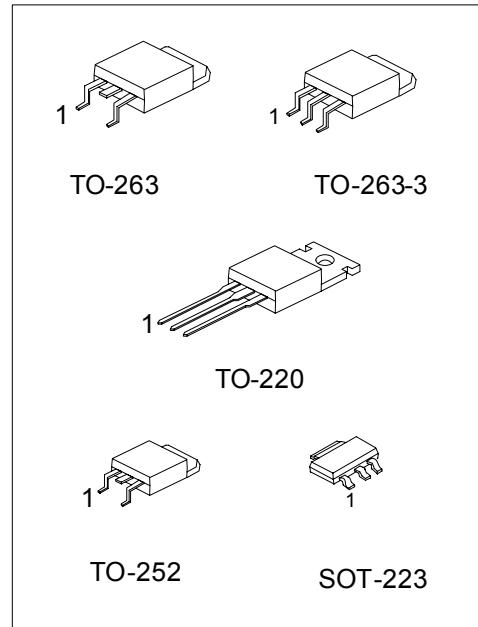

*Pb-free plating product number: UZ1086L-xx

FEATURES

- *Low dropout voltage
- *Load regulation: 0.05% typical
- *Trimmed current limit
- *On-chip thermal limiting
- *Three-terminal adjustable or fixed 1.8V, 2.5V, 2.85V, 3.3V, 5V

ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
UZ1086-xx-AA3-T	UZ1086L-xx-AA3-T	SOT-223	A/G	O	I	Tape Reel
UZ1086-xx-TA3-T	UZ1086L-xx-TA3-T	TO-220	A/G	O	I	Tube
UZ1086-xx-TN3-R	UZ1086L-xx-TN3-R	TO-252	A/G	O	I	Tape Reel
UZ1086-xx-TN3-T	UZ1086L-xx-TN3-T	TO-252	A/G	O	I	Tube
UZ1086-xx-TQ2-R	UZ1086L-xx-TQ2-R	TO-263	A/G	O	I	Tape Reel
UZ1086-xx-TQ2-T	UZ1086L-xx-TQ2-T	TO-263	A/G	O	I	Tube
UZ1086-xx-TQ3-R	UZ1086L-xx-TQ3-R	TO-263-3	A/G	O	I	Tape Reel
UZ1086-xx-TQ3-T	UZ1086L-xx-TQ3-T	TO-263-3	A/G	O	I	Tube

Note: 1. xx: Output Voltage, refer to Marking Information.

2. A: ADJ (for adjustable regulator), G: GND (for fixed regulator)

<p>UZ1086L-xx-TA3-T</p>	<p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Output Voltage Code</p> <p>(4) Lead Plating</p>	<p>(1) R: Tape Reel, T: Tube</p> <p>(2) AA3: SOT-223, TA3: TO-220, TN3: TO-252, TQ2: TO-263, TQ3: TO-263-3</p> <p>(3) xx: refer to Marking Information</p> <p>(4) L: Lead Free Plating Blank: Pb/Sn</p>
-------------------------	--	---

MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
TO-220 TO-252 TO-263 TO-263-3	18 :1.8V 25 :2.5V 2J :2.85V 33 :3.3V 50 :5.0V AD :ADJ	
SOT-223		

THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction-Case	TO-252	12	°C/W
	TO-220	4	
	TO-263	4	
	SOT-223	15	

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	7.5	V
Junction Temperature	T_J	+125	
Operating Temperature	T_{OPR}	-20 ~ +85	
Storage Temperature	T_{STG}	-40 ~ +150	

- Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. The device is guaranteed to meet performance specification within 0 ~+70 operating temperature range and assured by design from -20 ~+85

■ ELECTRICAL CHARACTERISTICS ($V_{IN} \leq 7V$, $T_J = 25^\circ C$, unless otherwise specified.)



PARAMETER	SYMBOL		TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reference Voltage	V_{REF}	*	$1.5V \leq (V_{IN} - V_{OUT}) \leq 5.75V$ $10mA \leq I_{OUT} \leq 1A$	1.225	1.25	1.275	V
Output Voltage	UZ1086-1.8	V_{OUT}	* $3.3V$ $V_{IN} = 7V, 10mA$ $I_{OUT} = 1A$	1.764	1.80	1.836	V
	UZ1086-2.5		* $4V$ $V_{IN} = 7V, 10mA$ $I_{OUT} = 1A$	2.450	2.50	2.550	
	UZ1086-2.85		* $4.35V$ $V_{IN} = 7V, 10mA$ $I_{OUT} = 1A$	2.793	2.85	2.907	
	UZ1086-3.3		* $4.8V$ $V_{IN} = 7V, 10mA$ $I_{OUT} = 1A$	3.234	3.30	3.366	
	UZ1086-5.0		* $6.5V$ $V_{IN} = 7V, 10mA$ $I_{OUT} = 1A$	4.900	5.00	5.100	
Line Regulation (Note1,2)	ΔV_{OUT}	*	$(V_{OUT} + 1.5V) \leq V_{IN} \leq 7V, I_{OUT} = 10mA$		0.005	0.2	%
Load Regulation (Note1,2)	ΔV_{OUT}	*	$V_{IN} - V_{OUT} = 2V, 10mA \leq I_{OUT} \leq 1A$		0.05	0.5	%
Dropout Voltage	V_D	*	$\Delta V_{REF} = 1\%, I_{OUT} = 1.5A$		1.30	1.50	V
Current Limit	I_{LIMIT}	*	$V_{IN} - V_{OUT} = 2V$	1.6	2		A
Adjust Pin Current	I_{adj}	*			35	120	μA
Adjust Pin Current Change	ΔI_{adj}	*	$1.5V \leq (V_{IN} - V_{OUT}) \leq 5.75V$ $10mA \leq I_{OUT} \leq 1A$		0.2	5	μA
Minimum Load Current	$I_{O(min)}$	*	$1.5V \leq (V_{IN} - V_{OUT}) \leq 5.75V$	10			mA
Quiescent Current	I_Q	*	$V_{IN} = V_{OUT} + 1.25V$		4	13	mA
Ripple Rejection	RR		$f = 120Hz, C_{OUT} = 22\mu F, \text{Tantalum}$ $V_{IN} - V_{OUT} = 3V, I_{OUT} = 1.5A$	60	72		dB
Thermal Regulation			$T_a = 25^\circ C, 30ms \text{ pulse}$		0.004	0.02	%/W
Temperature Stability	ΔV_{OUT}	*			0.5		%
Long-Term Stability	ΔV_{OUT}		$T_a = 125^\circ C, 1000hrs$		0.03	1.0	%
RMS Output Noise	V_{OUT}		$T_a = 25^\circ C, 10Hz \leq f \leq 10kHz$		0.003		%
Thermal shutdown			Junction Temperature		155		
Thermal Shutdown Hysteresis					10		

Note:

* stand for specifications which apply over the designed operating temperature range.

- See thermal regulation specifications for changes in output voltage due to heating effects. Load and line regulation are measured at a constant junction temperature by low duty cycle pulse testing.
- Line and load regulation are guaranteed up to the maximum power dissipation. Power dissipation is determined by input/output differential and the output current. Guaranteed maximum output power will not be available over the full input/output voltage range.

■ TYPICAL APPLICATION CIRCUIT

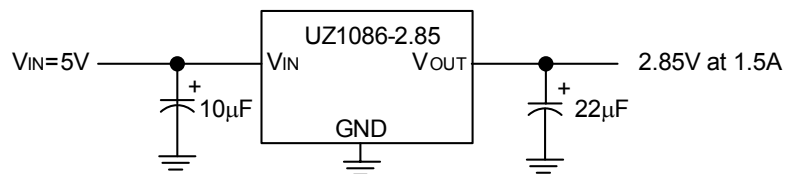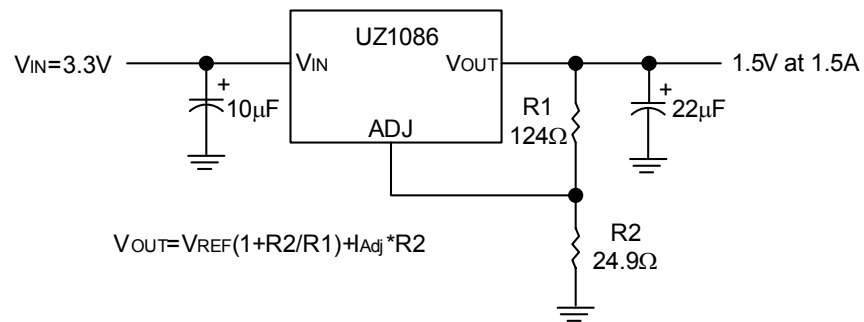

TYPICAL CHARACTERISTICS

Figure 1. Dropout Voltage vs. Output Current

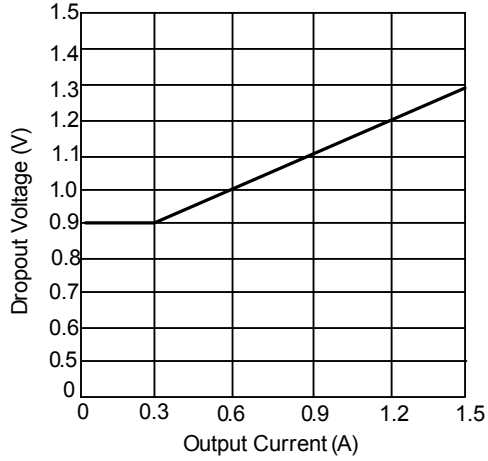


Figure 2. Load Regulation vs. Temperature

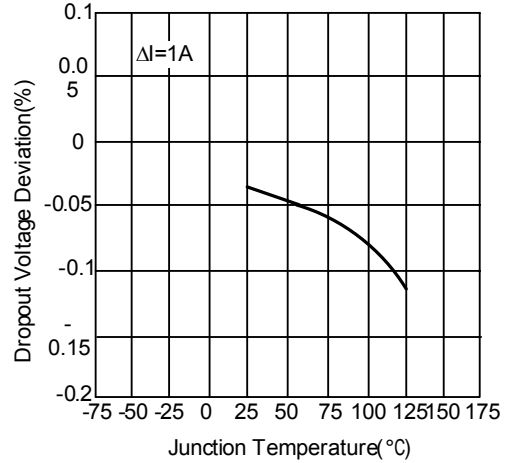


Figure 3. Reference Voltage vs. Temperature

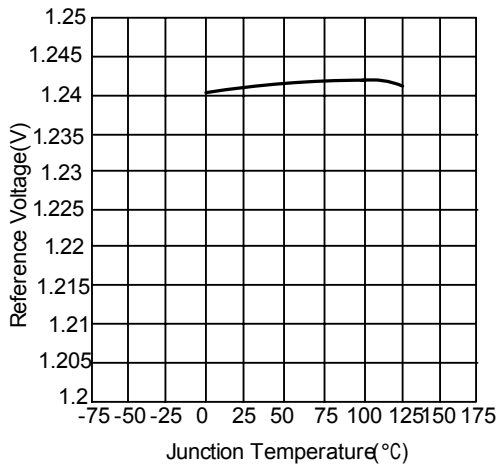


Figure 4. Output Voltage vs. Temperature

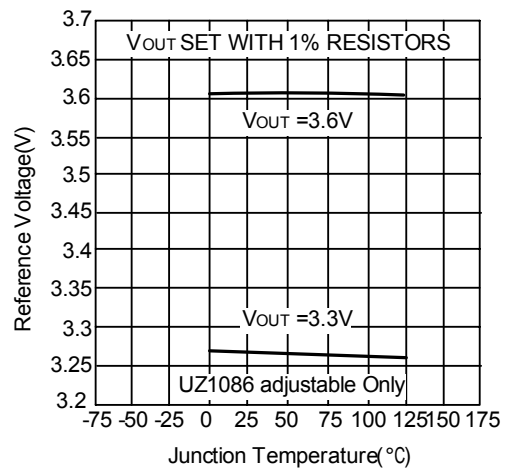


Figure 5. Minimum Load Current vs. Temperature




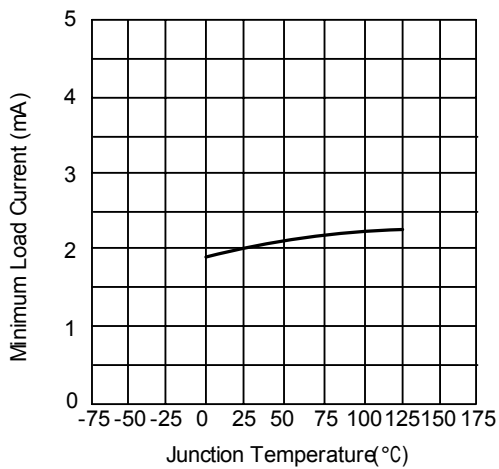


Figure 6. Adjust Pin Current vs. Temperature

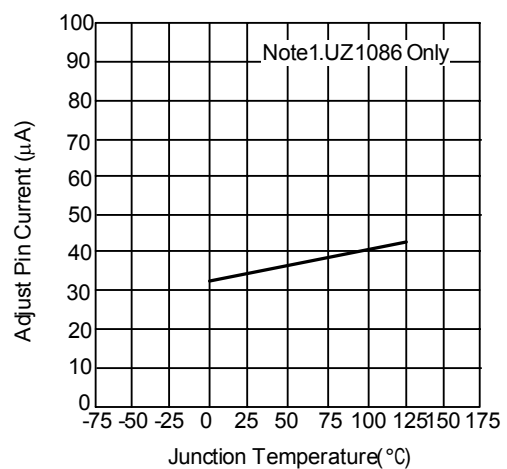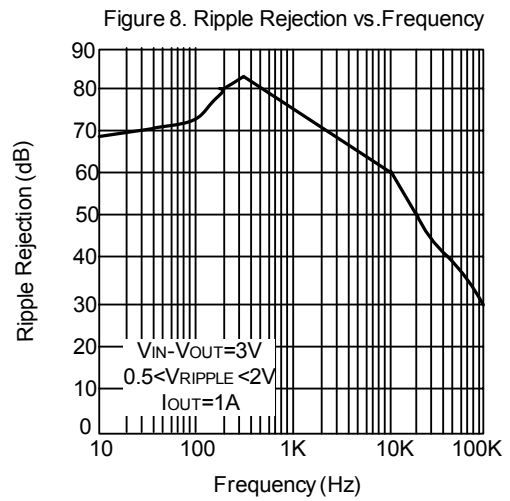

■ TYPICAL CHARACTERISTICS(Cont.)

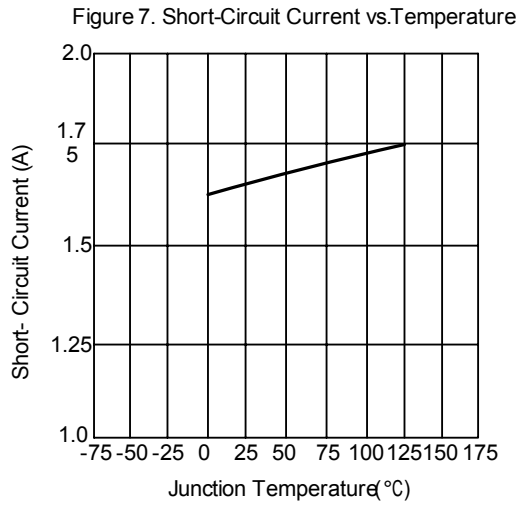

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.