



LM556

LINEAR INTEGRATED CIRCUIT


DUAL TIMER

DESCRIPTION

The UTC **LM556** dual monolithic circuit is a highly stable controller capable of producing accurate delays or oscillation. The UTC **LM556** is the dual of UTC NE555; timing is provided an external resistor and capacitor for each function. The two timers operate independently of each other, sharing only V_{CC} and GND. The circuits may be triggered and reset on falling wave forms. The output structures may sink or source 200mA.

FEATURES

- *High Current Driver Capability(=200mA)
- *Adjustable Duty Cycle
- *Timing From μ Sec to Hours
- *Temperature Stability of 0.005%/ $^{\circ}$ C
- *TTL Compatible
- *Operates in Both Astable and Monostable Modes

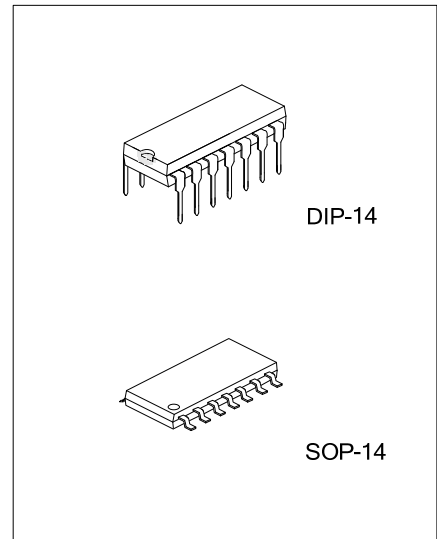


ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
LM556L-D14-T	LM556G-D14-T	DIP-14	Tube
LM556L-S14-R	LM556G-S14-R	SOP-14	Tape Reel

<p>LM556G-D14-T</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) T: Tube, R: Tape Reel (2) D14: DIP-14, S14: SOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--

MARKING

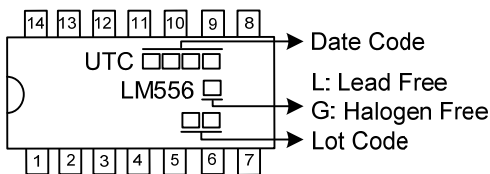

■ BLOCK DIAGRAM

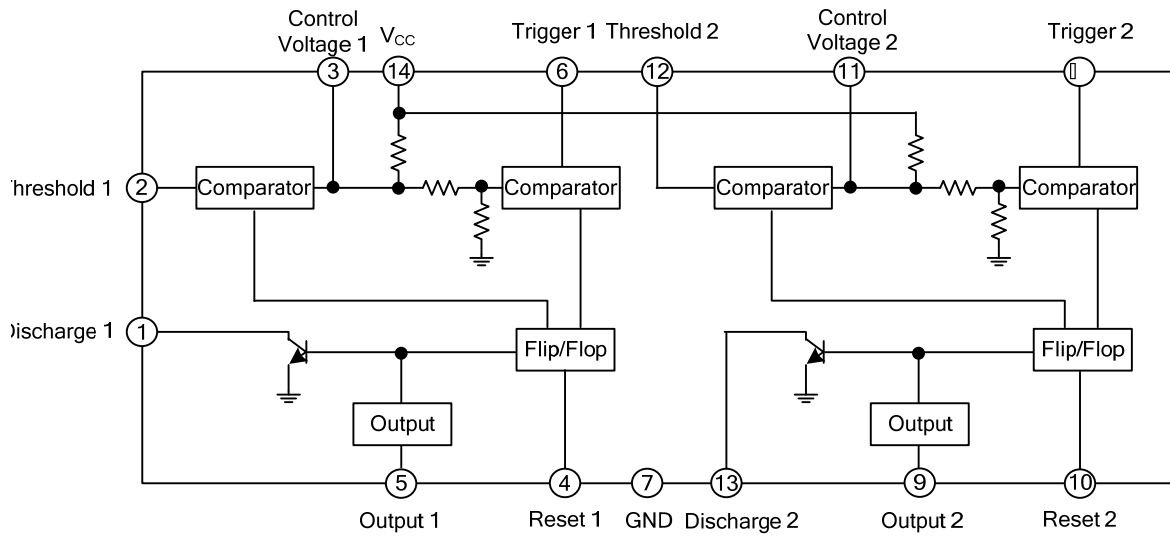

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	16	V
Power Dissipation	P_D	600	mW
Lead Temperature(soldering 10 sec.)	T_{LEAD}	300	$^\circ\text{C}$
Operating Temperature	T_{OPR}	-20 ~ +85	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, $V_{CC}=5$ to 15V, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply voltage	V_{CC}		4.5		16	V
Supply Current(two timers) (low state), (Note 1)	I_{CC}	$V_{CC}=5\text{V}$, $R_L=\infty$		5	12	mA
		$V_{CC}=15\text{V}$, $R_L=\infty$		16	30	mA
TIMING ERROR (MONOSTABLE)						
Initial Accuracy (Note 2)	A_{CCUR}	$R_A=2\text{K}\Omega$ to $100\text{K}\Omega$ $C=0.1\mu\text{F}$, $T=1.1\text{RC}$		0.75		%
Drift with Temperature	$\Delta t/\Delta T$			50		ppm/ $^\circ\text{C}$
Drift with Supply Voltage	$\Delta t/\Delta V_{CC}$			0.1		%/V
TIMING ERROR (ASTABLE)						
Initial Accuracy (Note 2)	A_{CCUR}	$R_A=1\text{K}\Omega$ to $100\text{K}\Omega$ $C=0.1\mu\text{F}$, $V_{CC}=15\text{V}$		2.25		%
Drift with Temperature	$\Delta t/\Delta T$			150		ppm/ $^\circ\text{C}$
Drift with Supply Voltage	$\Delta t/\Delta V_{CC}$			0.3		%/V
Control Voltage	V_C	$V_{CC}=15\text{V}$	9.0	10.0	11.0	V
		$V_{CC}=5\text{V}$	2.6	3.33	4.0	V
Threshold Voltage	V_{TH}	$V_{CC}=15\text{V}$	8.8	10.0	11.2	V
		$V_{CC}=5\text{V}$	2.4	3.33	4.2	V
Threshold Current (Note 3)	I_{TH}			30	250	nA
Trigger Voltage	V_{tR}	$V_{CC}=5\text{V}$	1.1	1.6	2.2	V
		$V_{CC}=15\text{V}$	4.5	5	5.6	V
Trigger Current	I_{tR}	$V_{IR}=0$		0.01	2.0	μA
Reset Voltage (Note 4)	V_{RST}		0.28	0.4	1.12	V
Reset Current	I_{RST}			0.03	0.6	mA
Low Output Voltage	V_{OL}	$V_{CC}=15\text{V}$, $I_{SINK}=10\text{mA}$		0.1	0.25	V
		$V_{CC}=15\text{V}$, $I_{SINK}=50\text{mA}$		0.4	0.75	V
		$V_{CC}=15\text{V}$, $I_{SINK}=100\text{mA}$		2	3.2	V
		$V_{CC}=15\text{V}$, $I_{SINK}=200\text{mA}$		2.5		V
		$V_{CC}=5\text{V}$, $I_{SINK}=5\text{mA}$		0.15	0.25	V
		$V_{CC}=5\text{V}$, $I_{SINK}=8\text{mA}$		0.25	0.35	V
High Output Voltage	V_{OH}	$V_{CC}=15\text{V}$, $I_{SOURCE}=200\text{mA}$		12.5		V
		$V_{CC}=15\text{V}$, $I_{SOURCE}=100\text{mA}$	12.75	13.3		V
		$V_{CC}=5\text{V}$, $I_{SOURCE}=100\text{mA}$	2.75	3.3		V
Rise Time of Output	t_R			100	300	nSec
Fall Time of Output	t_F			100	300	nSec
Discharge Leakage Current	I_{LKG}			20	100	nA

■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
MATCHING PARAMETER						
Initial Accuracy (Note 5)	A_{CCUR}	$R_A, R_B=1\text{K}\Omega$ to $100\text{K}\Omega$ $C=0.1\mu\text{F}$, $V_{\text{CC}}=15\text{V}$		1	2	%
Drift with Temperature	$\Delta t/\Delta T$			10		ppm/ $^{\circ}\text{C}$
Drift with Supply Voltage	$\Delta t/\Delta V_{\text{CC}}$			0.2	0.5	%/V

Notes: 1. Supply current when output is high is typically 1mA less at V_{CC} 5V.

2. Tested at $V_{\text{CC}}=5\text{V}$ and $V_{\text{CC}}=15\text{V}$.

3: This will determine the maximum value of R_A+R_B for 15V operation, The maximum total is $R=20\text{M}\Omega$, and for 5V operation the maximum total is $R=6.6\text{M}\Omega$.

4: As reset voltage lower, timing is inhibited and then the output goes low.

5: Matching parameters refer to the difference between performance parameters of each timer section in the monostable mode.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.