



MC4556


LINEAR INTEGRATED CIRCUIT

DUAL OPERATIONAL AMPLIFIER

■ DESCRIPTION

The UTC MC4556 integrated circuit is a high-gain, high output current dual operational amplifier capable of driving $\pm 70\text{mA}$ into 150Ω loads ($\pm 10.5\text{V}$ output voltage), and operating low supply voltage ($V+/V- = \pm 2\text{V}$).

The UTC MC4556 combines many of the features of the popular UTC MC4558 as well as having the capability of driving 150Ω loads. In addition, the wide band-width, low noise, high slew rate and low distortion of the UTC MC4556 make it ideal for many audio, telecommunications and instrumentation applications.

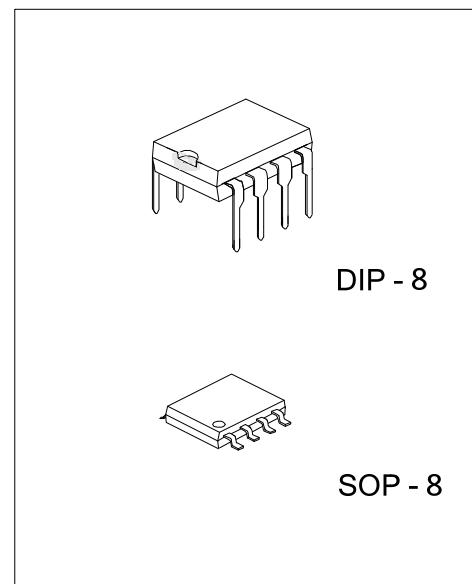

■ FEATURES

- * Operating Voltage ($\pm 2\text{V} \sim \pm 18\text{V}$)
- * High Output Current ($I_{\text{OUT}}=70\text{mA}$)
- * Slew Rate ($3\text{V} / \mu\text{s}$ typ.)
- * Gain Band Width Product (8MHz typ.)
- * Bipolar Technology

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
MC4556L-D08-T	MC4556G-D08-T	DIP-8	Tube
-	MC4556G-S08-R	SOP-8	Tape Reel

MC4556L-D08-T 	(1)T: Tube, R: Tape Reel (2)D08: DIP-8, S08: SOP-8 (3)L: Lead Free, G: Halogen Free and Lead Free
-------------------	---------------------------------------------------------------------------------------------------------


■ MARKING

DIP-8	SOP-8

■ PIN CONFIGURATION

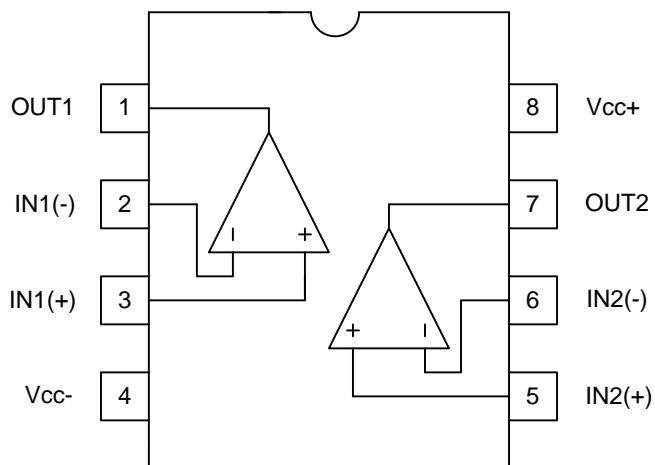

■ BLOCK DIAGRAM

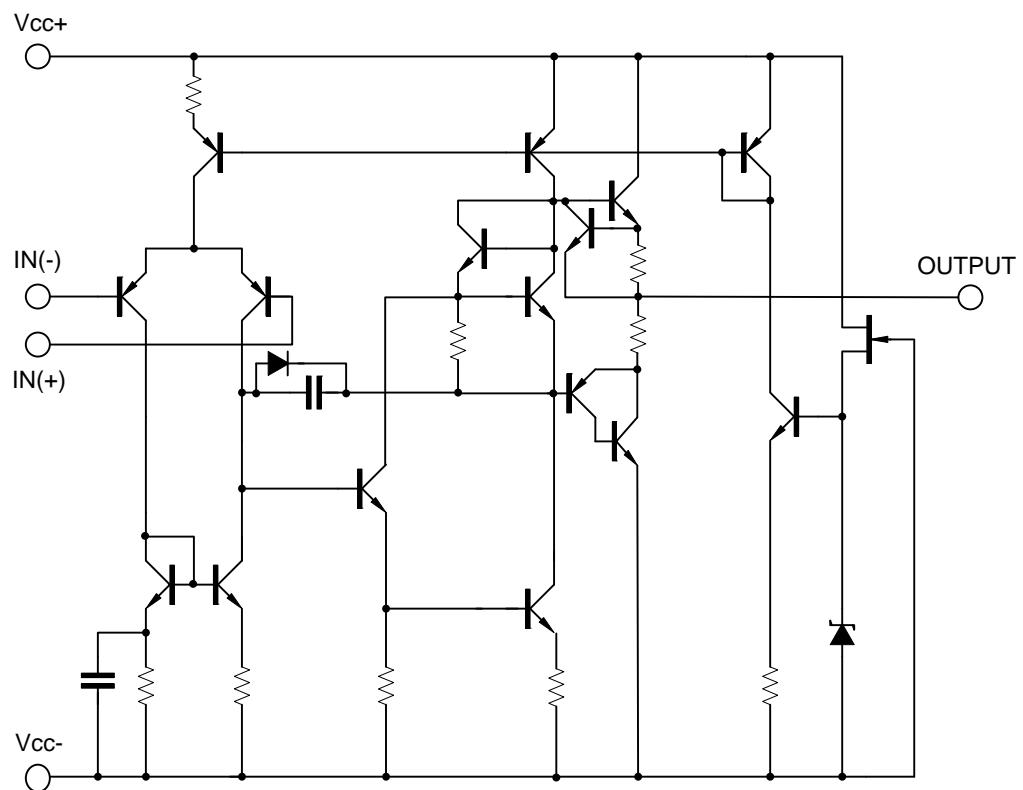

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V+/V-$	± 18	V
Differential Input Voltage	$V_{I(\text{DIFF})}$	± 30	V
Input Voltage	V_{IN}	± 15 (Note 1)	V
Power Dissipation	DIP-8	700	mW
	SOP-8	300	
Operating Temperature	T_{OPR}	-20 ~ +75	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +125	$^\circ\text{C}$

Note: 1. For supply voltage less than $\pm 15\text{V}$, the absolute maximum input voltage is equal to the supply voltage.







2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.







■ ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V+/V-=\pm 15\text{V}$)

PARAMETER	SYMBOL	TEST CONDUCTION	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{I(\text{OFF})}$	$R_s \leq 10\text{k}\Omega$	0.5	6		mV
Input Offset Current	$I_{I(\text{OFF})}$			5	60	nA
Input Bias Current	$I_{I(\text{BIAS})}$			50	500	nA
Input Resistance	R_{IN}		0.3	5		$\text{M}\Omega$
Large Signal Voltage Gain	G_v	$R_L \geq 2\text{k}\Omega$, $V_{OUT} = \pm 10\text{V}$	86	100		dB
Maximum Output Voltage 1	V_{OM1}	$R_L \geq 2\text{k}\Omega$	± 12.0	± 13.5		V
Maximum Output Voltage 2	V_{OM2}	$R_L \geq 150\Omega$	± 10.5	± 11.0		V
Input Common Mode Voltage Range	$V_{I(\text{CM})}$		± 13.5	± 14.0		V
Common Mode Rejection Ratio	CMR	$R_s \leq 10\text{k}\Omega$	70	90		dB
Supply Voltage Rejection Ratio	SVR	$R_s \leq 10\text{k}\Omega$	76.5	90		dB
Operating Current	I_{CC}			9	12	mA
Slew Rate	SR			3		$\text{V}/\mu\text{s}$
Unity Gain Bandwidth	GB_W			8		MHz

■ TYPICAL CHARACTERISTICS

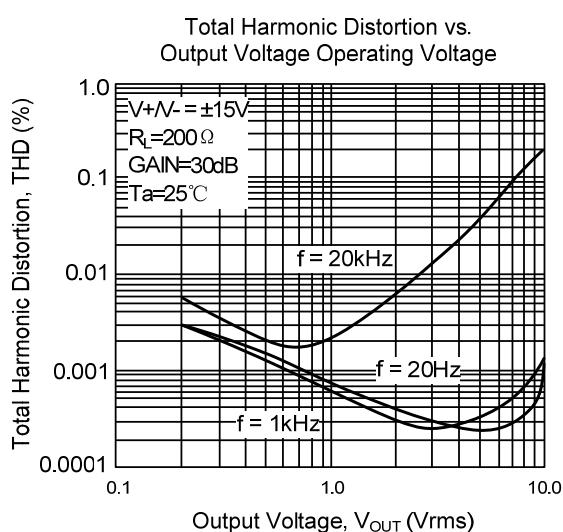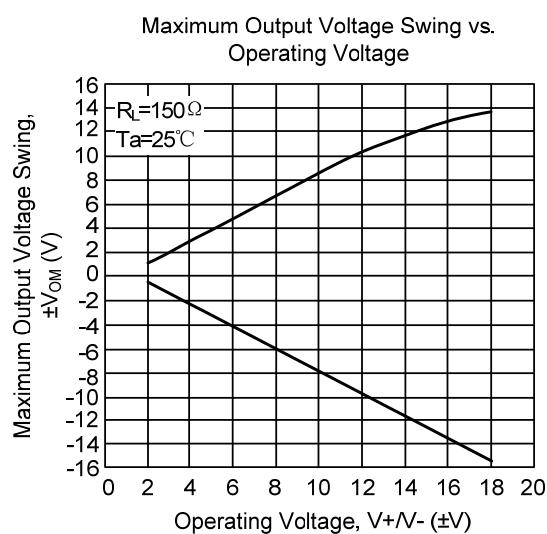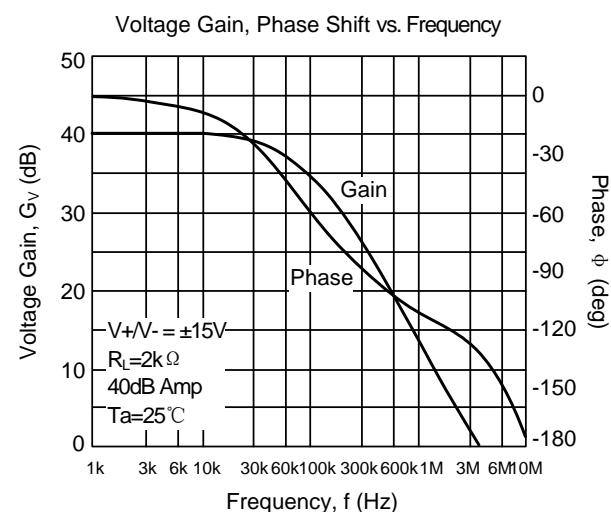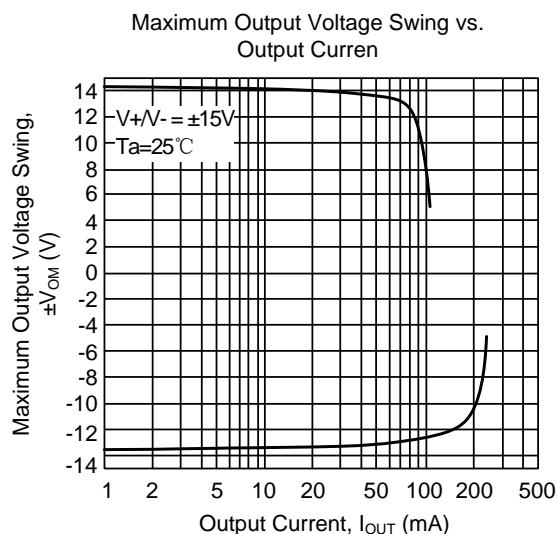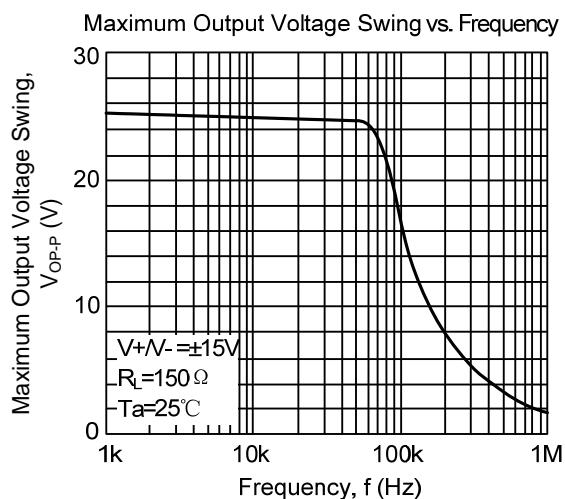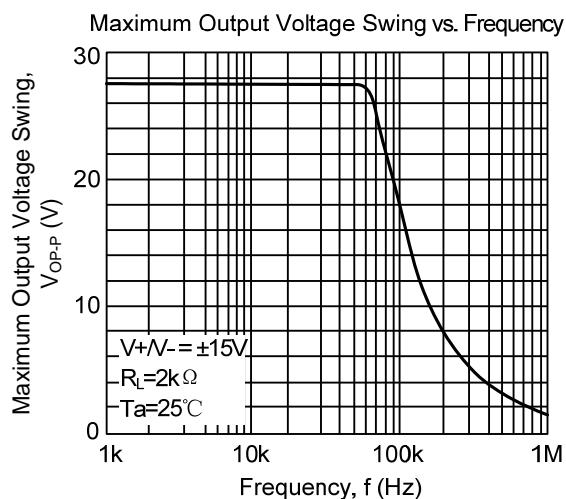

■ TYPICAL CHARACTERISTICS(Cont.)

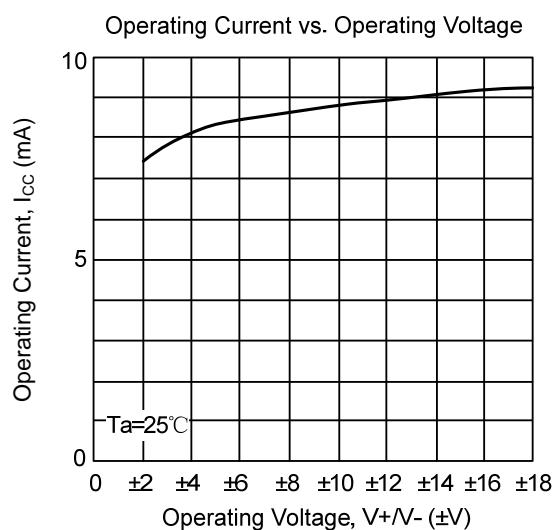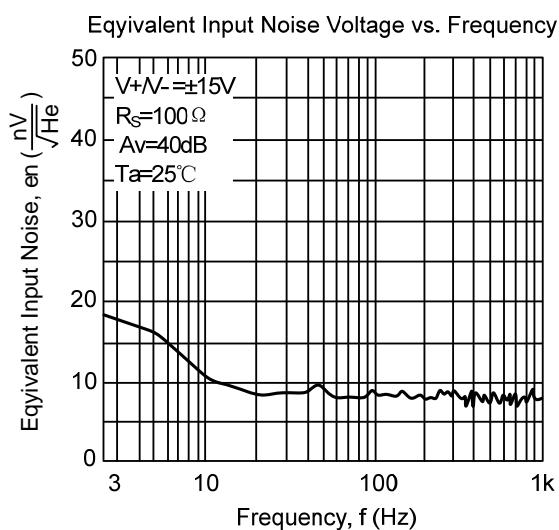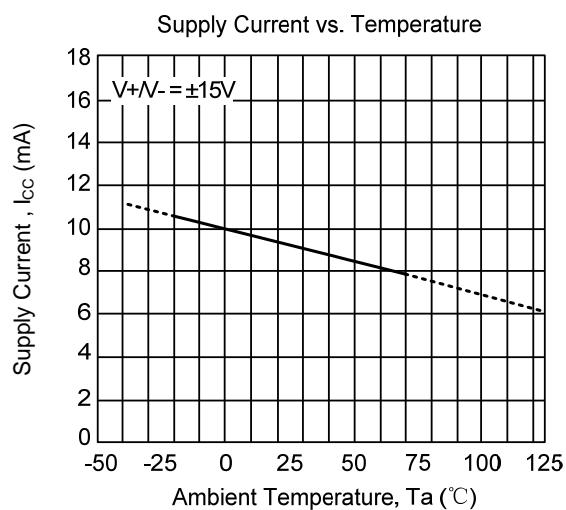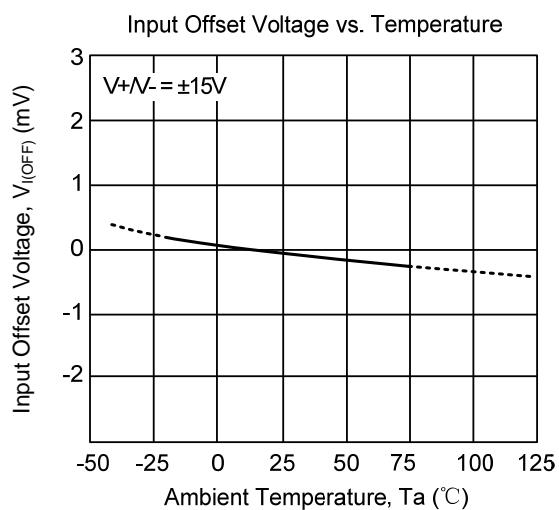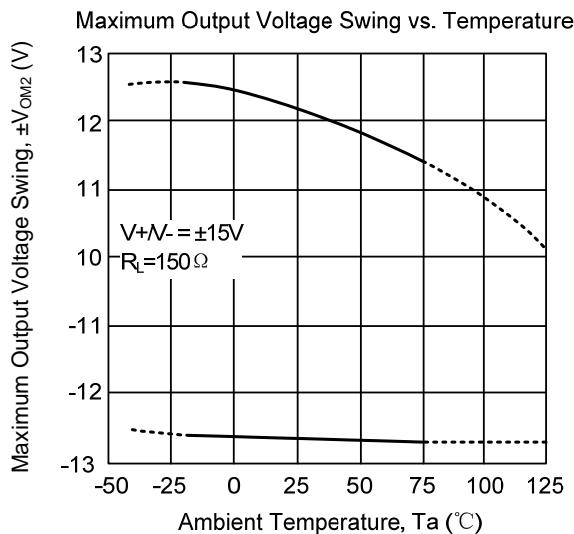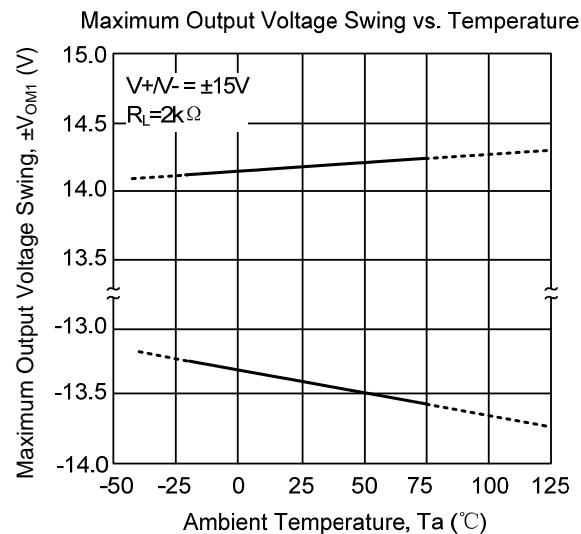

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

