



BA6220

LINEAR INTEGRATED CIRCUIT


GENERAL USE ELECTRONIC GOVERNOR

DESCRIPTION

The UTC BA6220 is a monolithic integrated circuit, developed for speed control of general use DC motors.

FEATURES

- * Wide range of working power supply voltage range ($V_{CC} = 3.5V - 16V$).
- * Very large starting torque at the low voltage.
- * Large permissible loss due to effective utilization of substrate radiation.
- * Usable for various DC motors by means of changing constants of the external components.

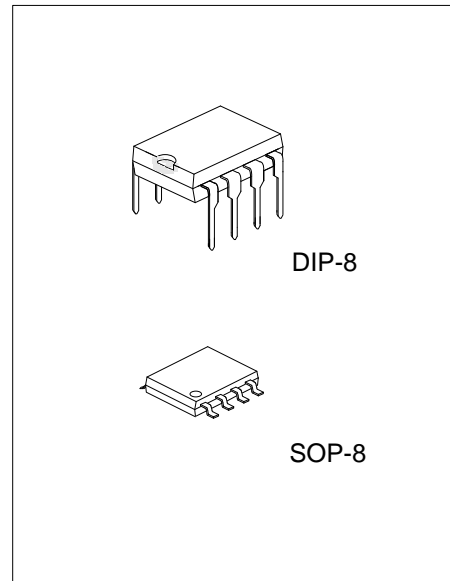

APPLICATION

- * Radio cassette tape recorders

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
BA6220L-D08-T	BA6220G-D08-T	DIP-8	Tube
BA6220L-S08-R	BA6220G-S08-R	SOP-8	Tape Reel

<p>BA6220G-D08-T</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) T: Tube, R: Tape Reel (2) D08: DIP-8, S08: SOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---


MARKING

DIP-8	SOP-8
<p>UTC □□□□ BA6220 □□ □□</p> <p>→ Date Code → L: Lead Free → G: Halogen Free → Lot Code</p>	<p>UTC □□□□ BA6220 □□ □□</p> <p>→ Date Code → L: Lead Free → G: Halogen Free → Lot Code</p>

■ PIN CONFIGURATION

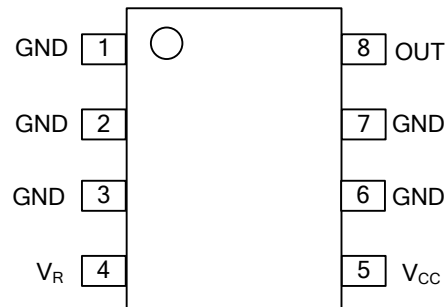

■ BLOCK DIAGRAM

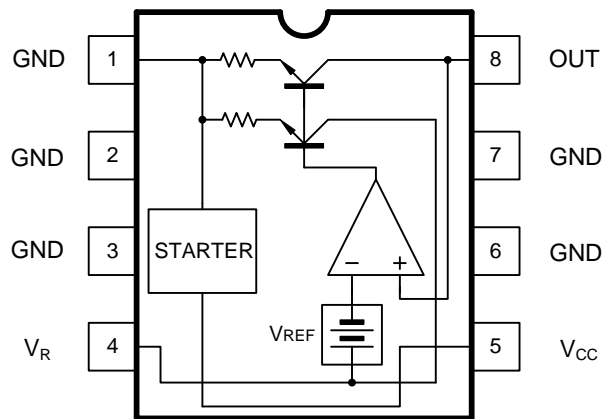

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^\circ\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	18	V
Power Dissipation (Note 2)	DIP-8	1.4	W
	SOP-8	0.8	W
Operating Temperature	T_{OPR}	-25 ~ +75	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +125	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. PCB (Copper-surfaced) 9cm^2 , T 1.0mm.


■ **RECOMMENDED OPERATING CONDITIONS** ($T_A=25^\circ\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Operating Supply Voltage	V_{CC}	Loader: 8g-cm	3.5		16	V

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^\circ\text{C}$, $V_{CC}=12\text{V}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Saturate Voltage	V_{SAT}	$V_{CC}=4.2\text{V}$, $R_M=4.4\Omega$ (Fig.3)		1.5	2.3	V
Reference Voltage	V_{REF}	$I_M=10\text{Ma}$ (Fig.1)	1.10	1.27	1.40	V
Current Ratio	K	$R_M=33 - 44\Omega$ (Fig.2)	18	20	22	
Voltage Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta V_{CC}$	$I_M=100\text{mA}$, $V_{CC}=6.3 - 16\text{V}$ (Fig.1)		0.06		%/V
Voltage Feature of Current Ratio	$\Delta K/K/\Delta V_{CC}$	$I_M=100\text{mA}$, $V_{CC}=6.3 - 16\text{V}$ (Fig.2)		0.4		%/V
Bias Current	IBIAS	$R_M=180\Omega$ (Fig.4)	0.5	0.8	1.2	mA
Current Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta I_M$	$I_M=30 - 200\text{mA}$ (Fig.1)		-0.02		%/mA
Current Feature of Current Ratio	$\Delta K/K/\Delta I_M$	$I_M=30 - 200\text{mA}$ (Fig.2)		-0.02		%/mA
Temperature Feature of Reference Voltage	$\Delta V_{REF}/V_{REF}/\Delta T_A$	$I_M=100\text{mA}$, $T_A=-25 \sim 75^\circ\text{C}$ (Fig.1)		0.01		%/ $^\circ\text{C}$
Temperature Feature of Current ratio	$\Delta K/K/\Delta T_A$	$I_M=100\text{mA}$, $T_A=-25 \sim 75^\circ\text{C}$ (Fig.2)		0.01		%/ $^\circ\text{C}$

APPLICATION CIRCUIT

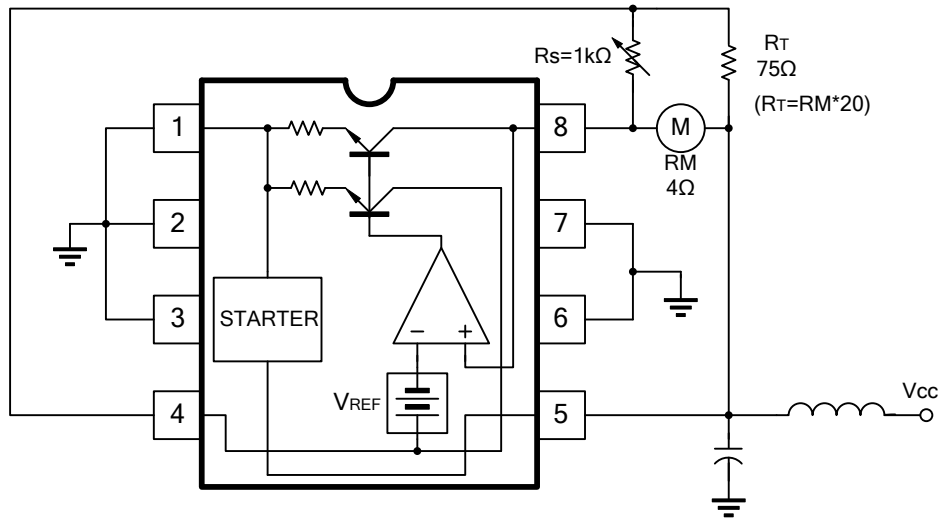

TEST CIRCUIT




Fig. 1

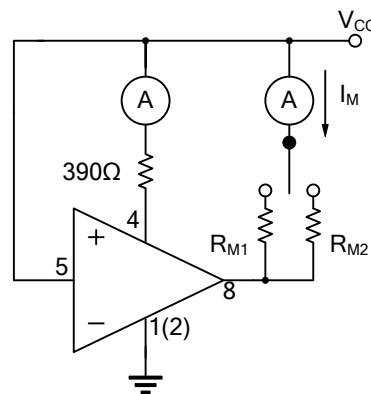


Fig. 2




Fig. 3

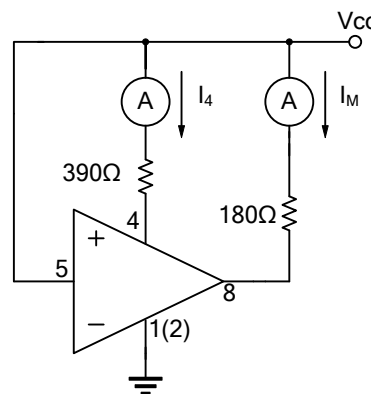


Fig. 4

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.