



MBR10150C

DIODE

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

DESCRIPTION


The UTC **MBR10150C** is a high voltage dual schottky rectifier, providing the designers with high current capacity and guard-ring for stress protection.

The UTC **MBR10150C** is suitable for medium voltage operation and high frequency circuits where low switching losses and low noise are required

FEATURES

- * High surge capacity
- * Low Forward Voltage
- * Guard-ring for stress protection

SYMBOL





ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
MBR10150CL-TA3-T	MBR10150CG-TA3-T	TO-220	A	K	A	Tube
MBR10150CL-TF1-T	MBR10150CG-TF1-T	TO-220F1	A	K	A	Tube
MBR10150CL-TF2-T	MBR10150CG-TF2-T	TO-220F2	A	K	A	Tube
MBR10150CL-TF3-T	MBR10150CG-TF3-T	TO-220F	A	K	A	Tube
MBR10150CL-TQ2-T	MBR10150CG-TQ2-T	TO-263	A	K	A	Tube
MBR10150CL-TQ2-R	MBR10150CG-TQ2-R	TO-263	A	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>MBR10150CG-TA3-T</p> <p>(1)Packing Type</p> <p>(2)Package Type</p> <p>(3)Green Package</p>	<p>(1) T: Tube, R: Tape Reel</p> <p>(2) TA3: TO-220, TF1: TO-220F1, TF2: TO-220F2, TF3: TO-220F, TQ2: TO-263</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

MARKING

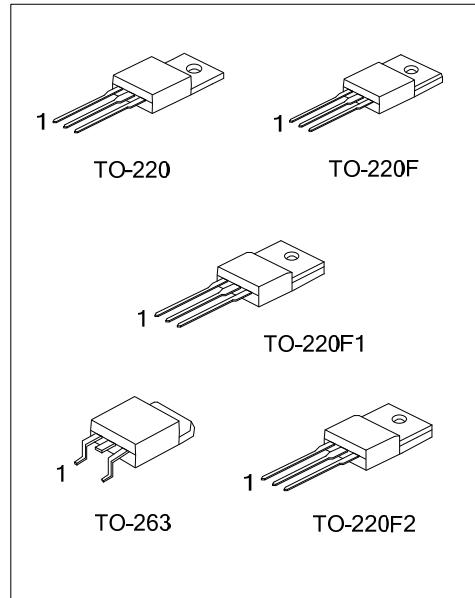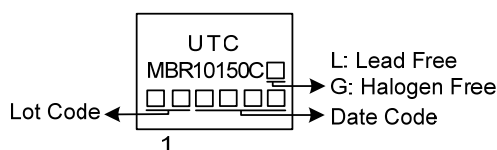

■ ABSOLUTE MAXIMUM RATINGS (PER LEG)

PARAMETER		SYMBOL	RATINGS	UNIT
DC Blocking Voltage		V_R	150	V
Peak Repetitive Reverse Voltage		V_{RRM}		
Working Peak Reverse Voltage		V_{RWM}		
Average Rectified Forward Current (Rated V_R) $T_C=142^\circ\text{C}$	Per Leg	I_O	5	A
	Total		10	A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20 kHz) $T_C=142^\circ\text{C}$		I_{FRM}	10	A
Non-Repetitive Peak Surge Current (Surge Applied At Rated Load Conditions Half Wave, Single Phase, 60Hz)		I_{FSM}	100	A
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/ μs
Operating Junction Temperature (Note 2)		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ 150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The heat generated must be less than the thermal conductivity from Junction-to-Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

■ THERMAL CHARACTERISTICS (PER LEG)




PARAMETER		SYMBOL	RATINGS	UNIT
Typical Thermal Resistance	TO-220	θ_{JC}	2	$^\circ\text{C}/\text{W}$
	TO-220F/TO-220F1		4	$^\circ\text{C}/\text{W}$
	TO-220F2			
	TO-263		3	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage Drop	V_F	$I_F=5.0\text{A}$, $T_C=25^\circ\text{C}$			0.92	V
		$I_F=5.0\text{A}$, $T_C=125^\circ\text{C}$			0.82	
Instantaneous Reverse Current	I_R	Rated DC Voltage, $T_C=25^\circ\text{C}$			0.1	mA
		Rated DC Voltage, $T_C=125^\circ\text{C}$			15.0	

Notes: Pulse Test: Pulse Width=300 μs , Duty Cycle \leq 2.0%.

■ TYPICAL CHARACTERISTICS

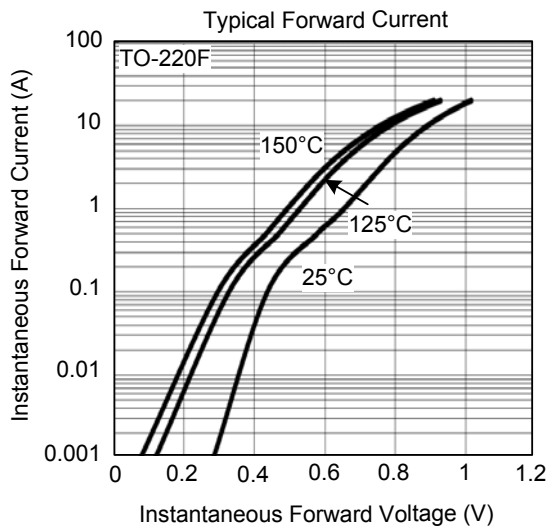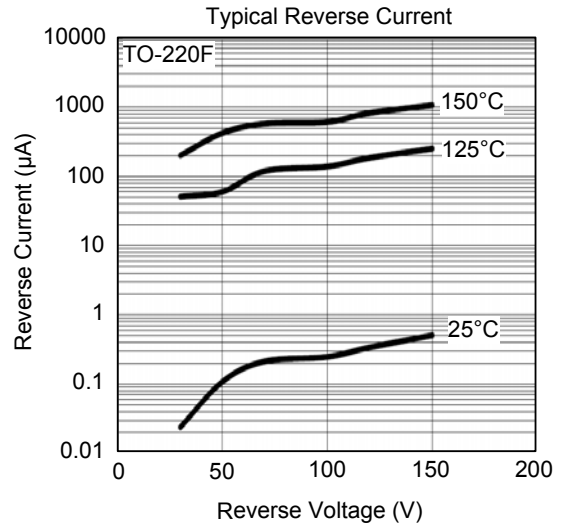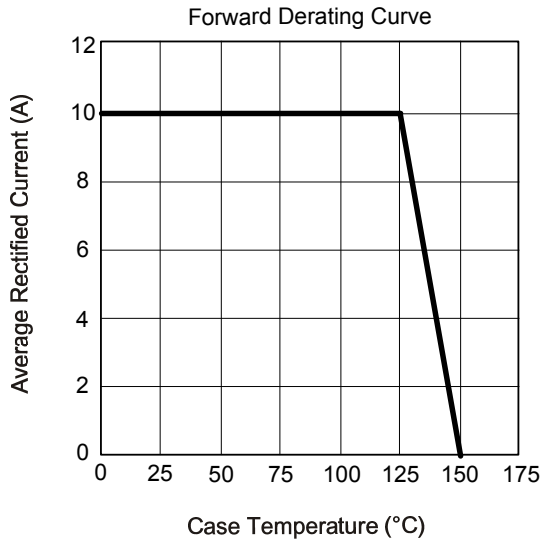

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.