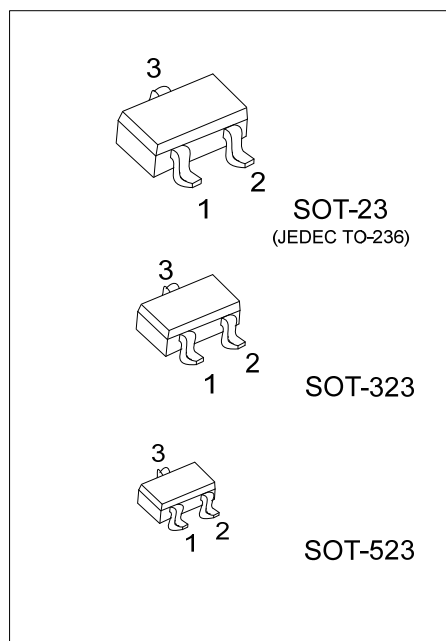


**BC846-BC850****NPN SILICON TRANSISTOR****SWITCHING AND AMPLIFIER APPLICATION****■ FEATURES**

- * Suitable for automatic insertion in thick and thin-film circuits.
- * Complement to BC856 ... BC860

**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
BC846L-x-AE3-R	BC846G-x-AE3-R	SOT-23	B	E	C	Tape Reel
BC847L-x-AE3-R	BC847G-x-AE3-R	SOT-23	B	E	C	Tape Reel
BC848L-x-AE3-R	BC848G-x-AE3-R	SOT-23	B	E	C	Tape Reel
BC849L-x-AE3-R	BC849G-x-AE3-R	SOT-23	B	E	C	Tape Reel
BC850L-x-AE3-R	BC850G-x-AE3-R	SOT-23	B	E	C	Tape Reel
BC846L-x-AL3-R	BC846G-x-AL3-R	SOT-323	B	E	C	Tape Reel
BC847L-x-AL3-R	BC847G-x-AL3-R	SOT-323	B	E	C	Tape Reel
BC848L-x-AL3-R	BC848G-x-AL3-R	SOT-323	B	E	C	Tape Reel
BC849L-x-AL3-R	BC849G-x-AL3-R	SOT-323	B	E	C	Tape Reel
BC850L-x-AL3-R	BC850G-x-AL3-R	SOT-323	B	E	C	Tape Reel
BC846L-x-AN3-R	BC846G-x-AN3-R	SOT-523	B	E	C	Tape Reel
BC847L-x-AN3-R	BC847G-x-AN3-R	SOT-523	B	E	C	Tape Reel
BC848L-x-AN3-R	BC848G-x-AN3-R	SOT-523	B	E	C	Tape Reel
BC849L-x-AN3-R	BC849G-x-AN3-R	SOT-523	B	E	C	Tape Reel
BC850L-x-AN3-R	BC850G-x-AN3-R	SOT-523	B	E	C	Tape Reel






Note: Pin Assignment: B: Base E: Emitter C: Collector

BC846G-x-AE3-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) AE3: SOT-23, AL3: SOT-323, AN3: SOT-523
	(3)Rank	(3) x: refer to Classification of h_{FE}
	(4)Green Package	(4) G: Halogen Free and Lead Free, L: Lead Free

BC846-BC850

NPN SILICON TRANSISTOR

■ MARKING

BC846	BC847	BC848	BC849	BC850
				

x: Rank Code, refer to Classification of h_{FE}
□: G: Halogen Free and Lead Free, L: Lead Free

BC846-BC850

NPN SILICON TRANSISTOR

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	VALUE	UNIT
Collector-Base Voltage	BC846	V _{CBO}	80	V
	BC847 / BC850		50	V
	BC848 / BC849		30	V
Collector-Emitter Voltage	BC846	V _{CEO}	65	V
	BC847 / BC850		45	V
	BC848 / BC849		30	V
Emitter-Base Voltage	BC846 / BC847	V _{EBO}	6	V
	BC848 / BC849 / BC850		5	V
Collector Current (DC)	Continuous	I _C	100	mA
	Peak (1)	I _{CM}	300	mA
Collector Dissipation	SOT-23	P _D	310	mW
	SOT-323		200	mW
	SOT-523		150	mW
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.







■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV _{CBO}	I _C =10μA, I _E =0	50			V
Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =2mA, I _B =0	45			V
Emitter-Base Breakdown Voltage	BV _{EBO}	I _E =10μA, I _C =0	6			V
Collector Cut-Off Current	I _{CBO}	V _{CB} =30V, I _E =0			15	nA
Collector Cutoff Current	I _{CEO}	V _{CE} =40V			100	nA
Emitter Cutoff Current	I _{EBO}	V _{EB} =5V			100	nA
DC Current Gain	h _{FE}	V _{CE} =5.0V, I _C =2.0mA	110		800	
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _C =10mA, I _B =0.5mA		90	200	mV
		I _C =100mA, I _B =5.0mA		200	400	mV
Collector-Base Saturation Voltage	V _{BE(SAT)}	I _C =10mA, I _B =0.5mA		700		mV
		I _C =100mA, I _B =5.0mA		900		mV
Base-Emitter On Voltage	V _{BE(ON)}	V _{CE} =5.0V, I _C =2.0mA	580	660	700	mV
		V _{CE} =5.0V, I _C =10mA			720	mV
Current Gain Bandwidth Product	f _T	V _{CE} =5.0V, I _C =10mA, f=100MHz		300		MHz
Output Capacitance	C _{OB}	V _{CB} =10V, I _E =0, f=1.0MHz		3.5	6	pF
Input Capacitance	C _{IB}	V _{EB} =0.5V, I _C =0, f=1.0MHz		9		pF
Noise Figure	NF	V _{CE} =5V, I _C =200μA, f=1KHz, R _G =2KΩ		2	10	dB
				1.2	4	dB
		V _{CE} =5V, I _C =200μA, R _G =2KΩ, f=30~15000Hz		1.4	4	dB
				1.4	3	dB

■ CLASSIFICATION OF h_{FE}

RANK	A	B	C
RANGE	110-220	200-450	420-800

■ TYPICAL CHARACTERISTICS

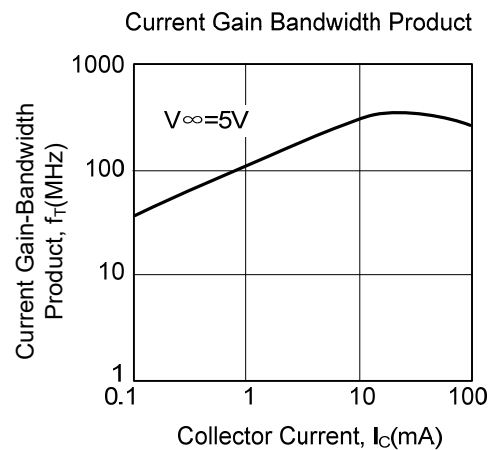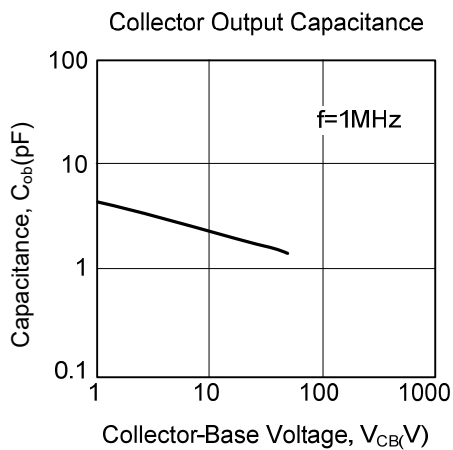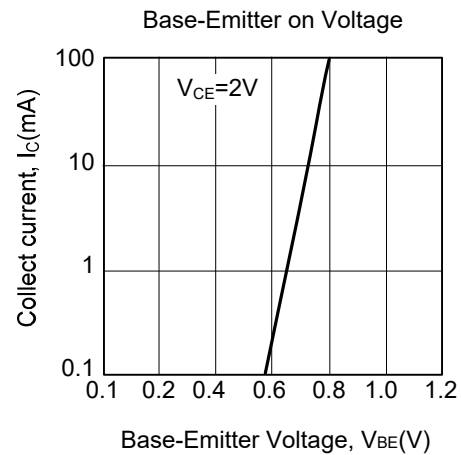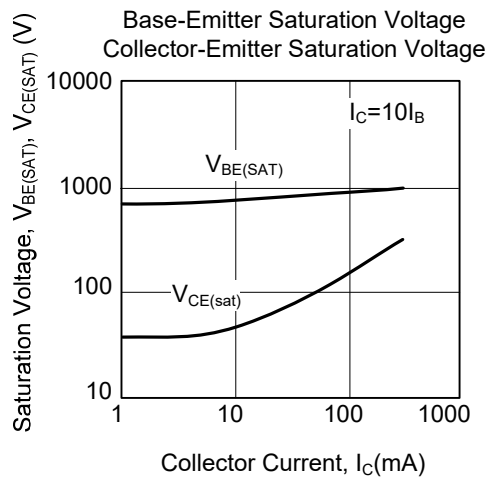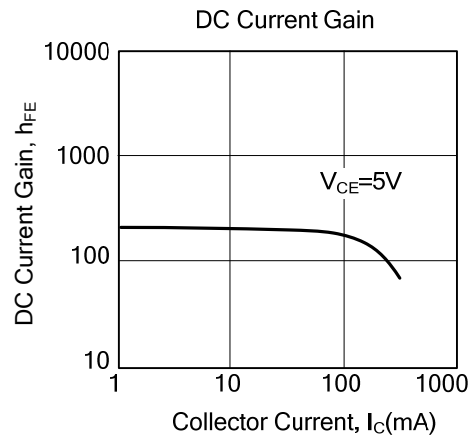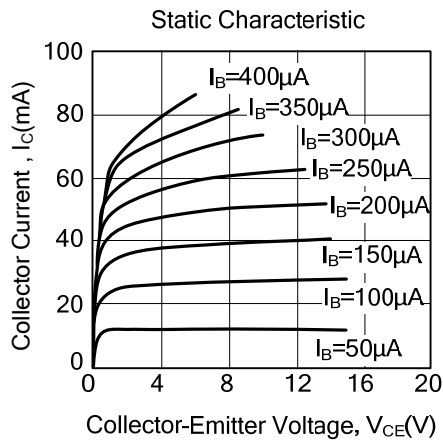

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.