



SB160

DIODE

1.0A SCHOTTKY BARRIER RECTIFIER

DESCRIPTION



The UTC **SB160** is a Schottky Rectifier with high current capacity and low forward voltage.

The UTC **SB160** is suitable for polarity protection ,low voltage and high frequency inverters and free wheeling applications.

FEATURES

- * High Current Capability
- * Low Forward Voltage

SYMBOL

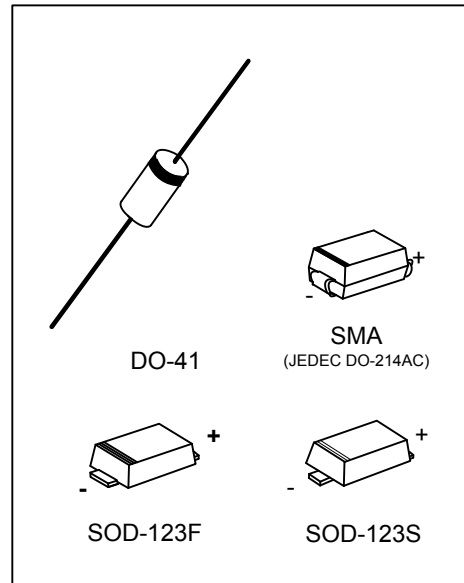

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SB160L-CA2S-R	SB160G-CA2S-R	SOD-123S	K	A	Tape Reel
SB160L-CA2F-R	SB160G-CA2F-R	SOD-123F	K	A	Tape Reel
SB160L-SMA-R	SB160G-SMA-R	SMA	K	A	Tape Reel
SB160L-Z41-R	SB160G-Z41-R	DO-41	K	A	Tape Reel
SB160L-Z41-B	SB160G-Z41-B	DO-41	K	A	Tape Box

Note: Pin Assignment: A: Anode K: Cathode

<p>SB160G-CA2S-R</p>	<p>(1) R: Tape Reel, B: Tape Box (2) CA2S: SOD-123S, CA2F: SOD-123F, SMA: SMA Z41: DO-41 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
----------------------	---

MARKING

Package	MARKING
SOD-123S SOD-123F	
SMA	
DO-41	

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Working Peak Reverse Voltage	V_{RWM}	60	V
DC Blocking Voltage	V_R	60	V
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	40	A
Average Rectified Output Current	I_O	1.0	A
Peak Reverse Current at Rated DC Blocking Voltage	$T_A=25^\circ\text{C}$	I_{RM}	0.5
	$T_A=100^\circ\text{C}$		5.0
Operating Temperature	T_J	-65 ~ +150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Typical Thermal Resistance	θ_{JL}	25 (Note)	$^\circ\text{C}/\text{W}$
		20 (Note)	$^\circ\text{C}/\text{W}$
	θ_{JC}	22	$^\circ\text{C}/\text{W}$

Note: FR-4 PCB, 2 oz Copper. Minimum recommended pad layout.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R=0.50\text{mA}$	60			V
Forward Voltage Drop	V_{FM}	$I_F=1.0\text{A}$			0.7	V
Peak Reverse Current at Rated DC Blocking Voltage	I_{RM}	$T_A=25^\circ\text{C}$			500	μA
		$T_A=100^\circ\text{C}$			5.0	mA

Note: Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.