



L1127/A/E

Preliminary

CMOS IC

ULTRA-LOW-NOISE, HIGH-SPEED, LOW-DROPOUT, 300mA LINEAR REGULATOR

DESCRIPTION


As a low dropout linear regulator, the UTC **L1127/A/E** only needs low input voltage (2.5~6V), and can deliver current to 300mA for setting the output voltage.

The UTC **L1127/A/E** is ideal for being used in such as battery-powered equipments notebook, personal computer and mother board. Its typical dropout voltage is 230mV at loading current 300mA.

L1127/A/E has 1.0V, 1.2V, 1.5V, 1.8V, 2.5V, 3.0V, 3.3V, 4.2V, 4.75V, fixed voltage versions and 0.8V to 5.5V adjustable voltage versions.

ERROR Flag (L1127E): **ERROR** Flag goes low when the output voltage drops 10% below nominal value .

ADJ/SET (L1127A): Connect ADJ/SET to GND for Preset output; Connect an external resistive voltage-divider from OUT to GND to set the out voltage between 0.8V and 5.5V.

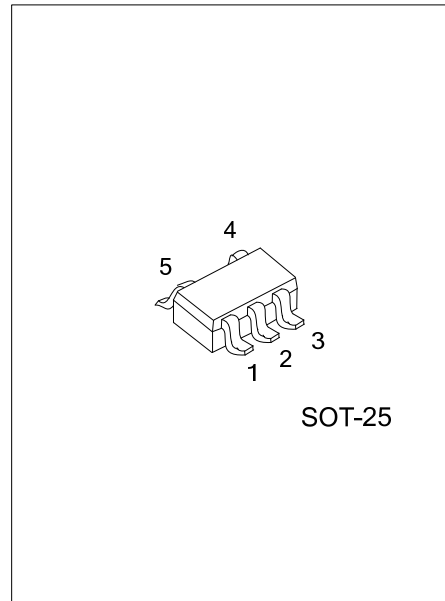

FEATURES

- * Operating Voltage: 2.5V~6V
- * Low Voltage Dropout
- * Output Current Guaranteed 300mA
- * For Setting Output Voltage Two Modes
 - Fixed mode : 1.0V, 1.2V, 1.5V, 1.8V, 2.5V, 3.0V, 3.3V, 4.2V, 4.75V
 - ADJ mode: Adjustable Output Voltage 0.8V~5.5V
- * **ERROR** Flag Indicates Output Status
- * Internal Current Limit Protection
- * Internal Soft-Start
- * Internal Thermal Protection
- * Work Stably with Low ESR Ceramics Capacitor

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
L1127L-xx-AF5-R	L1127G-xx-AF5-R	SOT-25	Tape Reel
L1127AL-xx-AF5-R	L1127AG-xx-AF5-R		
L1127EL-xx-AF5-R	L1127EG-xx-AF5-R		


Note: xx: Output Voltage, refer to Marking Information.

<p>L1127AG-xx-AF5-R</p>	<ul style="list-style-type: none"> (1)Packing Type (2)Package Type (3)Output Voltage Code (4)Green Package (5)Pin Situation 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) AF5: SOT-25 (3) xx: Refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free (4) refer to PIN CONFIGURATION
-------------------------	--	--

MARKING INFORMATION

PACKAGE	MARKING	VOLTAGE CODE
SOT-25 (L1127)	10:1.0V 12:1.2V 15:1.5V 18:1.8V 25:2.5V 30:3.0V 33:3.3V 42:4.2V 4H: 4.75V AD:ADJ	
SOT-25 (L1127A)		
SOT-25 (L1127E)		

PIN CONFIGURATION

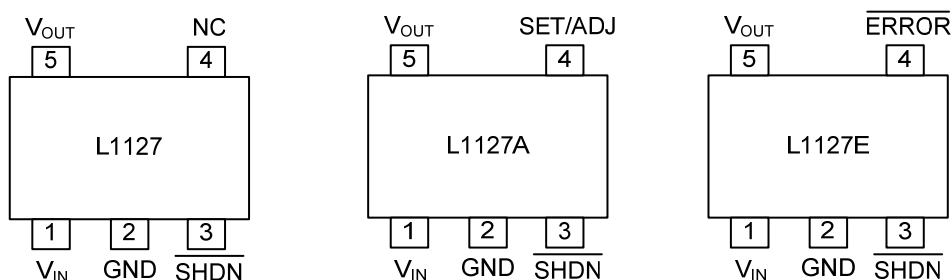


PIN DESCRIPTION


NO.	PIN NAME	I/O	DESCRIPTION
1	V_{IN}	I	Power supply
2	GND		Ground
3	SHDN	I	Active low shutdown input.
4	NC (L1127)	X	None connect
	SET/ADJ (L1127A)	I/O	Connect to an external resistor divider for Adj mode, Connect to GND for Preset V_{OUT} .
	ERROR (L1127E)	O	Opendrain output. Goes low when V_{OUT} drops 10% below nominal value.
5	OUT	O	Regulator output.

■ BLOCK DIAGRAM

For L1127

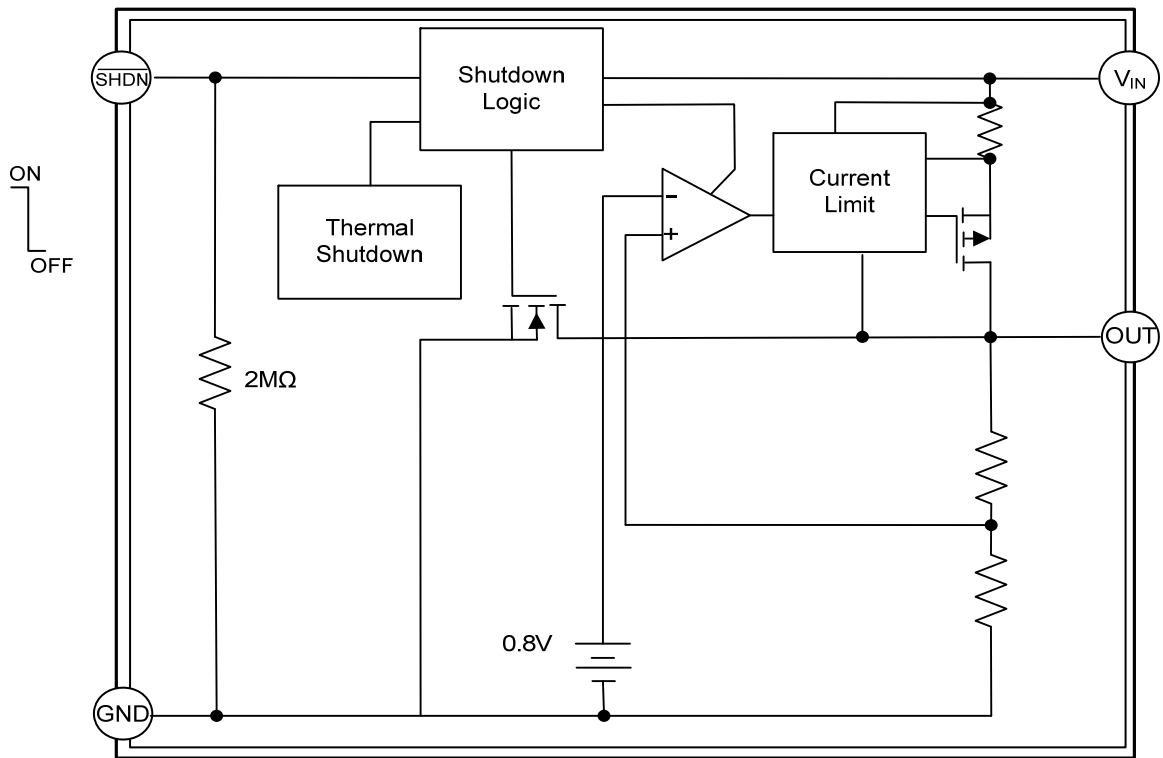


For L1127A

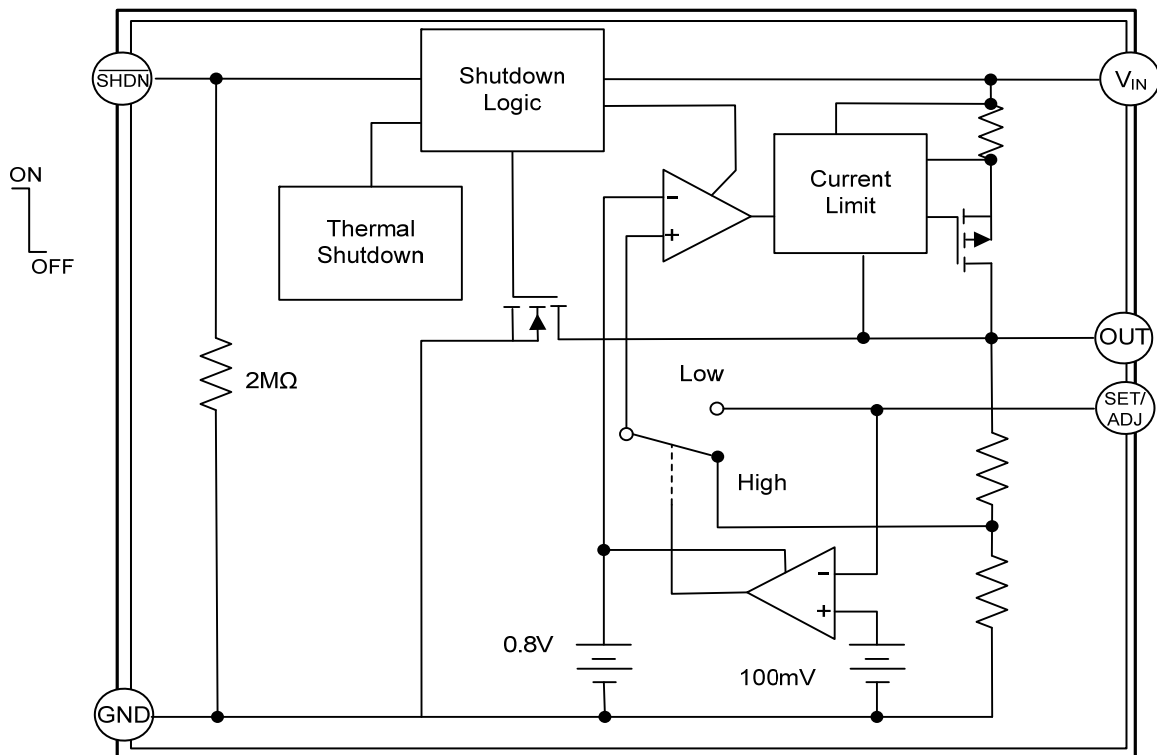

■ BLOCK DIAGRAM (Cont.)

For L1127E

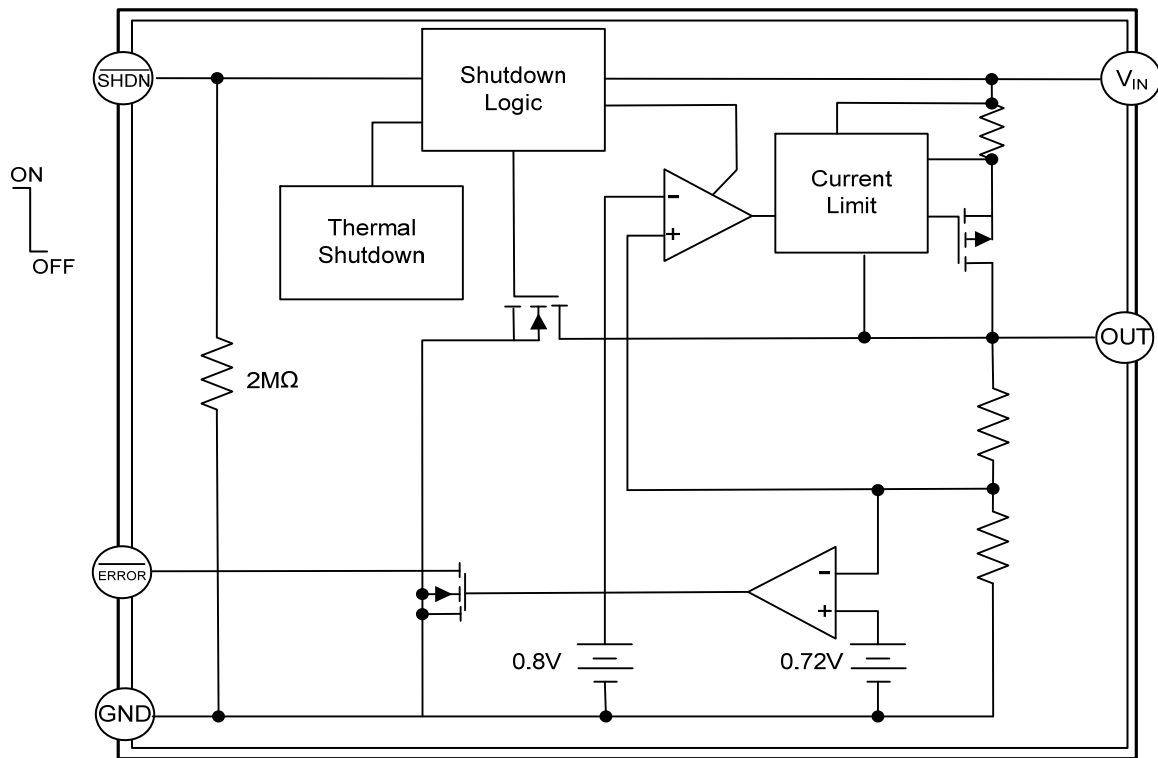

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
V_{IN} , \overline{SHDN} , \overline{ERROR} to GND		-0.3 ~ +6.5	V
ADJ/SET, OUT to GND		-0.3 ~ ($V_{IN}+0.3$)	V
Power Dissipation	P_D	400	mW
Junction Temperature	T_J	+125	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
V_{IN} Supply Voltage	V_{IN}	2.5 ~ 6	V
Output Voltage	V_{OUT}	0.8 ~ 5.5	V
V_{OUT} Output Current	I_{OUT}	0 ~ 300	mA
Operating Temperature	T_{OPR}	-40 ~ +85	°C


■ ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{OUT}+1V$ (min $V_{IN}=2.5V$), $I_{OUT}=0\sim 300mA$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = 25^\circ C$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	V_{IN}		2.5		6	V
Output Voltage Accuracy(Preset)	V_{OUT}	$I_{OUT}=1mA\sim 300mA$	-2		+2	%
Maximum Output Current	$I_{OUT\ MAX}$		300			mA
Quiescent Current	I_{GND}	Normal operate, $I_{OUT} = 10mA$		120	200	μA
		Shutdown mode.		0.1	5	
Line Regulation	REG_{LINE}	$V_{OUT}+0.5V \leq V_{IN} \leq 6V$, $I_{OUT} = 10mA$			0.1	%/V
Load Regulation	REG_{LOAD}	$V_{IN} = V_{OUT}+0.5V$, $1mA \leq I_{OUT} \leq 300mA$			0.6	%/A
Dropout Voltage	V_D	$V_{OUT} = 2.5V$, $I_{OUT} = 300mA$		230	360	mV
Soft-Start Time	T_{SS}			50		μs
Thermal Shutdown Temperature	T_{SHDN}			165		°C
Thermal Shutdown Hysteresis	DT_{SHDN}			30		°C
SHUTDOWN INPUT						
Shutdown Threshold	V_{IH}		1.8			V
	V_{IL}				0.4	V
\overline{SHDN} Pull Down Resistance	R_{SHDN}			2		M Ω
ADJ/SET Mode(L1127A)						
ADJ Voltage	V_{ADJ}	$I_{OUT}=1mA\sim 300mA$	0.784	0.8	0.816	V
SET Input Threshold for ADJ/Preset				100		mV
ERROR FLAG COMPARATOR (L1127E)						
Threshold ($V_{OUT}/nominal V_{OUT}$)	V_{THE}			90		%
Output Voltage	V_{OLE}	Sinking 100 μA		0.04	0.1	V
Output High Leakage		$V_{ERROR} = 6V$			1	μA

■ TYPICAL APPLICATION CIRCUITS


L1127

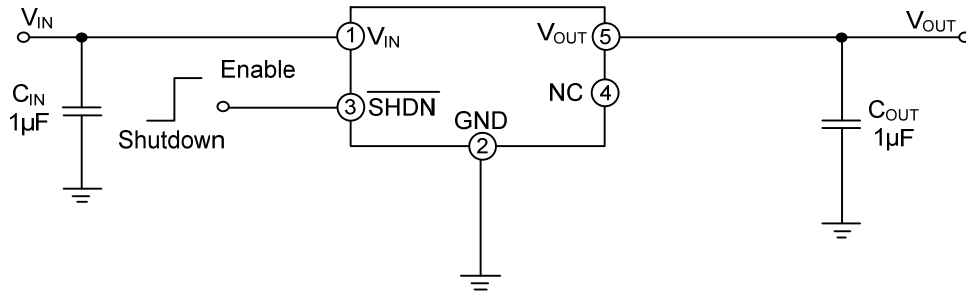


L1127A (For Preset Mode)

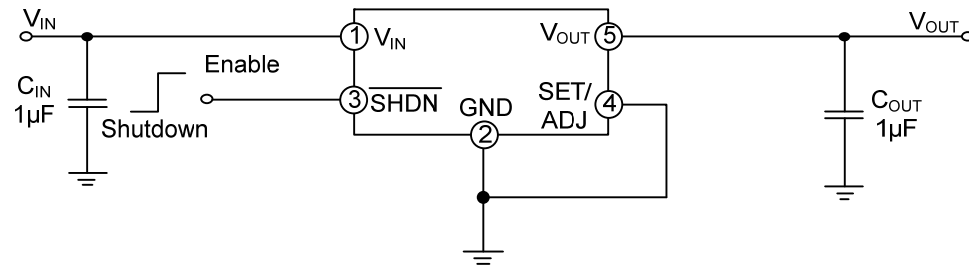

L1127A (For ADJ Mode)

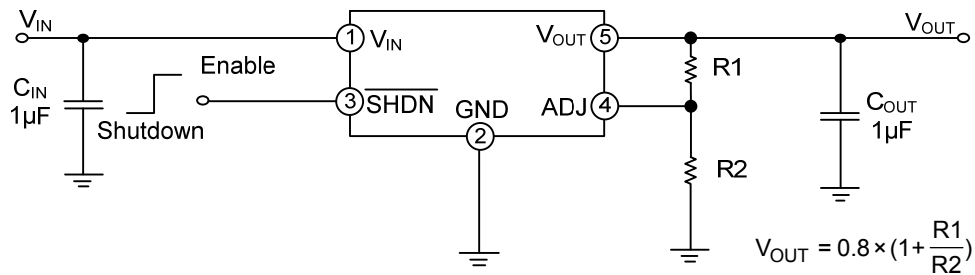

L1127E

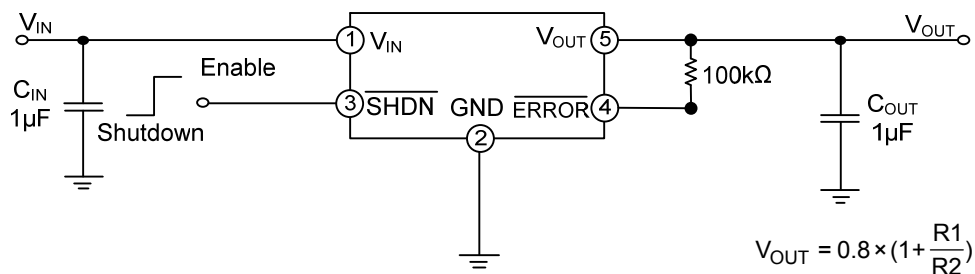

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.