



UR6225

CMOS IC

POSITIVE VOLTAGE REGULATOR

DESCRIPTION

The UTC **UR6225** is a positive voltage output, three-pin regulator that provides a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The UTC **UR6225** consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient responses to load variations have improved in comparison to the existing series.

FEATURES

- * Maximum Output Current: 300mA (Within Max. Power Dissipation, $V_{OUT} = 5.0V$)
- * Output Voltage Range: 1.5V ~ 6.0V in 0.1V Increments (1.5V ~ 1.9V for Custom Products)
- * Highly Accurate: Output Voltage $\pm 2\%$ ($\pm 1\%$ for Semi-Custom Products)
- * Low Power Consumption: Typ. 2.0 μA @ $V_{OUT} = 5.0V$
- * Output Voltage Temperature Characteristics: Typ. $\pm 100ppm/^{\circ}C$
- * Input Stability : Typ. 0.2%/V
- * Small Input-Output Differential: $I_{OUT} = 100mA$ @ $V_{OUT} = 5.0V$ with a 0.12V Differential.


ORDERING INFORMATION

| Ordering Number | | Package | Pin Assignment | | | | | Packing |
|--------------------|--------------------|----------|----------------|---|---|---|---|-----------|
| Lead Free | Halogen Free | | 1 | 2 | 3 | 4 | 5 | |
| UR6225L-xx-AB3-C-R | UR6225G-xx-AB3-C-R | SOT-89 | G | I | O | - | - | Tape Reel |
| UR6225L-xx-AE2-5-R | UR6225G-xx-AE2-5-R | SOT-23-3 | O | G | I | - | - | Tape Reel |
| UR6225L-xx-AE3-3-R | UR6225G-xx-AE3-3-R | SOT-23 | G | O | I | - | - | Tape Reel |
| UR6225L-xx-AF5-C-R | UR6225G-xx-AF5-C-R | SOT-25 | I | G | N | N | O | Tape Reel |
| UR6225L-xx-AF5-F-R | UR6225G-xx-AF5-F-R | SOT-25 | G | I | O | N | N | Tape Reel |
| UR6225L-xx-T92-C-B | UR6225G-xx-T92-C-B | TO-92 | G | I | O | - | - | Tape Box |
| UR6225L-xx-T92-C-K | UR6225G-xx-T92-C-K | TO-92 | G | I | O | - | - | Bulk |
| UR6225L-xx-T92-B-B | UR6225G-xx-T92-B-B | TO-92 | O | G | I | - | - | Tape Box |
| UR6225L-xx-T92-B-K | UR6225G-xx-T92-B-K | TO-92 | O | G | I | - | - | Bulk |

Notes: Pin Assignment: I: V_{IN} O: V_{OUT} G: V_{SS} N: No Connection

xx: Output Voltage, refer to Marking Information.


| | |
|--|---|
| | <p>(1) R:Tape Reel, K:Bulk, B:Tape Box</p> <p>(2) refer to Pin Assignment</p> <p>(3) AB3:SOT-89, AE2: SOT-23-3, AE3:SOT-23, AF5:SOT-25, T92:TO-92</p> <p>(4) xx:refer to Marking Information</p> <p>(5) G: Halogen Free and Lead Free, L: Lead Free</p> |
|--|---|

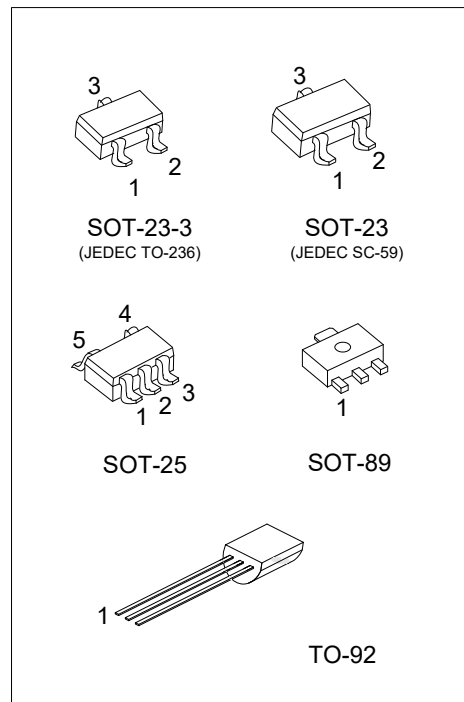

MARKING INFORMATION

| PACKAGE | VOLTAGE CODE | MARKING |
|----------|---|---|
| SOT-89 | | <p>Date Code ← [] [] [] [] → Voltage Code UR6225 L: Lead Free G: Halogen Free</p> |
| SOT-25 | 15:1.5V 18:1.8V 20:2.0V 21:2.1V 25:2.5V 26:2.6V 27:2.7V | <p>Voltage Code ← [] [] → Pin Code F2XX L: Lead Free G: Halogen Free</p> |
| SOT-23-3 | 28:2.8V 2J:2.85V 30:3.0V 31:3.1V 33:3.3V | <p>Voltage Code ← [] [] → Pin Code F2XX L: Lead Free G: Halogen Free</p> |
| SOT-23 | 35:3.5V 36:3.6V 38:3.8V 40:4.0V 45:4.5V | <p>Voltage Code ← [] [] → Pin Code F2XX L: Lead Free G: Halogen Free</p> |
| TO-92 | 50:5.0V 60:6.0V | <p>UTC UR6225 Pin Code ← [] [] → Date Code L: Lead Free G: Halogen Free</p> |

BLOCK DIAGRAM

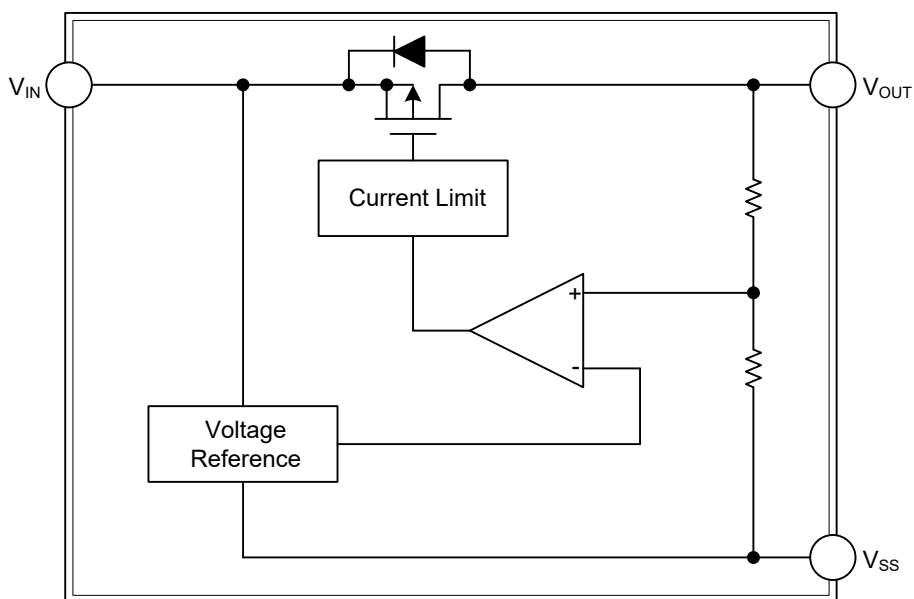

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|-----------------------|----------------|------------------|---|------|
| Input Voltage | | V _{IN} | 10 | V |
| Output Current | | I _{OUT} | 300 | mA |
| Output Voltage | | V _{OUT} | V _{SS} -0.3 ~ V _{IN} +0.3 | V |
| Power Dissipation | SC-23-3/SOT-23 | P _D | 350 | mW |
| | SOT-25 | | 500 | mW |
| | SOT-89 | | 625 | mW |
| | TO-92 | | | |
| Junction Temperature | | T _J | +125 | °C |
| Operating Temperature | | T _{OPR} | -40 ~ +85 | °C |
| Storage Temperature | | T _{STG} | -40~+125 | °C |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

UR6225-6.0V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-------|-------|--------|
| Output Voltage | 1 | V _{OUT(E)} (Note2) | I _{OUT} =40mA, V _{IN} =7.0V | 5.880 | 6.000 | 6.120 | V |
| Maximum Output Current | 1 | I _{OUT(MAX)} | V _{IN} =7.0V, V _{OUT(E)} ≥5.4V | 250 | | | mA |
| Minimum Load Current | | I _{OUT(MIN)} | V _{IN} =V _{OUT} +1V | | | 50 | μA |
| Load Stability | 1 | ΔV _{OUT} | V _{IN} =7.0V, 1mA≤I _{OUT} ≤100mA | | 40 | 80 | mV |
| Input-Output Voltage Differential (Note3) | 1 | V _{DIF1} | I _{OUT} =100mA | | 120 | | mV |
| | 1 | V _{DIF2} | I _{OUT} =200mA | | 380 | | mV |
| Supply Current | 2 | I _{SS} | V _{IN} =7.0V | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | I _{OUT} =40mA 7.0V≤V _{IN} ≤10V | | 0.2 | 0.3 | %/V |
| Input Voltage | | V _{IN} | I _{OUT} =5mA | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | I _{OUT} =40mA -40°C≤T _{OPR} ≤85°C | | ±100 | | ppm/°C |

UR6225-5.0V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-------|-------|--------|
| Output Voltage | 1 | V _{OUT(E)} (Note2) | I _{OUT} =40mA, V _{IN} =6.0V | 4.900 | 5.000 | 5.100 | V |
| Maximum Output Current | 1 | I _{OUT(MAX)} | V _{IN} =6.0V, V _{OUT(E)} ≥4.5V | 250 | | | mA |
| Minimum Load Current | | I _{OUT(MIN)} | V _{IN} =V _{OUT} +1V | | | 50 | μA |
| Load Stability | 1 | ΔV _{OUT} | V _{IN} =6.0V, 1mA≤I _{OUT} ≤100mA | | 40 | 80 | mV |
| Input-Output Voltage Differential (Note3) | 1 | V _{DIF1} | I _{OUT} =100mA | | 120 | | mV |
| | 1 | V _{DIF2} | I _{OUT} =200mA | | 380 | | mV |
| Supply Current | 2 | I _{SS} | V _{IN} =6.0V | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | I _{OUT} =40mA 6.0V≤V _{IN} ≤10V | | 0.2 | 0.3 | %/V |
| Input Voltage | | V _{IN} | I _{OUT} =5mA | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | I _{OUT} =40mA -40°C≤T _{OPR} ≤85°C | | ±100 | | ppm/°C |

■ ELECTRICAL CHARACTERISTICS (Cont.)

UR6225-4.5V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=5.5V$ | 4.410 | 4.500 | 4.59 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=5.5V, V_{OUT(E)}\geq 4.05V$ | 200 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=5.5V, 1mA\leq I_{OUT}\leq 100mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=100mA$ | | 170 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=200mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=5.5V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $5.5V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-4.0V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=5.0V$ | 3.920 | 4.000 | 4.080 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=5.0V, V_{OUT(E)}\geq 3.6V$ | 200 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=5.0V, 1mA\leq I_{OUT}\leq 100mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=100mA$ | | 170 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=200mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=5.0V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $5.0V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-3.8V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.8V$ | 3.724 | 3.800 | 3.876 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.8V, V_{OUT(E)}\geq 3.42V$ | 165 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.8V, 1mA\leq I_{OUT}\leq 86mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=86mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=172mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.8V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.8V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

■ ELECTRICAL CHARACTERISTICS (Cont.)

UR6225-3.6V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.6V$ | 3.528 | 3.600 | 3.672 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.6V, V_{OUT(E)}\geq 3.24V$ | 165 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.6V, 1mA\leq I_{OUT}\leq 86mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=86mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=172mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.6V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.6V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-3.5V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.5V$ | 3.430 | 3.500 | 3.570 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.5V, V_{OUT(E)}\geq 3.15V$ | 165 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.5V, 1mA\leq I_{OUT}\leq 86mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=86mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=172mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.5V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.5V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-3.3V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.3V$ | 3.234 | 3.300 | 3.366 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.3V, V_{OUT(E)}\geq 2.97V$ | 165 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.3V, 1mA\leq I_{OUT}\leq 86mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=86mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=172mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.3V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.3V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

■ ELECTRICAL CHARACTERISTICS (Cont.)

UR6225-3.0V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.0V$ | 2.940 | 3.000 | 3.060 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.0V, V_{OUT(E)} \geq 2.7V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.0V, 1mA \leq I_{OUT} \leq 80mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=80mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=160mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.0V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.0V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-3.1V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=4.0V$ | 3.038 | 3.1 | 3.162 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=4.0V, V_{OUT(E)} \geq 2.7V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=4.0V, 1mA \leq I_{OUT} \leq 80mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=80mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=160mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=4.0V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $4.0V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-2.85V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.85V$ | 2.793 | 2.850 | 2.907 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.85V, V_{OUT(E)} \geq 2.565V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.85V, 1mA \leq I_{OUT} \leq 77mA$ | | 45 | 90 | mV |
| Input-Output Voltage Differential(Note3) | 1 | V_{DIF1} | $I_{OUT}=77mA$ | | 180 | | mV |
| | 1 | V_{DIF2} | $I_{OUT}=154mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.85V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.85V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

■ ELECTRICAL CHARACTERISTICS (Cont.)

UR6225-2.8V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.8V$ | 2.744 | 2.800 | 2.856 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.8V, V_{OUT(E)} \geq 2.52V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.8V, 1mA \leq I_{OUT} \leq 76mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=76mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=152mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.8V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.8V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

UR6225-2.7V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.7V$ | 2.646 | 2.700 | 2.754 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.7V, V_{OUT(E)} \geq 2.43V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.7V, 1mA \leq I_{OUT} \leq 76mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=76mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=152mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.7V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.7V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

UR6225-2.6V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.6V$ | 2.548 | 2.600 | 2.652 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.6V, V_{OUT(E)} \geq 2.34V$ | 150 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.6V, 1mA \leq I_{OUT} \leq 72mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=72mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=144mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.6V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.6V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

■ ELECTRICAL CHARACTERISTICS (Cont.)

UR6225-2.5V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|------|-----------|------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.5V$ | 2.45 | 2.500 | 2.55 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.5V, V_{OUT(E)} \geq 2.25V$ | 125 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.5V, 1mA \leq I_{OUT} \leq 70mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=70mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=140mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.5V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.5V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

UR6225-2.1V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.1V$ | 2.058 | 2.100 | 2.142 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.1V, V_{OUT(E)} \geq 1.89V$ | 125 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.1V, 1mA \leq I_{OUT} \leq 62mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=62mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=124mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.1V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.1V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

UR6225-2.0V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|-----------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=3.0V$ | 1.960 | 2.000 | 2.040 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=3.0V, V_{OUT(E)} \geq 1.8V$ | 100 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=3.0V, 1mA \leq I_{OUT} \leq 60mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=60mA$ | | 180 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=120mA$ | | 400 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=3.0V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $3.0V \leq V_{IN} \leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C \leq T_{OPR} \leq 85^{\circ}C$ | | ± 100 | | ppm/ C |

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-1.8V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA, V_{IN}=2.8V$ | 1.764 | 1.800 | 1.836 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=2.8V, V_{OUT(E)}\geq 1.62V$ | 100 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=2.8V, 1mA\leq I_{OUT}\leq 60mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=56mA$ | | 400 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=112mA$ | | 600 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=2.8V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $2.8V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

UR6225-1.5V (Note1)

| PARAMETER | CIRCUIT | SYMBOL | TEST CONDITONS | MIN | TYP | MAX | UNIT |
|--|---------|--|--|-------|-----------|-------|------------------|
| Output Voltage | 1 | $V_{OUT(E)}$ (Note2) | $I_{OUT}=40mA$ | 1.470 | 1.500 | 1.530 | V |
| Maximum Output Current | 1 | $I_{OUT(MAX)}$ | $V_{IN}=2.5V, V_{OUT(E)}\geq 1.35V$ | 100 | | | mA |
| Minimum Load Current | | $I_{OUT(MIN)}$ | $V_{IN}=V_{OUT}+1V$ | | | 50 | μA |
| Load Stability | 1 | ΔV_{OUT} | $V_{IN}=2.5V, 1mA\leq I_{OUT}\leq 60mA$ | | 45 | 90 | mV |
| Input-Output Voltage | 1 | V_{DIF1} | $I_{OUT}=56mA$ | | 400 | | mV |
| Differential(Note3) | 1 | V_{DIF2} | $I_{OUT}=112mA$ | | 600 | | mV |
| Supply Current | 2 | I_{SS} | $V_{IN}=2.5V$ | | 2.0 | 4.5 | μA |
| Input Stability | 1 | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $I_{OUT}=40mA$ $2.5V\leq V_{IN}\leq 10V$ | | 0.2 | 0.3 | %/V |
| Input Voltage | | V_{IN} | $I_{OUT}=5mA$ | | | 10 | V |
| Output Voltage Temperature Characteristics | 1 | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \times V_{OUT}}$ | $I_{OUT}=40mA$ $-40^{\circ}C\leq T_{OPR}\leq 85^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

Notes: 1. $V_{OUT(T)}$ =Specified Output Voltage.


2. $V_{OUT(E)}$ =Effective Output Voltage (i.e. the output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

3. $V_{DIF} = \{V_{IN1}^{(Note4)} - V_{OUT(E)}\}$


4. V_{IN1} = The input voltage at the time 98% of $V_{OUT(E)}$ is output (input voltage has been gradually reduced).

■ TEST CIRCUITS


Circuit 1

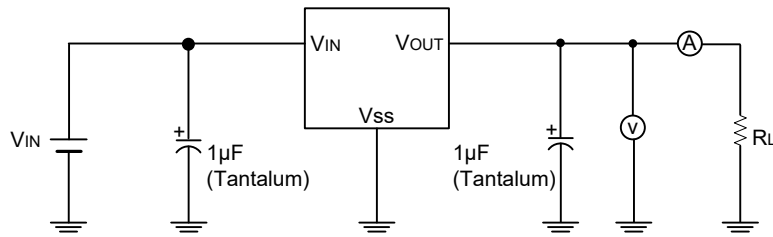

Circuit 2




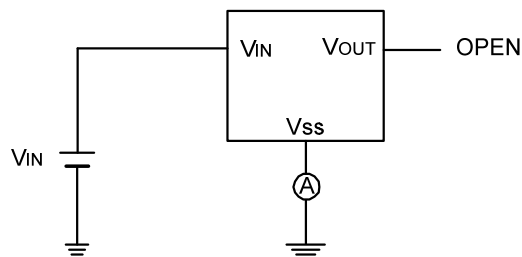


■ TYPICAL APPLICATION CIRCUIT


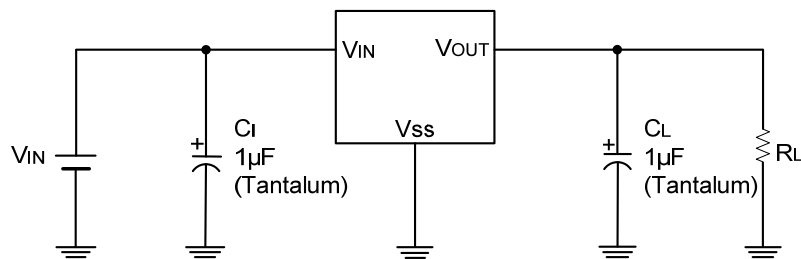


■ TYPICAL CHARACTERISTIC







(1) OUTPUT VOLTAGE VS. OUTPUT CURRENT

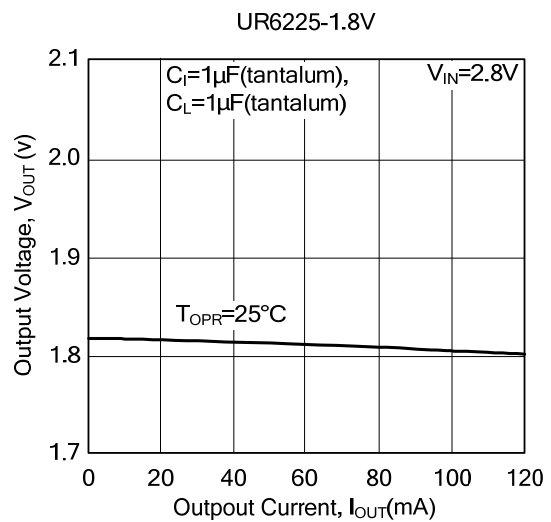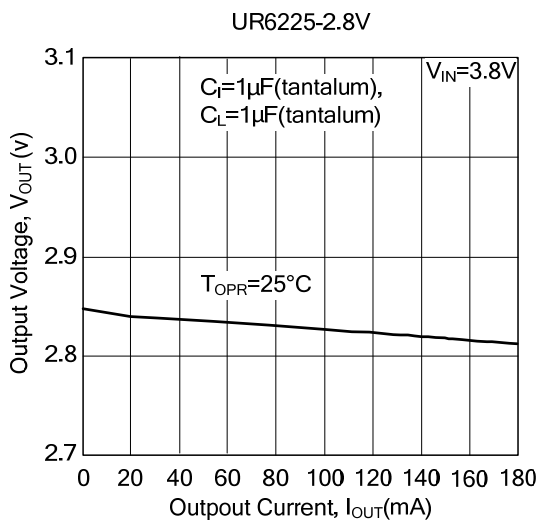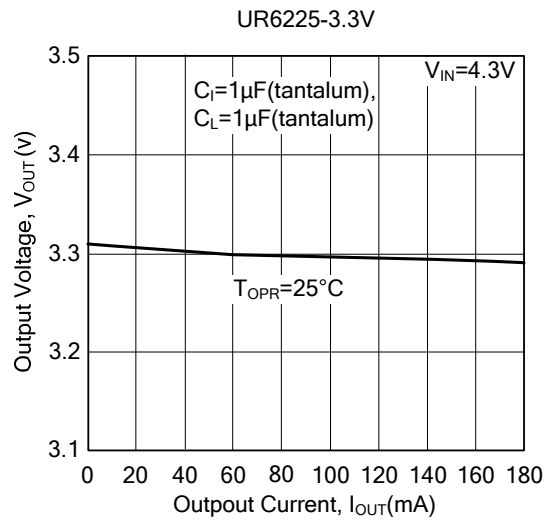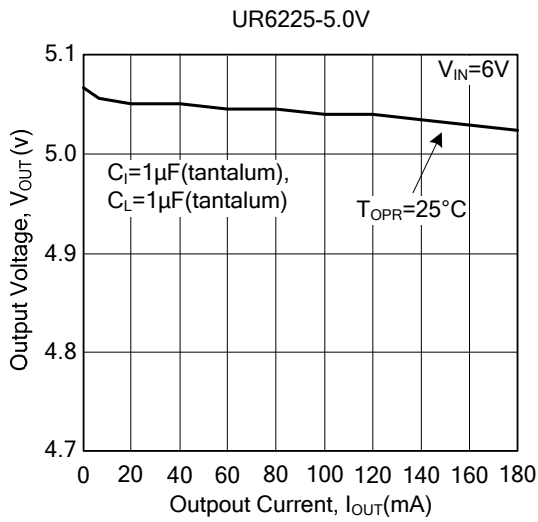

(2) OUTPUT VOLTAGE VS. INPUT VOLTAGE



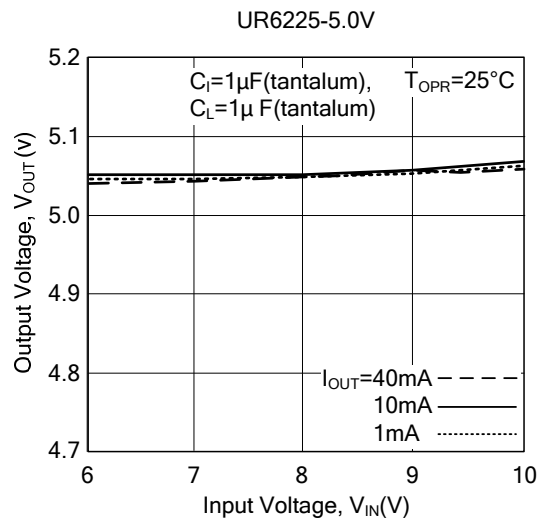
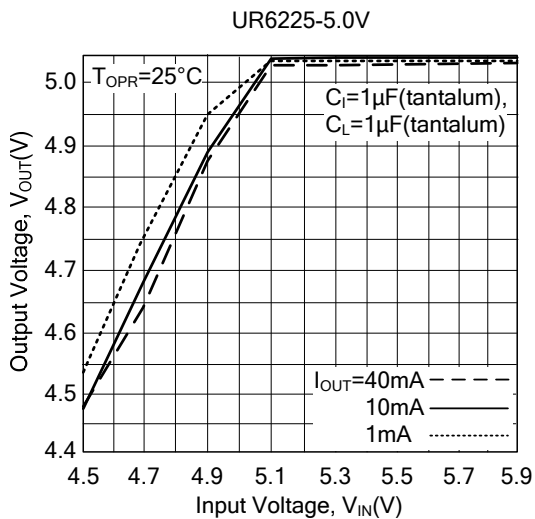


■ TYPICAL CHARACTERISTIC (Cont.)

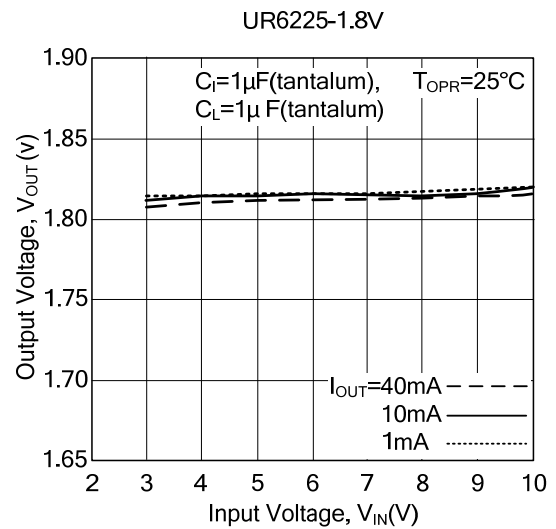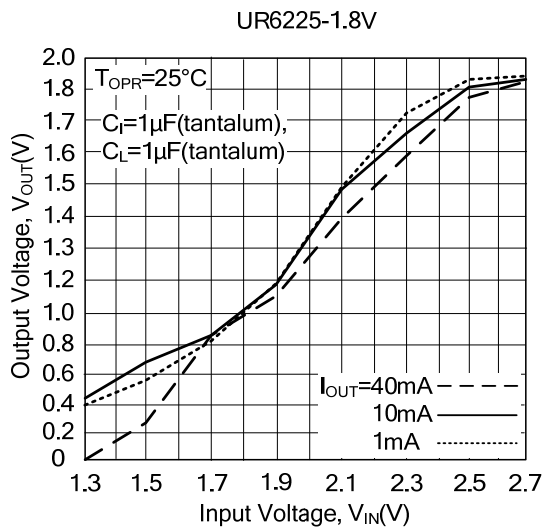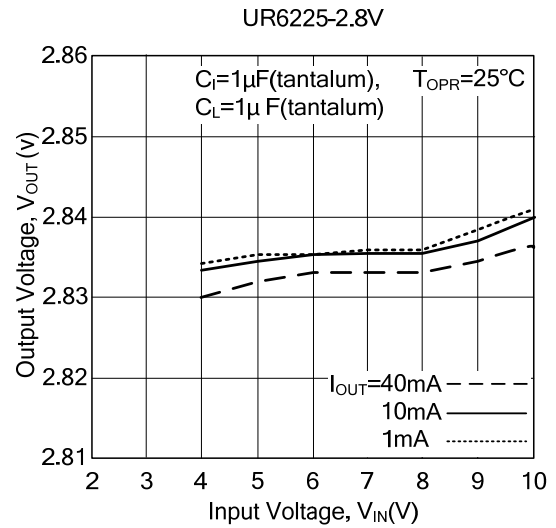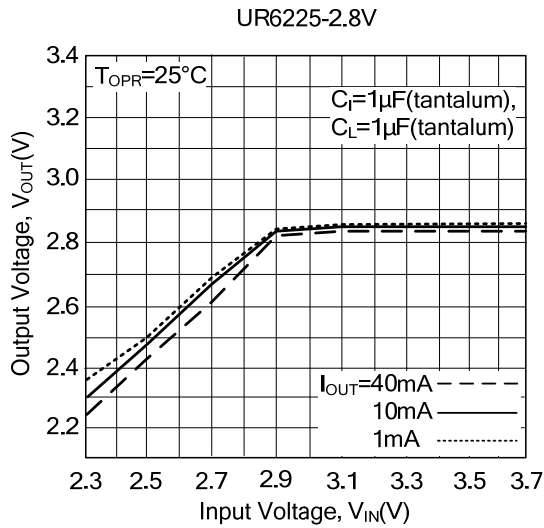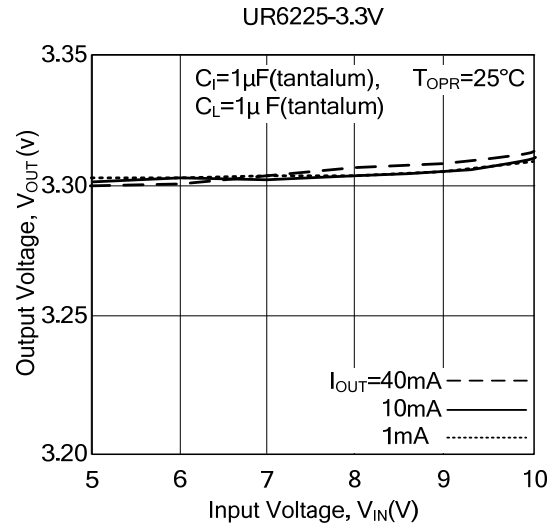
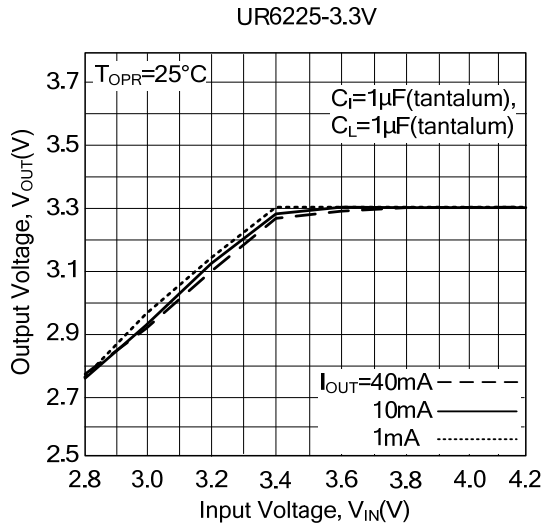


■ TYPICAL CHARACTERISTIC (Cont.)







(3) INPUT/OUTPUT VOLTAGE DIFFERENTIAL VS. OUTPUT CURRENT

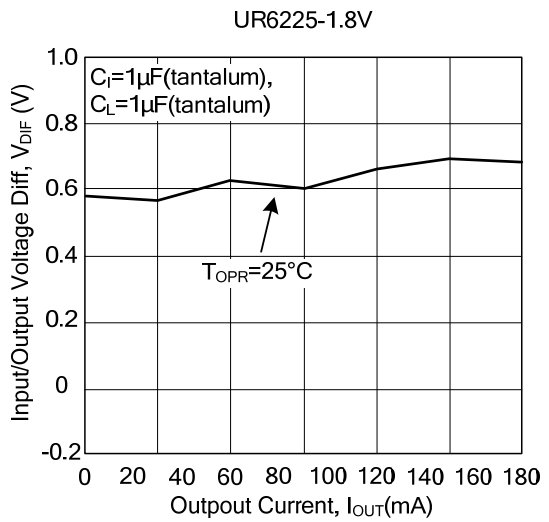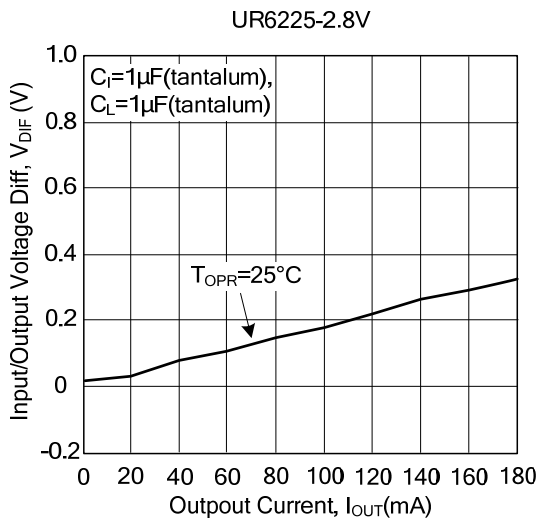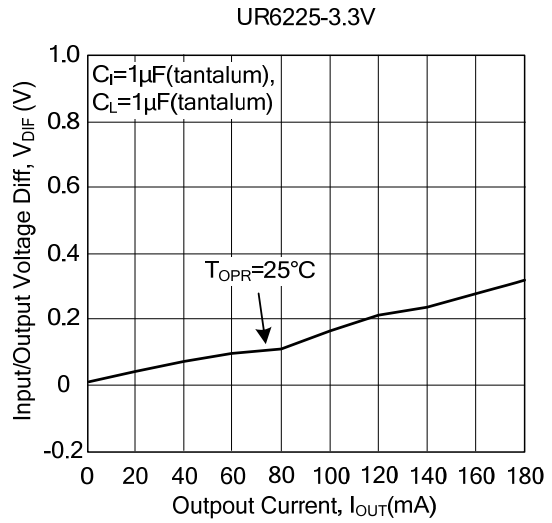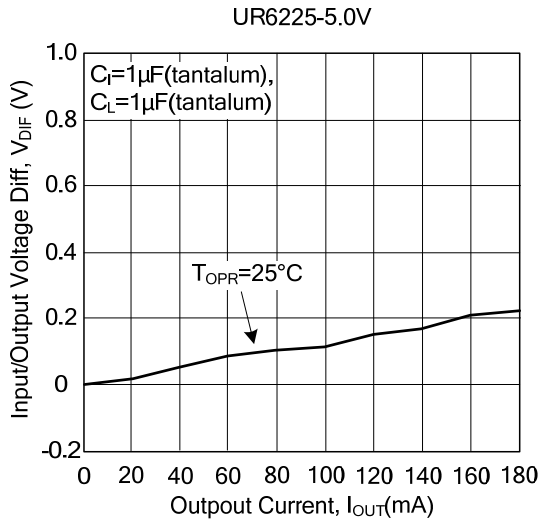

(4) SUPPLY CURRENT VS. INPUT VOLTAGE



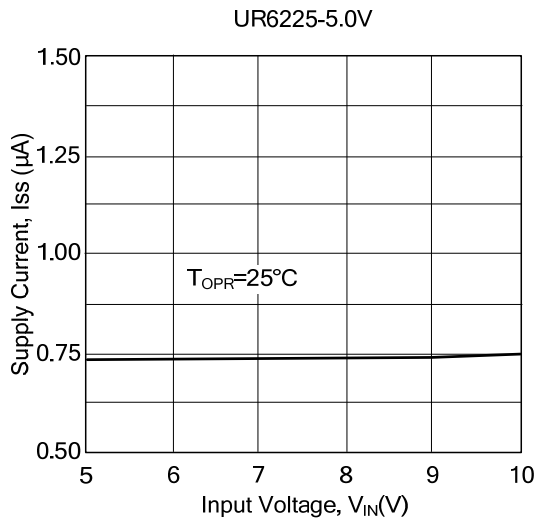
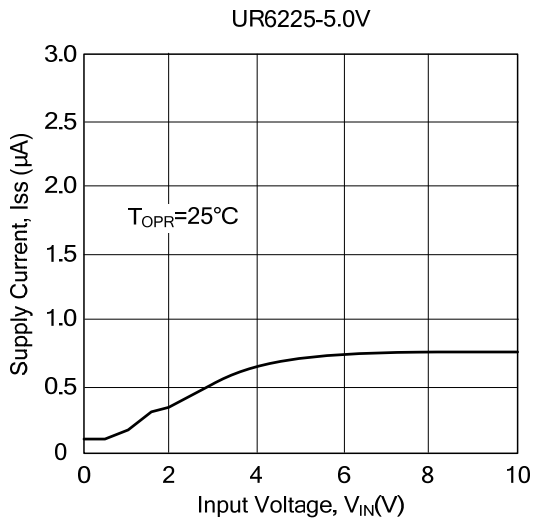


■ TYPICAL CHARACTERISTIC (Cont.)

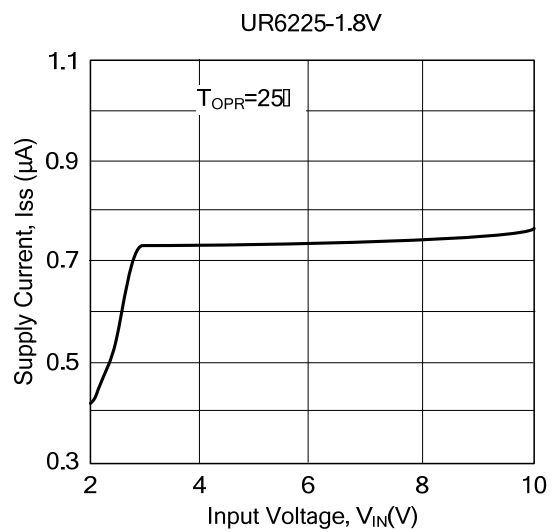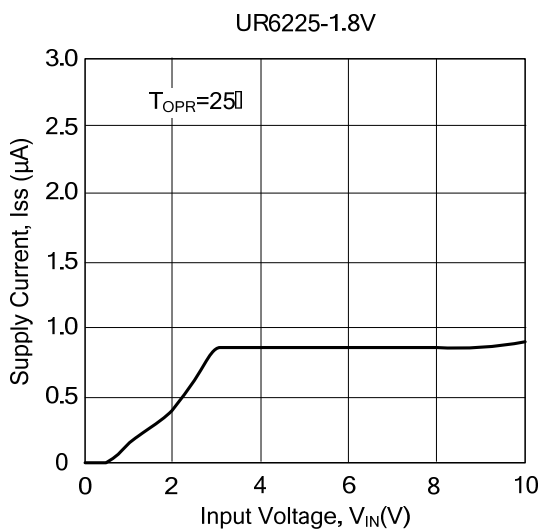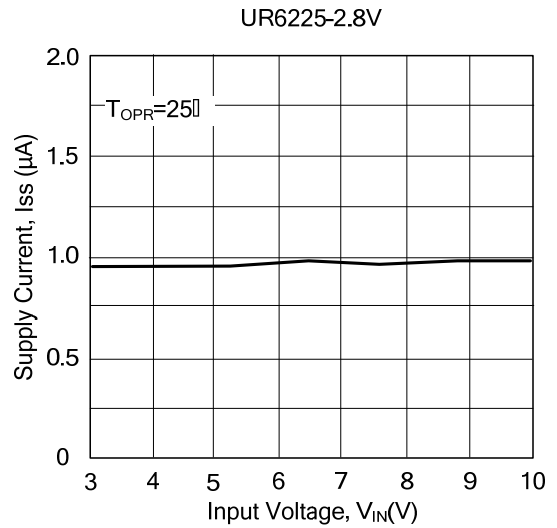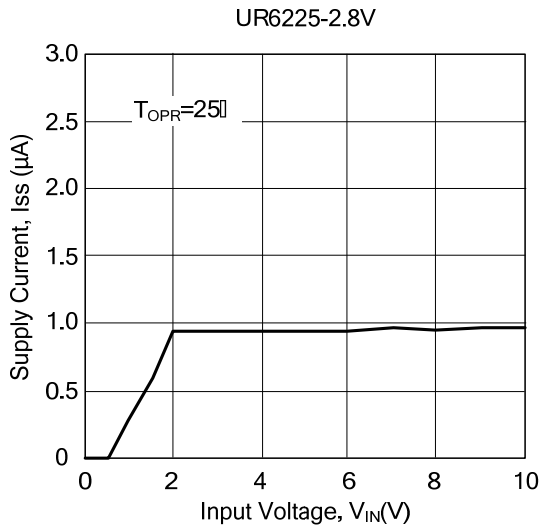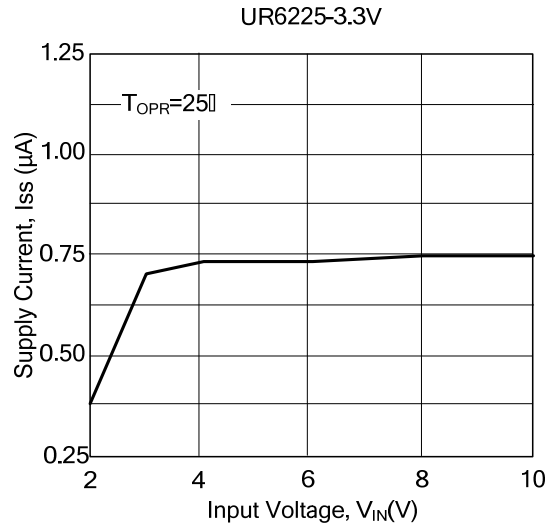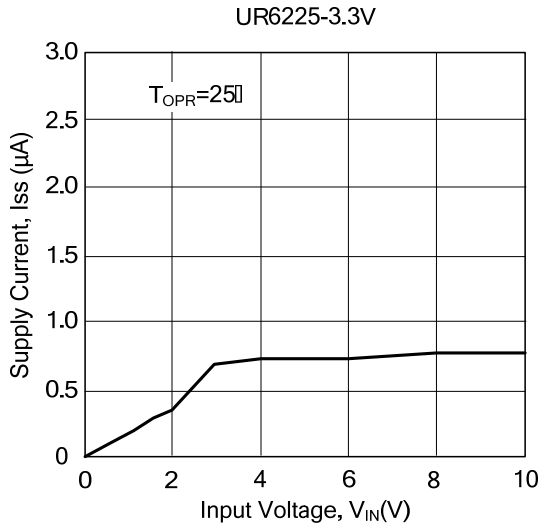

■ TYPICAL CHARACTERISTIC (Cont.)

(5) LOAD TRANSIENT RESPONSE

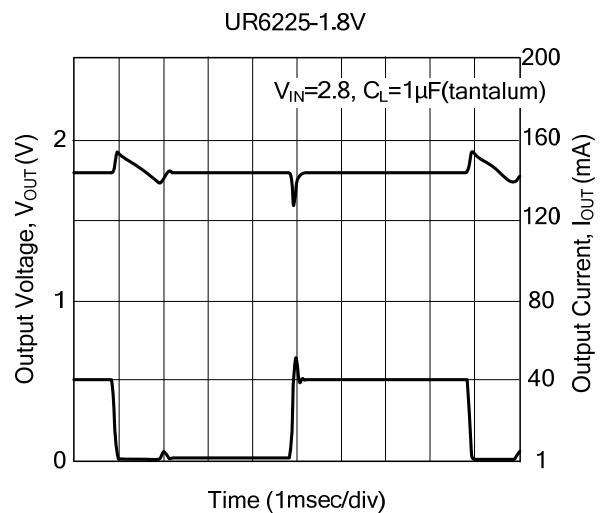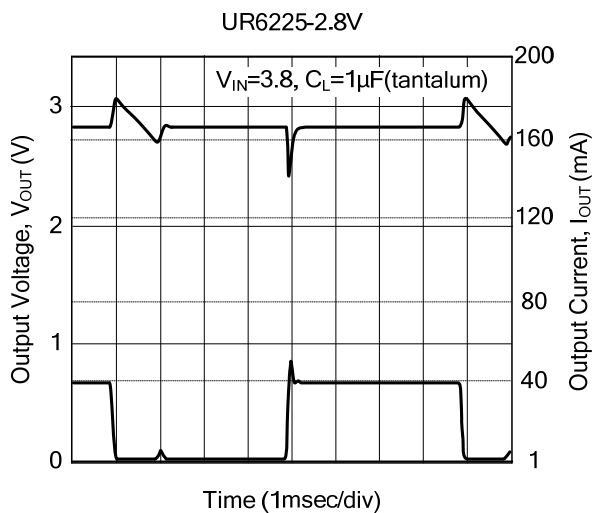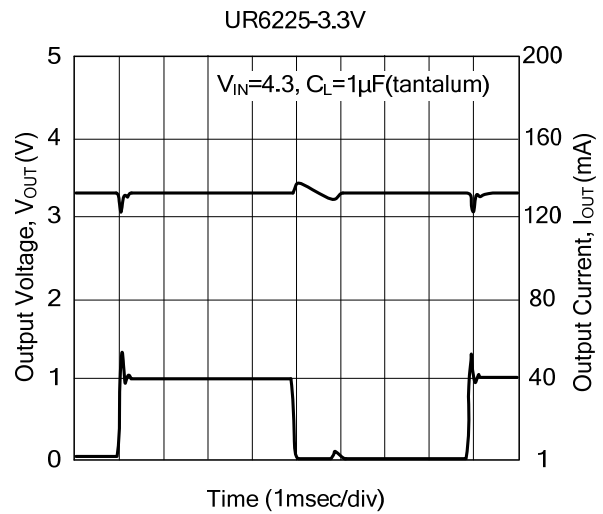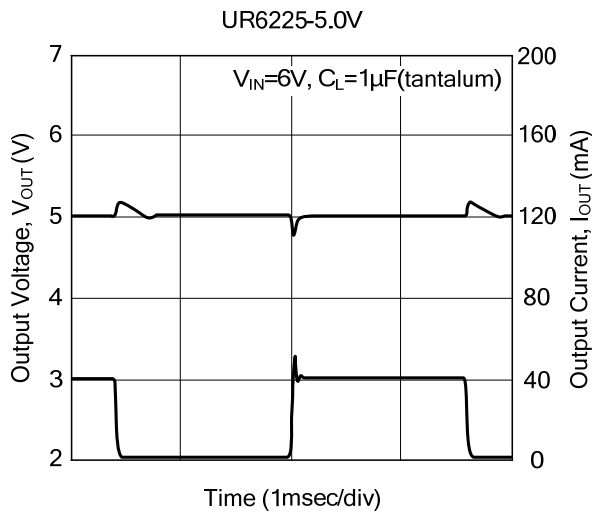

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.