



2SK545

Preliminary


JFET

IMPEDANCE CONVERTER APPLICATIONS

DESCRIPTION

The UTC **2SK545** is an N-channel Junction field effect transistor. It uses UTC's advanced technology to provide customers low C_{iss} and low I_{GSS} .

The UTC **2SK545** is suitable for infrared sensor and impedance converter applications.

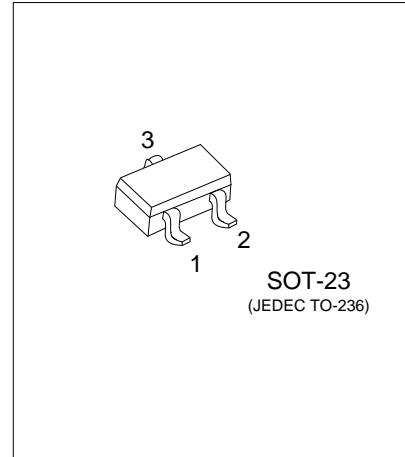

FEATURES

- * Low Input Capacitance
- * Low Gate-Source Leakage Current


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SK545L-xxx-AE3-R	2SK545G-xxx-AE3-R	SOT-23	S	D	G	Tape Reel

Note: Pin Assignment: S: Source D: Drain G: Gate

<p>2SK545G-xxx-AE3-R</p> <p>(1) Packing Type (2) Package Type (3) Rank (4) Green Package</p>	<p>(1) R: Tape Reel (2) AE3: SOT-23 (3) xx: refer to Classification of I_{DSS} (4) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

MARKING

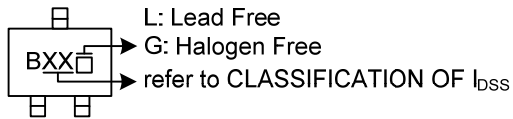

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	V_{DSS}	40	V
Gate-Drain Voltage	V_{GDS}	-40	V
Gate Current	I_G	10	mA
Drain Current	I_D	1	mA
Power Dissipation	P_D	125	mW
Junction Temperature	T_J	+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Gate-to-Drain Breakdown Voltage	$V_{(BR)GDS}$	$I_D=-10\mu\text{A}$, $V_{DS}=0\text{V}$	-40			V
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS}=-20\text{V}$, $V_{DS}=0\text{V}$			-500	pA
Zero-Gate Voltage Drain Current	I_{DSS}	$V_{DS}=10\text{V}$, $V_{GS}=0\text{V}$	30		300	μA
Cutoff Voltage	$V_{GS(OFF)}$	$V_{DS}=10\text{V}$, $I_D=1\mu\text{A}$		-1.5	-4.0	V
Forward Transfer Admittance	$ y_{fs} $	$V_{GS}=0\text{V}$, $V_{DS}=10\text{V}$, $f=1.0\text{KHz}$	0.05	0.13		mS
Input Capacitance	C_{ISS}	$V_{GS}=0\text{V}$, $V_{DS}=10\text{V}$, $f=1.0\text{MHz}$		1.7		pF
Reverse Transfer Capacitance	C_{RSS}			0.7		pF

■ CLASSIFICATION OF I_{DSS}

RANK	B10	B11	B12
RANGE	30~80	60~180	150~300

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.