PWM CONTROL 3A STEP-DOWN CONVERTER



HSOP-8

■ DESCRIPTION

The UTC **P4596** consists of 3A step-down switching regulator with PWM control which includes a reference voltage source, oscillation circuit, error amplifier, internal PMOS and etc.

The UTC **P4596** can provide low-ripple power, high efficiency, and excellent transient characteristics and an enable function, an over current protect function and a short circuit protect function are built inside, And the PWM control circuit can vary the duty ratio linearly from 100 down to 0%. This converter also includes an error amplifier circuit as well as a soft-start circuit that prevents overshoot at startup. These ICs can work as step-down switching regulators with the addition of an internal P-channel Power MOS, a coil and a diode connected externally. They provide such outstanding features: low current consumption. It is also suitable for the operation via an AC adapter because this converter can accommodate an input voltage up to 40V.

■ FEATURES

* Input voltage：8V~40V
* Duty ratio：0%~100% PWM control
* Enable with Soft-Start function
* Oscillation frequency can be set by outside resistance
* Current Limit, SCP and OTP

■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
P4596L-SH2-R	P4596G-SH2-R	HSOP-8	Tape Reel

P4596G-SH2-R

(1)Packing Type — (1) R: Tape Reel

(2)Package Type — (2) SH2: HSOP-8

(3)Green Package — (3) G: Halogen Free and Lead Free, L: Lead Free

■ MARKING

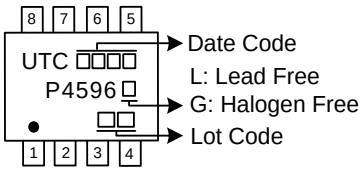

Copyright © 2019 Unisonic Technologies Co., Ltd

■ PIN CONFIGURATION

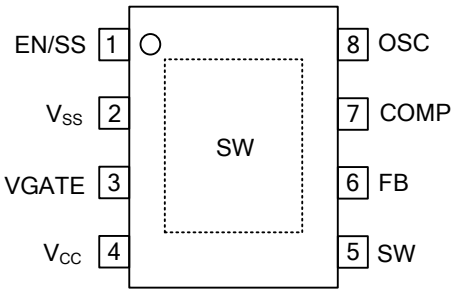

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	EN/SS	Enable and Soft-start pin
2	V_{SS}	Ground
3	VGATE	Driver GATE clamping pin.
4	V_{CC}	IC power supply pin
5	SW	Switch pin.
6	FB	Feedback voltage
7	COMP	Compensation pin
8	OSC	Frequency Set Pin.

■ BLOCK DIAGRAM

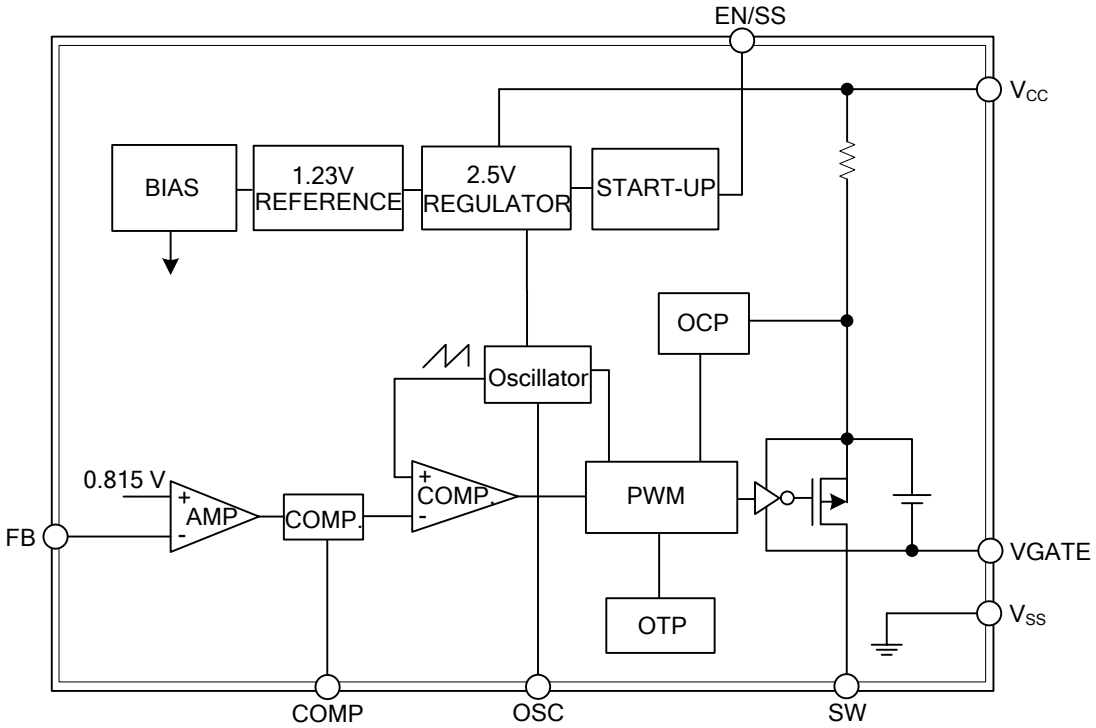

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
VCC Pin Voltage	V_{CC}	V_{SS}-0.3 ~ V_{SS}+40	V
Feedback Pin Voltage	V_{FB}	V_{SS}-0.3 ~ 6	V
EN/SS Pin Voltage	$V_{EN/SS}$	V_{SS}-0.3 ~ 6	V
OSC Pin Voltage	V_{OSC}	V_{SS}-0.3 ~ 3	V
COMP Pin Voltage	V_{COMP}	V_{SS}-0.3 ~ 6	V
VGATE Pin Voltage	V_{GATE}	V_{SS}-0.3 ~ V_{CC}	V
Switch Pin Voltage	V_{SW}	V_{SS} - 0.3 ~ V_{CC} + 0.3	V
Power Dissipation	P_D	0.7	W
Operating Supply Voltage	V_{OP}	8 ~ 40	V
Junction Temperature	T_J	-40 ~ +125	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	θ_{JA}	143	°C/W
Junction to Case	θ_{JC}	45	°C/W

Note: Surface mounted on 1 in^2 copper pad of FR4 board.

■ ELECTRICAL CHARACTERISTICS (V_{CC}=12V, T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Feedback Voltage	V_{FB}	V_{CC}=10V~30V, I_{OUT}=0~2A T_J=-20°C~125°C	0.790	0.815	0.840	V
Quiescent Current	I_{CCQ}	V_{FB}=1V		3	6	mA
Feedback Bias Current	I_{FB}			0.1		μA
Shutdown Supply Current	I_{SD}	$V_{EN/SS}$=0V	10	56	300	μA
Current Limit	I_{CL}		3.5			A
Adjustable Frequency Range	F_{OSC}	R3=240KΩ		200		KHz
Short Frequency	F_{OSC1}	V_{CC}=10V~30V		50		KHz
EN/SS Pin Shutdown Logic Input Threshold Voltage	V_{ENL}				0.8	V
EN/SS Pull High Current	$I_{EN/SS}$	$V_{EN/SS}$=0V		8		μA
Internal MOSFET R_{DSON}	R_{DSON}	V_{CC}=12V, V_{FB}=0V		80	180	mΩ

■ TYPICAL APPLICATION CIRCUIT

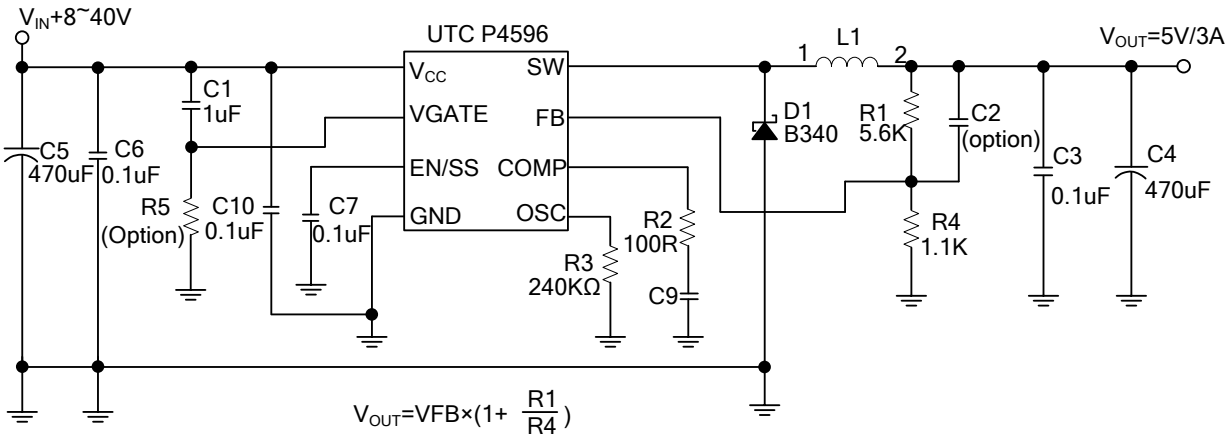

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.