



SS14

Preliminary

DIODE

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


DESCRIPTION

The UTC **SS14** is a surface mount schottky barrier rectifier, it uses UTC's advanced technology to provide customers with high current capacity, high efficiency and low forward voltage, etc.

The UTC **SS14** is suitable for polarity protection, low voltage high frequency inverters and free wheeling applications, etc.

FEATURES

- * High current capacity
- * Low forward voltage
- * Low power consumption
- * High efficiency

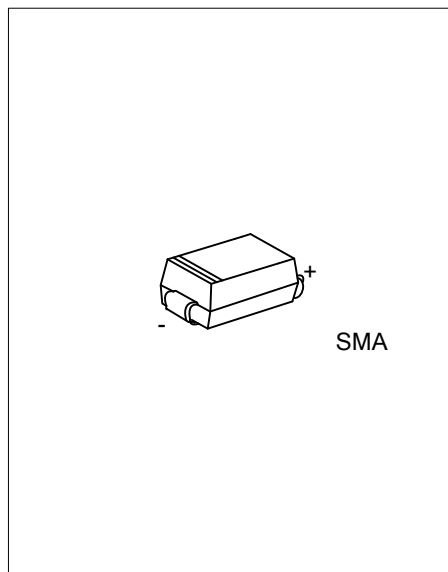


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SS14L-SMA-R	SS14G-SMA-R	SMA	K	A	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>SS14G-SMA-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) SMA: SMA (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	--

MARKING



■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

PARAMETER		SYMBOL	RATINGS	UNIT
Recurrent Peak Reverse Voltage		V_{RRM}	40	V
RMS Voltage		V_{RMS}	28	V
Average Forward Current	.375" (9.5mm) lead length at $T_L=75^{\circ}\text{C}$	$I_{F(AV)}$	1.0	A
Peak Forward Surge Current	8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30	A
Storage Temperature		T_{STG}	$-40 \sim +150$	$^{\circ}\text{C}$
Operating Junction Temperature		T_J	$-40 \sim +150$	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA ($T_A=25^{\circ}\text{C}$, unless otherwise specified.) (Note)

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	88	$^{\circ}\text{C}/\text{W}$
Junction to Case	θ_{JC}	28	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage (Note)	V_F	$I_F=1.0\text{A}$			0.5	V
DC Reverse Current at Rated DC	I_R	$T_J=25^{\circ}\text{C}$			0.5	mA
Blocking Voltage		$T_J=100^{\circ}\text{C}$			50	mA

Note: Pulse test with $PW=300\mu\text{s}$, 1% duty cycle.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.