

**U74HC377****CMOS IC****OCTAL D-TYPE FLIP-FLOPS
WITH CLOCK ENABLE****■ DESCRIPTION**

The device is positive-edge-triggered octal D-type flip-flops with an enable input.

Information at the data (D) inputs meeting the setup time requirements is transferred to the Q outputs on the positive-going edge of the clock (CLK) pulse, if $\overline{EN}$ is low. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When CLK is at either the high or low level, the D input has no effect at the output. These devices are designed to prevent false clocking by transitions at $\overline{EN}$.


■ FEATURES

- * Wide Operating Voltage Range of 2V to 6V
- * Outputs Can Drive Up To 10 LSTTL Loads
- * Low Power Consumption, $I_{CC}=8\mu A$ (Max.)
- * Typical $t_{PD}=12ns$
- * $\pm 4mA$ Output Drive at 5V
- * Low Input Current of $1\mu A$ Max.
- * Eight Flip-Flops With Single-Rail Outputs
- * Clock Enable Latched to Avoid False Clocking
- * Applications Include
 - Buffer/Storage Registers
 - Shift Registers
 - Pattern Generators


■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HC377L-S20-R	U74HC377G-S20-R	SOP-20	Tape Reel
U74HC377L-P20-R	U74HC377G-P20-R	TSSOP-20	Tape Reel


U74HC377G-S20-R (1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S20: SOP-20, P20: TSSOP-20 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

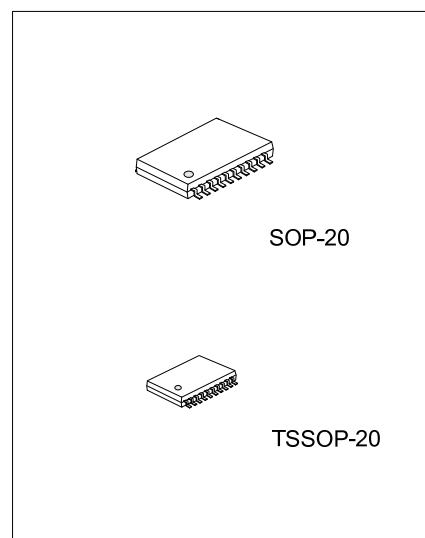

MARKING

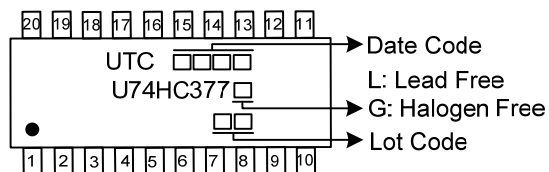

PIN CONFIGURATION

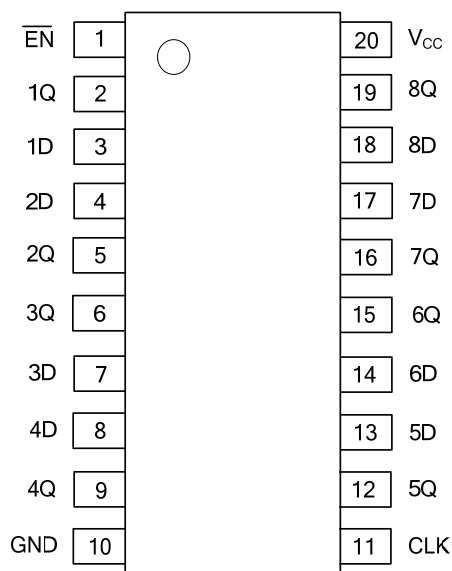


PIN DESCRIPTION

PIN	SYMBOL	DESCRIPTION
1	$\overline{EN}$	Data Enable Input (Active low)
2	1Q	Flip-flop Output
3	1D	Data Input
4	2D	Data Input
5	2Q	Flip-flop Output
6	3Q	Flip-flop Output
7	3D	Data Input
8	4D	Data Input
9	4Q	Flip-flop Output
10	GND	Ground (0V)
11	CLK	Clock Input (Low-to-High, Edge Triggered)
12	5Q	Flip-flop Output
13	5D	Data Input
14	6D	Data Input
15	6Q	Flip-Flop Output
16	7D	Flip-Flop Output
17	7Q	Data Input
18	8D	Data Input
19	8Q	Flip-Flop Output
20	V_{CC}	Supply Voltage


■ FUNCTION TABLE

INPUTS			OUTPUT Q
$\overline{\text{EN}}$	CLK	D	
H	X	X	Q_0
L	↑	H	H
L	↑	L	L
X	L	X	Q_0


■ FUNCTIONAL DIAGRAM

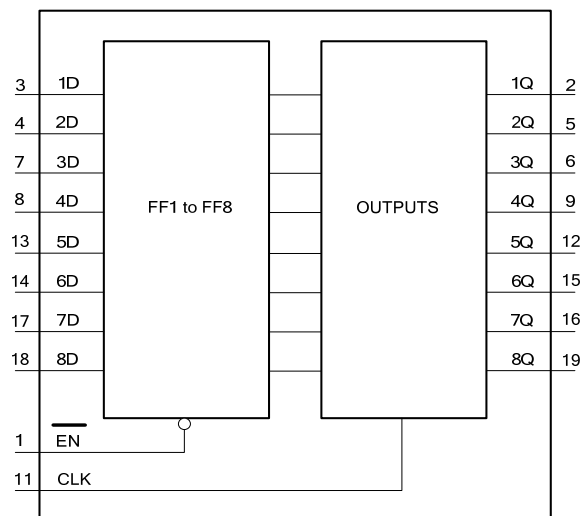

■ LOGIC SYMBOL

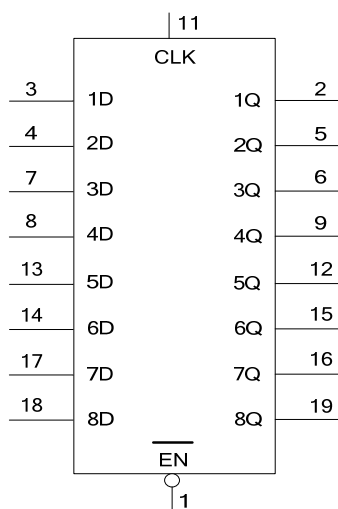

■ **LOGIC DIAGRAM (POSITIVE LOGIC)**

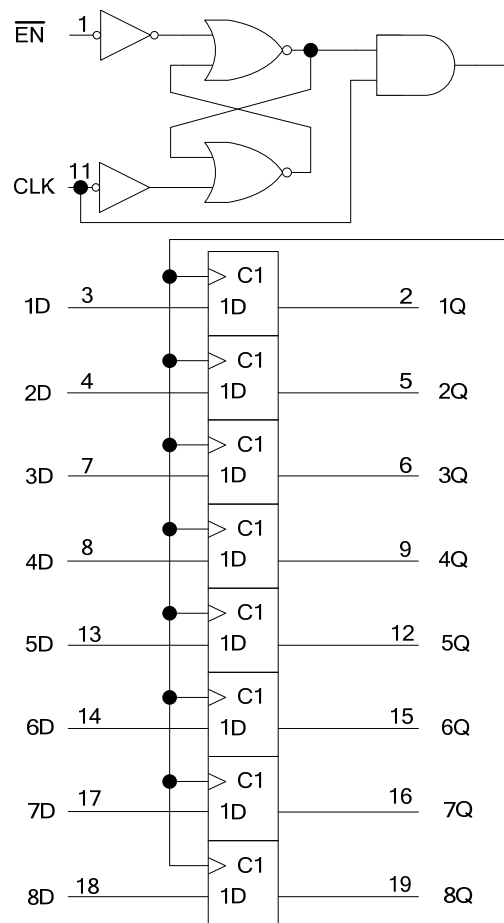

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 7	V
V_{CC} or GND Current	I_{CC}	±50	mA
Output Current	I_{OUT}	±25	mA
Input Clamp Current	I_{IK}	±20	mA
Output Clamp Current	I_{OK}	±20	mA
Storage Temperature	T_{STG}	-65 ~ + 150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2	5	6	V
High-level Input Voltage	V_{IH}	$V_{CC}=2V$	1.5			V
		$V_{CC}=4.5V$	3.15			
		$V_{CC}=6V$	4.2			
Low-level Input Voltage	V_{IL}	$V_{CC}=2V$			0.5	V
		$V_{CC}=4.5V$			1.35	
		$V_{CC}=6V$			1.8	
Input Voltage	V_{IN}		0		V_{CC}	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise/Fall Time	$\Delta t/\Delta v$	$V_{CC}=2V$			1000	ns
		$V_{CC}=4.5V$			500	
		$V_{CC}=6V$			400	
Operating Free-air Temperature	T_A		-40		+85	°C

Note: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SOP-20	58	°C/W
	TSSOP-20	83	

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage High-Level	V_{OH}	$V_{CC}=2V, I_{OH}=-20\mu A$	1.9	1.998		V
		$V_{CC}=4.5V, I_{OH}=-20\mu A$	4.4	4.499		
		$V_{CC}=6V, I_{OH}=-20\mu A$	5.9	5.999		
		$V_{CC}=4.5V, I_{OH}=-4mA$	3.98	4.3		
		$V_{CC}=6V, I_{OH}=-5.2mA$	5.48	5.8		
Output Voltage Low-Level	V_{OL}	$V_{CC}=2V, I_{OL}=20\mu A$		0.002	0.1	V
		$V_{CC}=4.5V, I_{OL}=20\mu A$		0.001	0.1	
		$V_{CC}=6V, I_{OL}=20\mu A$		0.001	0.1	
		$V_{CC}=4.5V, I_{OL}=4mA$		0.17	0.26	
		$V_{CC}=6V, I_{OL}=5.2mA$		0.15	0.26	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=6V, V_{IN}=V_{CC}$ or GND		±0.1	±100	nA
Quiescent Supply Current	I_{CC}	$V_{CC}=6V, V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			8	μA
Input Capacitance	C_I	$V_{CC}=2V$ to 6V		3	10	pF

■ TIMING REQUIREMENTS ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Clock frequency		f _{CLOCK}	V _{CC} =2.0V			5	MHz
			V _{CC} =4.5V			25	MHz
			V _{CC} =6.0V			29	MHz
Pulse duration	CLK high or low	t _w	V _{CC} =2.0V	100			ns
			V _{CC} =4.5V	20			ns
			V _{CC} =6.0V	17			ns
Setup time before CLK↑	D	t _{su}	V _{CC} =2.0V	100			ns
			V _{CC} =4.5V	20			ns
			V _{CC} =6.0V	17			ns
	$\overline{\text{EN}}$ high or low		V _{CC} =2.0V	100			ns
			V _{CC} =4.5V	20			ns
			V _{CC} =6.0V	17			ns
Hold time after CLK↑	$\overline{\text{EN}}$ inactive or active, data	t _h	V _{CC} =2.0V	5			ns
			V _{CC} =4.5V	5			ns
			V _{CC} =6.0V	5			ns



■ SWITCHING CHARACTERISTICS ($t_r = t_f = 6\text{ns}$, $C_L = 50\text{pF}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Minimum Frequency Response	f_{MAX}	$V_{\text{CC}}=2.0\text{V}$	5	11		ns
		$V_{\text{CC}}=4.5\text{V}$	25	54		ns
		$V_{\text{CC}}=6.0\text{V}$	29	64		ns
From CLK to Q	t_{PD}	$V_{\text{CC}}=2.0\text{V}$		56	160	ns
		$V_{\text{CC}}=4.5\text{V}$		15	32	ns
		$V_{\text{CC}}=6.0\text{V}$		12	27	ns
To Any	t_t	$V_{\text{CC}}=2.0\text{V}$		38	75	ns
		$V_{\text{CC}}=4.5\text{V}$		8	15	ns
		$V_{\text{CC}}=6.0\text{V}$		6	13	ns


■ OPERATING CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	No load.		30		pF

■ TEST CIRCUIT AND WAVEFORMS

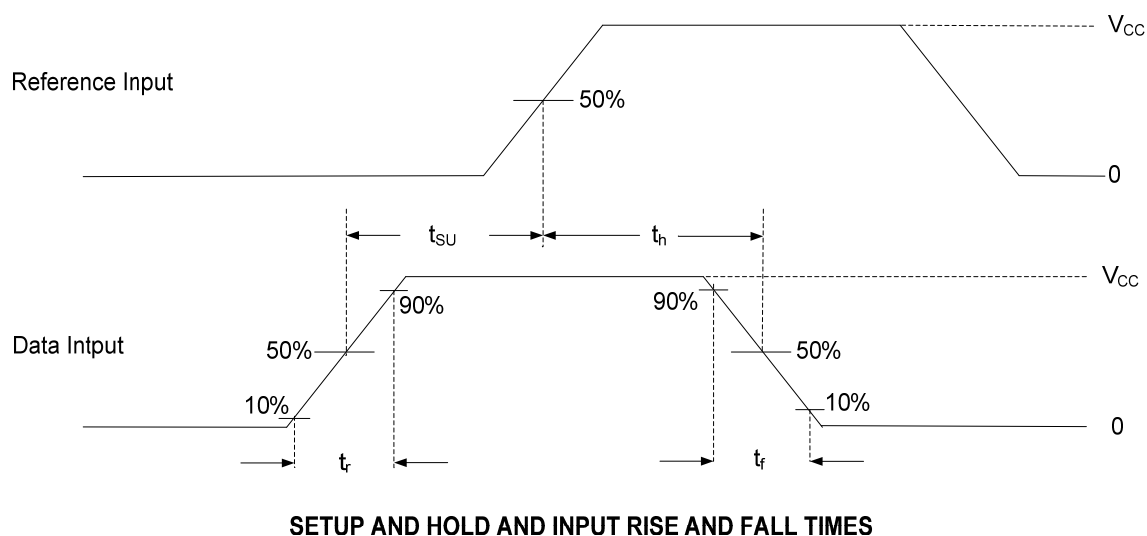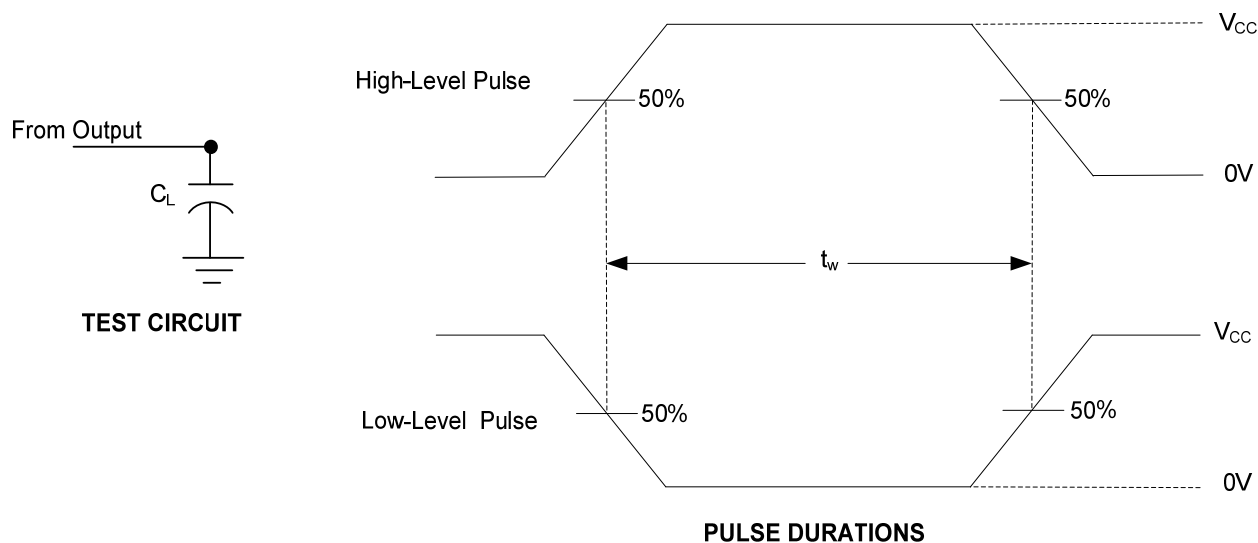

■ TEST CIRCUIT AND WAVEFORMS (Cont.)

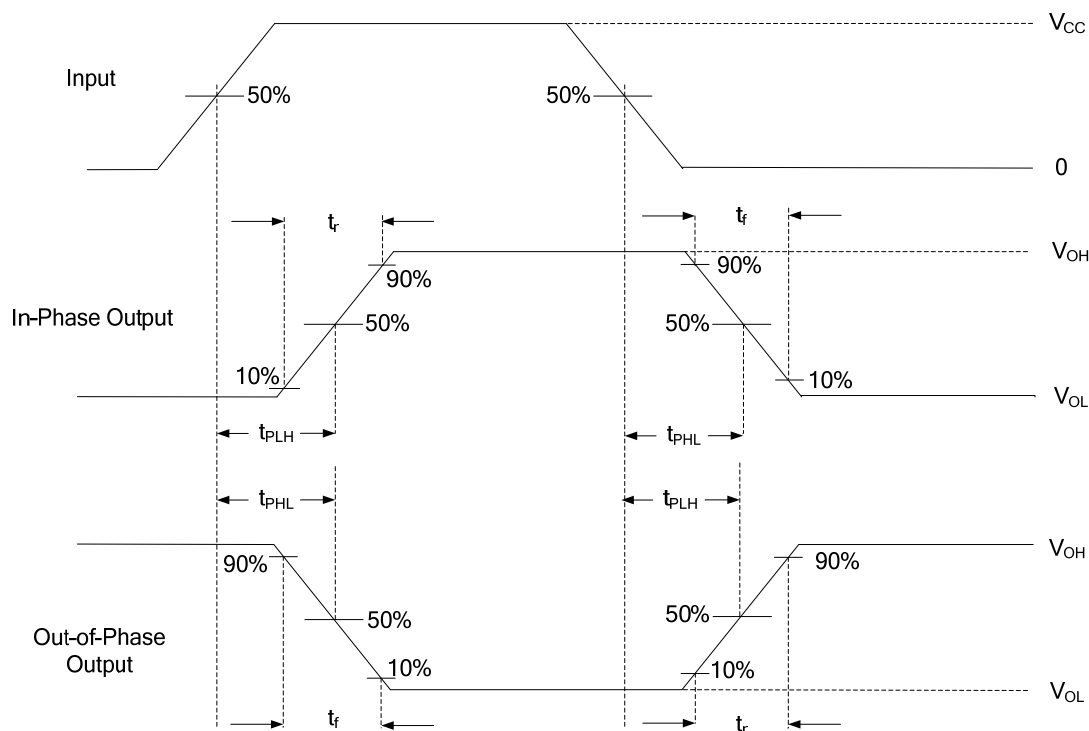

PROPAGATION DELAY AND OUTPUT TRANSITION TIMES

Notes: A. C_L includes probe and test-fixture capacitance.

B. Phase relationships between waveforms were chosen arbitrarily. All input pulse are supplied by generators having the following characteristics: $PRR \leq 1\text{MHz}$, $Z_O = 50\Omega$.

C. For clock inputs, f_{MAX} is measured when the input duty cycle is 50%.

D. The outputs are measured one at a time with one input transition per measurement.

E. t_{PLH} and t_{PHL} are the same as t_{PD} .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.