

## 12N40K-MT

Preliminary


Power MOSFET

12A, 400V N-CHANNEL  
POWER MOSFET

## ■ DESCRIPTION

The UTC **12N40K-MT** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology specializes in allowing a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **12N40K-MT** is universally applied in electronic lamp ballast based on half bridge topology and high efficient switched mode power supply.

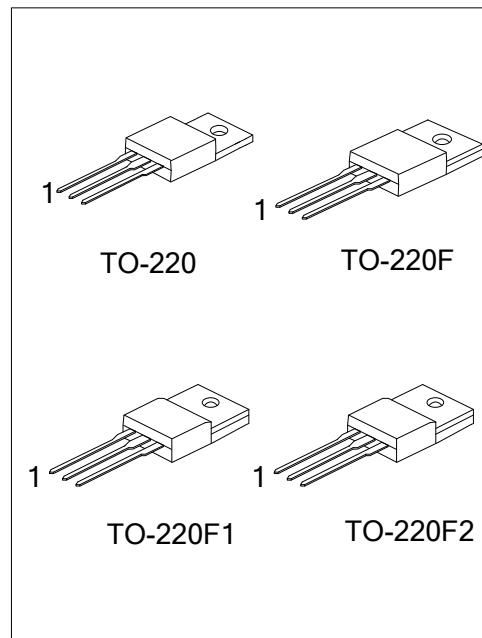


## ■ FEATURES

- \*  $R_{DS(ON)} < 0.47\Omega$  @  $V_{GS} = 10$  V,  $I_D = 12$  A

- \* High switching speed

- \* 100% avalanche tested

## ■ SYMBOL

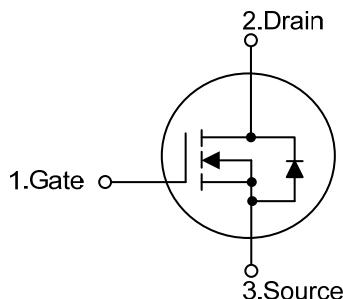


## ■ ORDERING INFORMATION

| Ordering Number |               | Package  | Pin Assignment |   |   | Packing |
|-----------------|---------------|----------|----------------|---|---|---------|
| Lead Free       | Halogen Free  |          | 1              | 2 | 3 |         |
| 12N40KL-TA3-T   | 12N40KG-TA3-T | TO-220   | G              | D | S | Tube    |
| 12N40KL-TF3-T   | 12N40KG-TF3-T | TO-220F  | G              | D | S | Tube    |
| 12N40KL-TF1-T   | 12N40KG-TF1-T | TO-220F1 | G              | D | S | Tube    |
| 12N40KL-TF2-T   | 12N40KG-TF2-T | TO-220F2 | G              | D | S | Tube    |

Note: Pin Assignment: G: Gate    D: Drain    S: Source

|                   |  |
|-------------------|--|
| <br>12N40KL-TA3-T | (1)T: Tube   |
|                   | (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1,<br>TF2: TO-220F2 |
|                   | (3) L: Lead Free, G: Halogen Free and Lead Free                |

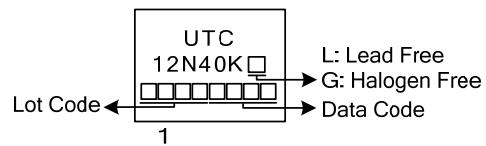**■ MARKING**

■ ABSOLUTE MAXIMUM RATINGS ( $T_c=25^\circ\text{C}$ , unless otherwise specified)

| PARAMETER                       |                                       | SYMBOL    | RATINGS  | UNIT                |
|---------------------------------|---------------------------------------|-----------|----------|---------------------|
| Drain-Source Voltage            |                                       | $V_{DSS}$ | 400      | V                   |
| Gate-Source Voltage             |                                       | $V_{GSS}$ | $\pm 30$ | V                   |
| Drain Current                   | Continuous ( $T_c=25^\circ\text{C}$ ) | $I_D$     | 12       | A                   |
|                                 | Pulsed (Note 2)                       | $I_{DM}$  | 48       | A                   |
| Single Pulsed Avalanche Energy  |                                       | $E_{AS}$  | 474      | mJ                  |
| Power Dissipation               | TO-220                                | $P_D$     | 135      | W                   |
|                                 | TO-220F/TO-220F1                      |           | 34       | W                   |
|                                 | TO-220F2                              |           | 1.08     | W/ $^\circ\text{C}$ |
| Derate above $25^\circ\text{C}$ | TO-220                                |           | 0.27     | W/ $^\circ\text{C}$ |
|                                 | TO-220F/TO-220F1                      |           |          |                     |
|                                 | TO-220F2                              |           |          |                     |
| Junction Temperature            | $T_J$                                 |           | +150     | $^\circ\text{C}$    |
| Storage Temperature             | $T_{STG}$                             |           | -55~+150 | $^\circ\text{C}$    |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature

4.  $L=7.27\text{mH}$ ,  $I_{AS}=11\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$

5.  $I_{SD} \leq 11\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J=25^\circ\text{C}$

■ THERMAL DATA

| PARAMETER           |                  | SYMBOL        | RATINGS | UNIT               |
|---------------------|------------------|---------------|---------|--------------------|
| Junction to Ambient |                  | $\theta_{JA}$ | 62.5    | $^\circ\text{C/W}$ |
| Junction to Case    | TO-220           | $\theta_{JC}$ | 0.92    | $^\circ\text{C/W}$ |
|                     | TO-220F/TO-220F1 |               |         |                    |
|                     | TO-220F2         |               | 3.7     | $^\circ\text{C/W}$ |


■ ELECTRICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$ , unless otherwise noted)

| PARAMETER  | SYMBOL                     | TEST CONDITIONS  | MIN | TYP  | MAX          | UNIT          |
|--|----------------------------|--|-----|------|--------------|---------------|
| <b>OFF CHARACTERISTICS</b>                             |                            |  |     |      |              |               |
| Drain-Source Breakdown Voltage                         | $\text{BV}_{\text{DSS}}$   | $I_D=250\mu\text{A}, V_{\text{GS}}=0\text{V}$  | 400 |      |              | V             |
| Drain-Source Leakage Current                           | $I_{\text{DSS}}$           | $V_{\text{DS}}=400\text{V}, V_{\text{GS}}=0\text{V}$   |     |      | 1            | $\mu\text{A}$ |
| Gate- Source Leakage Current                           | $I_{\text{GSS}}$           | $V_{\text{GS}}=+30\text{V}, V_{\text{DS}}=0\text{V}$<br>$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$   |     |      | +100<br>-100 | nA            |
| <b>ON CHARACTERISTICS</b>                              |                            |  |     |      |              |               |
| Gate Threshold Voltage                                 | $V_{\text{GS}(\text{TH})}$ | $V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$  | 2.0 |      | 4.0          | V             |
| Static Drain-Source On-State Resistance                | $R_{\text{DS}(\text{ON})}$ | $V_{\text{GS}}=10\text{V}, I_D=12\text{A}$   |     |      | 0.47         | $\Omega$      |
| <b>DYNAMIC PARAMETERS</b>                              |                            |  |     |      |              |               |
| Input Capacitance                                      | $C_{\text{ISS}}$           | $V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1.0\text{MHz}$   |     | 750  |              | pF            |
| Output Capacitance                                     | $C_{\text{OSS}}$           |  |     | 153  |              | pF            |
| Reverse Transfer Capacitance                           | $C_{\text{RSS}}$           |  |     | 10   |              | pF            |
| <b>SWITCHING PARAMETERS</b>                            |                            |  |     |      |              |               |
| Total Gate Charge                                      | $Q_G$                      | $V_{\text{DS}}= 50\text{V}, V_{\text{GS}}= 10\text{V}, I_D = 0.3\text{A},$<br>$I_D=100\mu\text{A}$ (Note 1, 2) |     | 31.3 |              | nC            |
| Gate-Source Charge                                     | $Q_{\text{GS}}$            |  |     | 8.9  |              | nC            |
| Gate-Drain Charge                                      | $Q_{\text{GD}}$            |  |     | 8.6  |              | nC            |
| Turn-ON Delay Time                                     | $t_{\text{D}(\text{ON})}$  | $V_{\text{DS}}= 30\text{V}, V_{\text{GS}}= 10\text{V}, I_D = 0.3\text{A},$<br>$R_G = 25\Omega$ (Note 1, 2)     |     | 62   |              | ns            |
| Rise Time  | $t_R$                      |  |     | 94   |              | ns            |
| Turn-OFF Delay Time                                    | $t_{\text{D}(\text{OFF})}$ |  |     | 162  |              | ns            |
| Fall-Time  | $t_F$                      |  |     | 96   |              | ns            |
| <b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b> |                            |  |     |      |              |               |
| Drain-Source Diode Forward Voltage                     | $V_{\text{SD}}$            | $I_S=12\text{A}, V_{\text{GS}}=0\text{V}$  |     |      | 1.4          | V             |
| Maximum Body-Diode Continuous Current                  | $I_S$                      |  |     |      | 12           | A             |
| Maximum Body-Diode Pulsed Current                      | $I_{\text{SM}}$            |  |     |      | 48           | A             |


Notes: 1. Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$ 

2. Essentially independent of operating temperature

■ TEST CIRCUITS AND WAVEFORMS


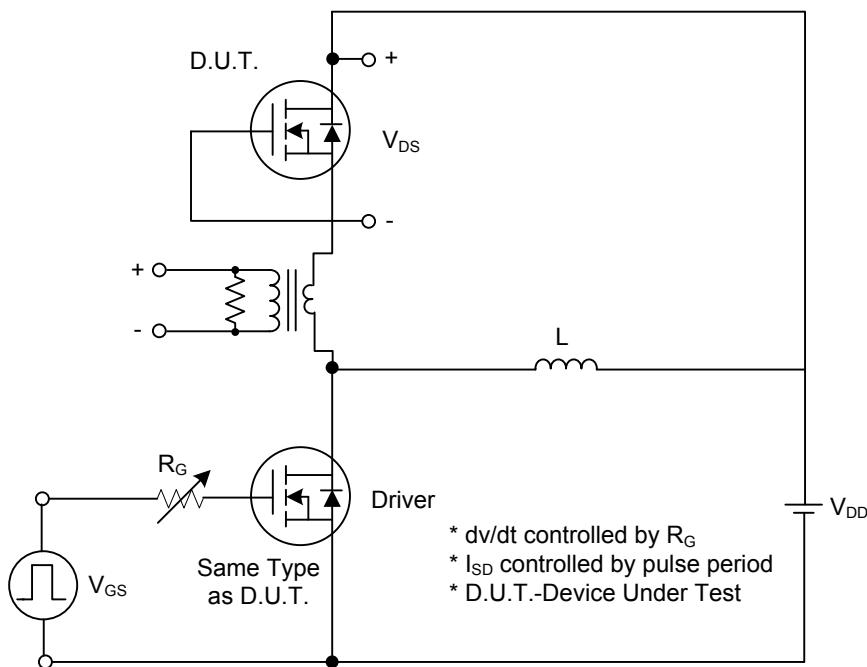


Peak Diode Recovery dv/dt Test Circuit

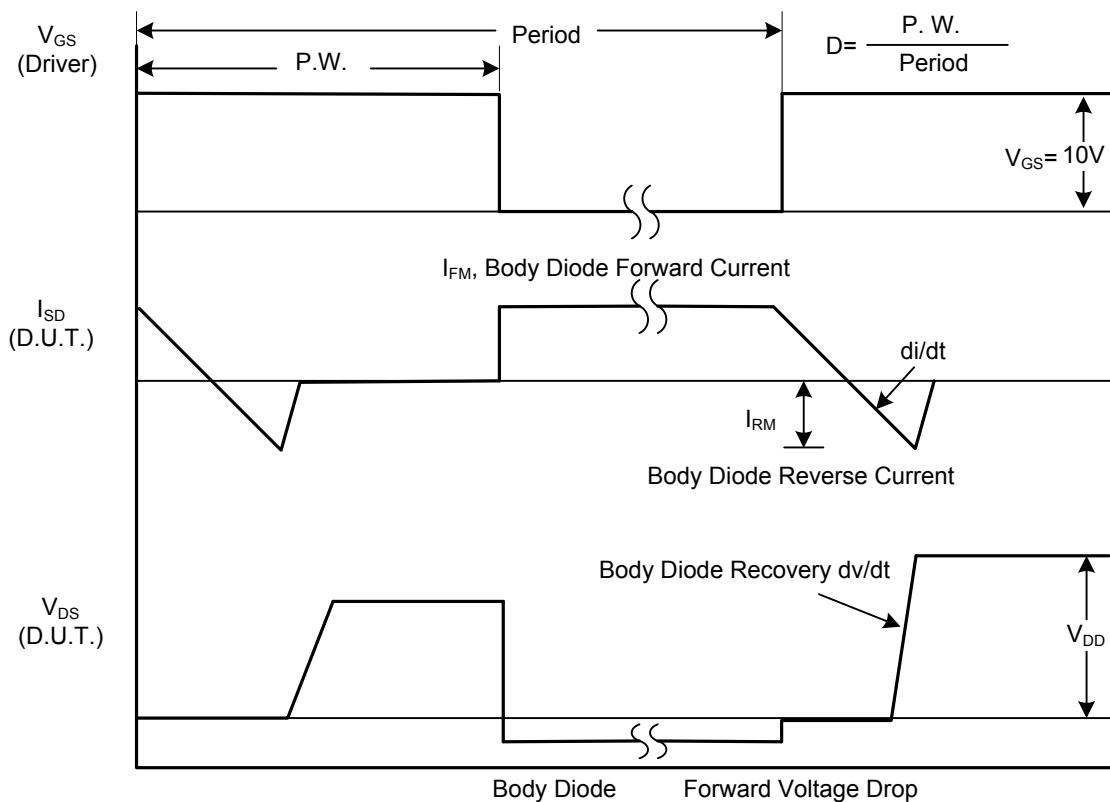



Peak Diode Recovery dv/dt Waveforms

■ TEST CIRCUITS AND WAVEFORMS (Cont.)

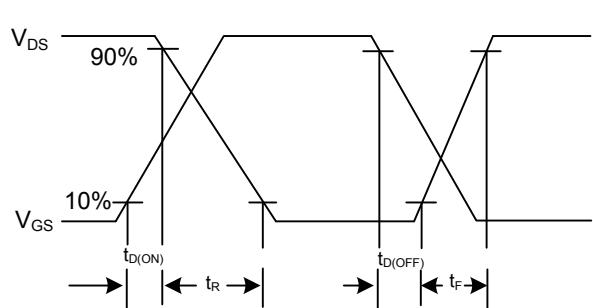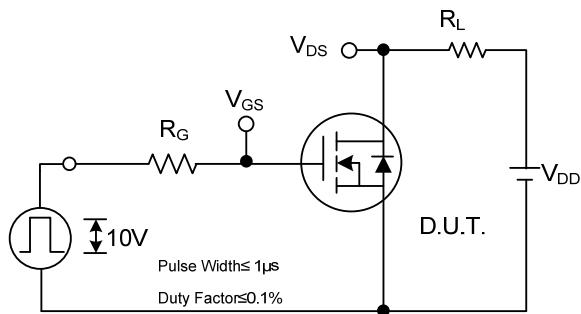



Switching Test Circuit

Switching Waveforms

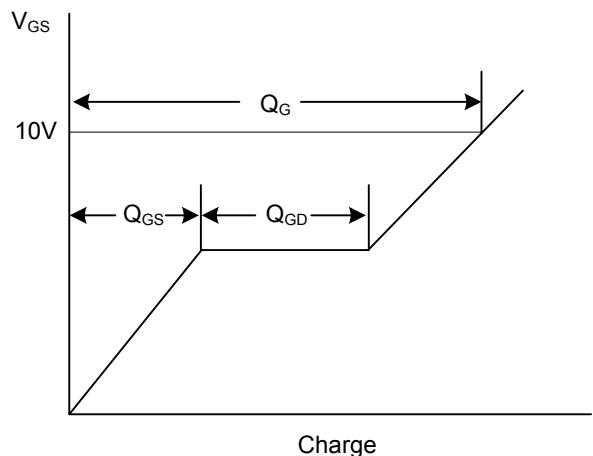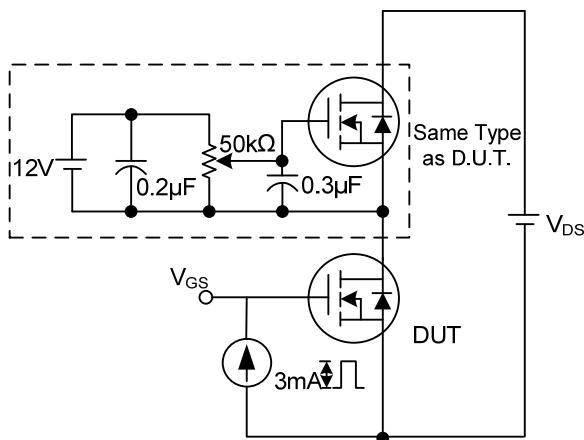

Gate Charge Test Circuit

Gate Charge Waveform

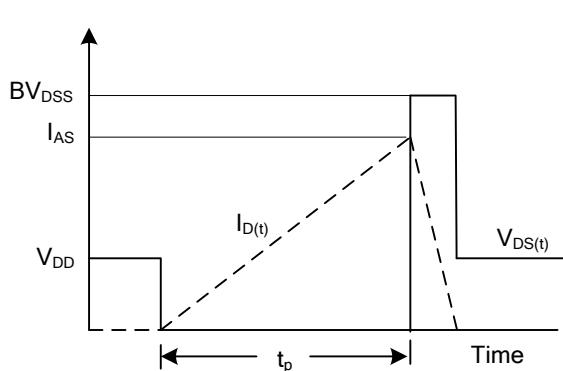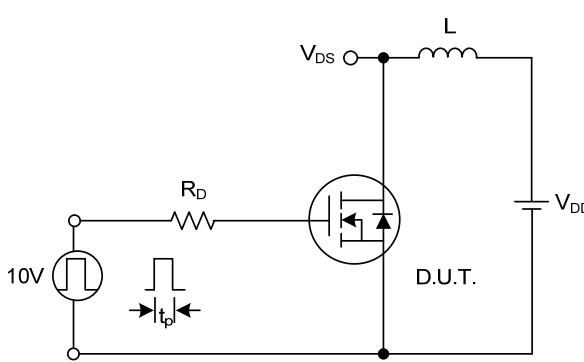

Unclamped Inductive Switching Test Circuit

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

