



ULF0291

Preliminary

CMOS IC

6 SEGMENTS LINEAR LED DRIVER


DESCRIPTION

The UTC **ULF0291** is a 6-segments linear LED driver with little flash.

The UTC **ULF0291** is suitable for LED lighting.

FEATURES

- 6-segments
- Little flash
- Low static current consumption

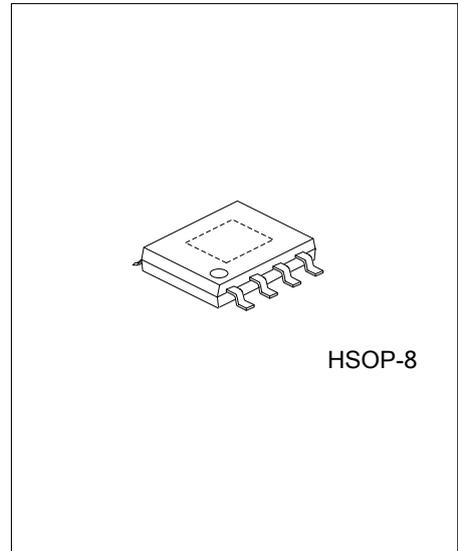


ORDERING INFORMATION


Ordering Number	Package	Packing
ULF0291G-SH2-R	HSOP-8	Tape Reel

<p>ULF0291G-SH2-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) SH2: HSOP-8 (3) G: Halogen Free and Lead Free
---	--

MARKING




■ PIN CONFIGURATION

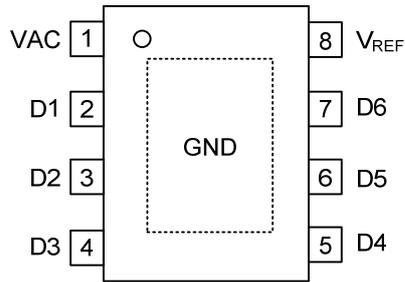

■ PIN DESCRIPTION

Pin No	Pin Name	Function Description
1	VAC	Power input
2	D1	Current output port 1
3	D2	Current output port 2
4	D3	Current output port 3
5	D4	Current output port 4
6	D5	Current output port 5
7	D6	Current output port 6
8	V _{REF}	Reference voltage setting current of each port
Back plane	GND	GND is the ground connect port

■ BLOCK DIAGRAM

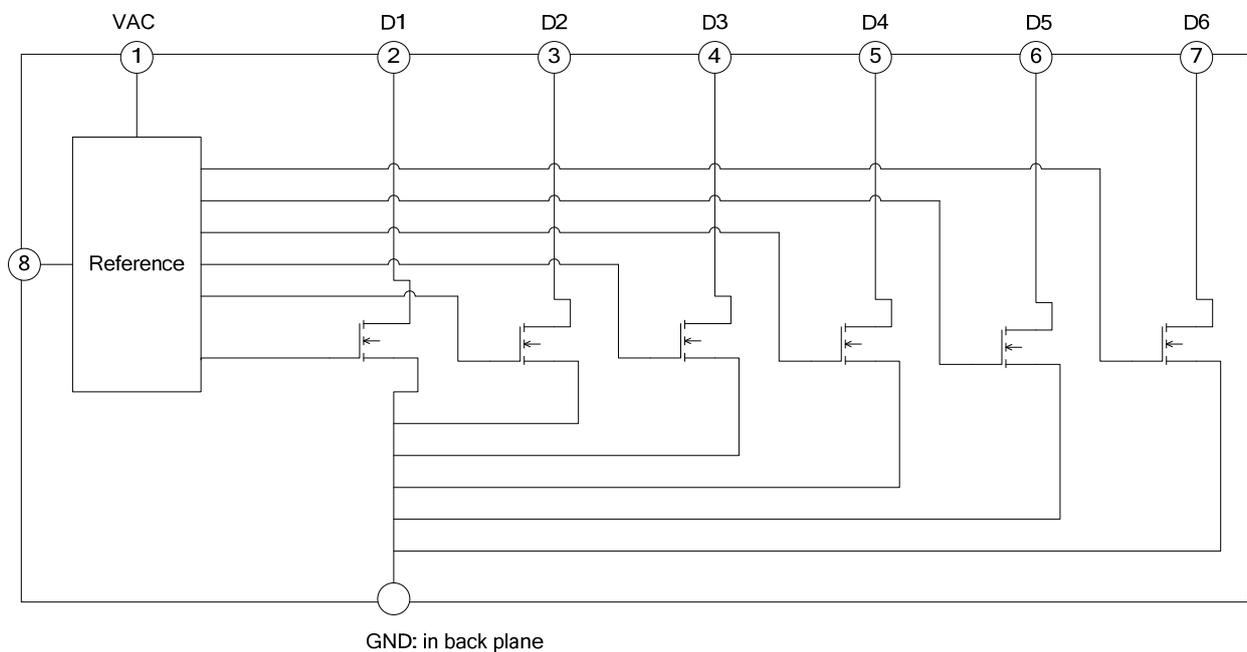

■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
VAC, D1, D2, D3, D4, D5, D6	V_{MAX}	500	V
VREF	V_{MAX}	-0.3 ~ 10	V
Power Dissipation	P_D	1.25	W
Junction Temperature	T_J	-40 ~ +125	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +125	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ THERMAL RESISTANCES CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	100	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	VAC	For 220V application		220	260	V
Static Current	I_{CC}	VAC=40V, $V_{\text{REF}}=6\text{V}$		0.1	0.2	mA
Driving Current	ID1	$V_{\text{REF}}=6\text{V}$		18		mA
Driving Current	ID2-ID6	$V_{\text{REF}}=6\text{V}$		36		mA
Leakage Current	I_{leak}	For High Voltage MOS			0.1	μA
Over Voltage Protection	V_{OVP}	Voltage in D6	100	120	140	V
Response Time	T_{OVP}	$V_{\text{REF}}=6\text{V}$			0.1	μS
Temp Coeff. Of Current	T_C			-0.3		$\%/^{\circ}\text{C}$
Current at Switching Point	I_{SW}			10		mA

■ TYPICAL APPLICATION CIRCUIT

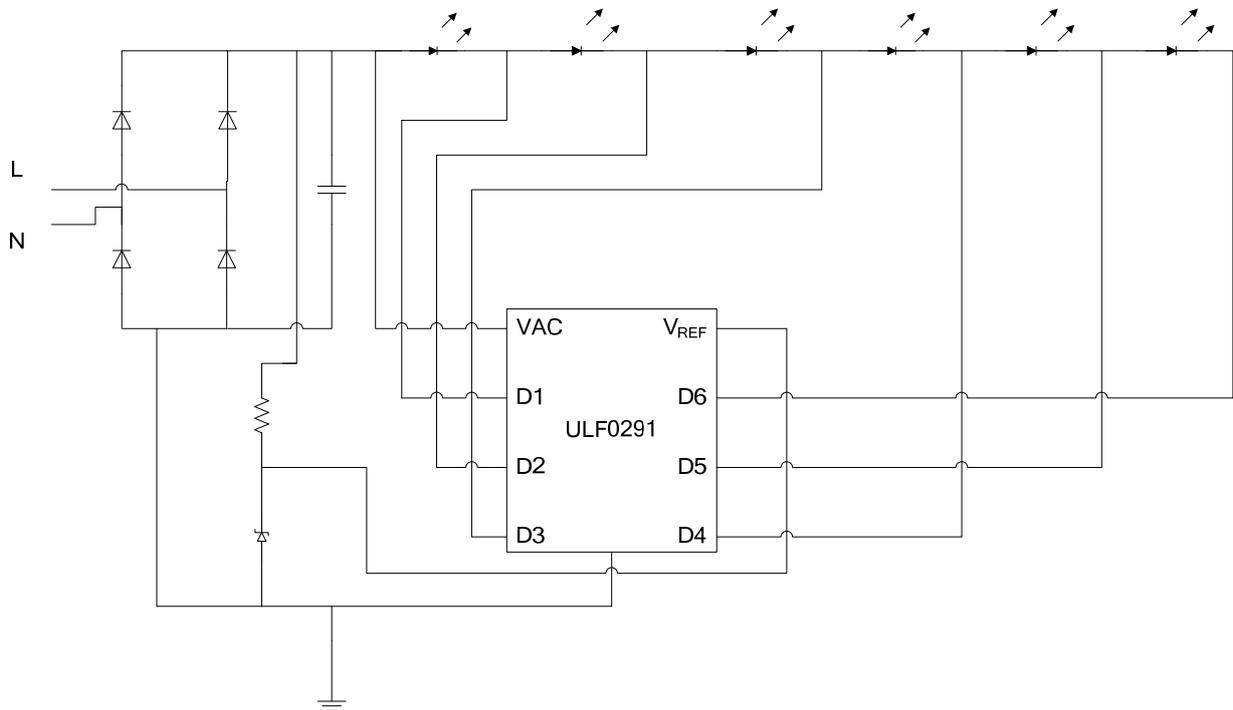

Application circuit

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.