



US2236095DB


Preliminary

LINEAR INTEGRATED CIRCUIT

ULTRA SMALL, LOW INPUT VOLTAGE, LOW R_{ON} , LOAD SWITCHES

DESCRIPTION

The UTC **US2236095DB** is ultra-small, low ON resistance (R_{ON}) load switches with controlled turn on. The devices contain a P-channel MOSFET that operates over an input voltage range of 1.0 V to 3.6 V. The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage control signals. In UTC **US2236095DB**, a 120- Ω on-chip load resistor is added for output quick discharge when the switch is turned off.



SOP-8

FEATURES


- * Low Input Voltage: 1.0V~3.6V
- * Ultra-Low ON Resistance
 - $R_{ON} = 78\text{ m}\Omega$ at $V_{IN} = 3.6\text{V}$
 - $R_{ON} = 93\text{ m}\Omega$ at $V_{IN} = 2.5\text{V}$
 - $R_{ON} = 109\text{ m}\Omega$ at $V_{IN} = 1.8\text{V}$
 - $R_{ON} = 146\text{ m}\Omega$ at $V_{IN} = 1.2\text{V}$
- * 500mA Maximum Continuous Switch Current
- * Ultra Low Quiescent Current: 82nA at 1.8V
- * Ultra Low Shutdown Current: 44nA at 1.8V
- * Low Control Input Thresholds Enable Use of 1.2-V/1.8-V/2.5-V/3.3-V Logic
- * Controlled Slew Rate to Avoid Inrush Currents: 220- μs t_r

ORDERING INFORMATION


| Ordering Number | | Package | Packing |
|--------------------|--------------------|---------|-----------|
| Lead Free | Halogen Free | | |
| US2236095DBL-S08-R | US2236095DBG-S08-R | SOP-8 | Tape Reel |

| | |
|---|--|
| <p>US2236095DBG-S08-R</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p> | <p>(1) R: Tape Reel (2) S08: SOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|---|--|

MARKING

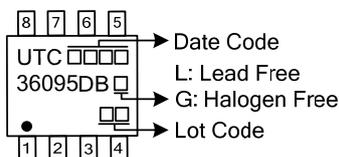


■ PIN CONFIGURATION

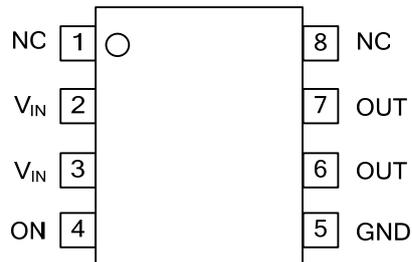

■ PIN DESCRIPTION

| PIN NO. | PIN NAME | DESCRIPTION |
|---------|------------------|--|
| 1, 8 | NC | |
| 2, 3 | V _{IN} | Switch input, bypass this input with a ceramic capacitor to ground |
| 4 | ON | Switch control input, active high |
| 5 | GND | Ground |
| 6, 7 | V _{OUT} | Switch output |

■ BLOCK DIAGRAM

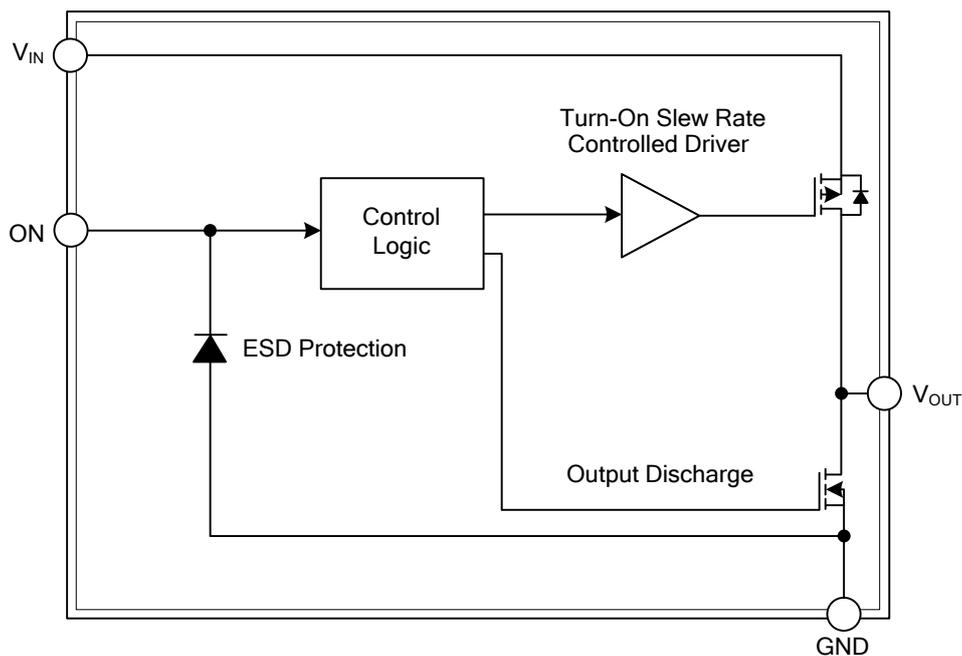

FUNCTION TABLE

| ON (Control Input) | V _{IN} to V _{OUT} | V _{OUT} to GND |
|--------------------|-------------------------------------|-------------------------|
| L | OFF | ON |
| H | ON | OFF |

■ ABSOLUTE MAXIMUM RATING

| PARAMETER | SYMBOL | RATINGS | UNIT |
|---|-----------|----------------|------------------|
| Input Voltage Range | V_{IN} | 4.0 | V |
| Output Voltage Range | V_{OUT} | $V_{IN} + 0.3$ | V |
| Input Voltage Range | V_{ON} | 4.0 | V |
| Maximum Continuous Switch Current | I_{MAX} | 500 | mA |
| Power Dissipation at $T_A=25^\circ\text{C}$ | P_D | 0.48 | W |
| Maximum junction Temperature | T_J | +125 | $^\circ\text{C}$ |
| Operating Temperature Range | T_{OPR} | -40 ~ +85 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 ~ +150 | $^\circ\text{C}$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

| PARAMETER | SYMBOL | RATINGS | UNIT |
|---------------------|---------------|---------|--------------------|
| Junction to Ambient | θ_{JA} | 205 | $^\circ\text{C/W}$ |

■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNIT |
|------------------------------|-----------|------|-----|----------|---------------|
| Input Voltage Range | V_{IN} | 1.0 | | 3.6 | V |
| Output Voltage Range | V_{OUT} | | | V_{IN} | |
| High-Level Input Voltage, ON | V_{IH} | 0.85 | | 3.6 | V |
| Low-Level Input Voltage, ON | V_{IL} | | | 0.4 | V |
| Input Capacitor | C_{IN} | 1.0 | | | μF |

■ ELECTRICAL CHARACTERISTICS ($V_{IN}=1.0\text{V}\sim 3.6\text{V}$, $T_A=25^\circ\text{C}$ unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP (Note) | MAX | UNIT | |
|----------------------------|-------------------|---|----------------------|------------|-----|----------|------------------|
| Quiescent Current | I_{IN} | $I_{OUT}=0$, $V_{IN}=V_{ON}$ | $V_{IN}=1.1\text{V}$ | | 37 | 120 | nA |
| | | | $V_{IN}=1.8\text{V}$ | | 82 | 235 | nA |
| | | | $V_{IN}=3.6\text{V}$ | | 204 | 880 | nA |
| OFF-State Supply Current | $I_{IN(OFF)}$ | $V_{ON}=\text{GND}$, $\text{OUT}=\text{Open}$ | $V_{IN}=1.1\text{V}$ | | 22 | 210 | nA |
| | | | $V_{IN}=1.8\text{V}$ | | 44 | 260 | nA |
| | | | $V_{IN}=3.6\text{V}$ | | 137 | 700 | nA |
| OFF-State Switch Current | $I_{IN(LEAKAGE)}$ | $V_{ON}=\text{GND}$, $V_{OUT}=0$ | $V_{IN}=1.1\text{V}$ | | 22 | 140 | nA |
| | | | $V_{IN}=1.8\text{V}$ | | 45 | 230 | nA |
| | | | $V_{IN}=3.6\text{V}$ | | 137 | 610 | nA |
| ON-State Resistance | R_{ON} | $I_{OUT}=-200\text{mA}$ | $V_{IN}=3.6\text{V}$ | | 78 | 95 | $\text{m}\Omega$ |
| | | | $V_{IN}=2.5\text{V}$ | | 93 | 110 | $\text{m}\Omega$ |
| | | | $V_{IN}=1.8\text{V}$ | | 109 | 130 | $\text{m}\Omega$ |
| | | | $V_{IN}=1.2\text{V}$ | | 146 | 200 | $\text{m}\Omega$ |
| | | | $V_{IN}=1.1\text{V}$ | | 174 | 330 | $\text{m}\Omega$ |
| Output Pulldown Resistance | R_{PD} | $V_{IN}=3.3\text{V}$, $V_{ON}=0$, $I_{OUT}=30\text{mA}$ | | 88 | 120 | Ω | |
| ON Input Leakage Current | I_{ON} | $V_{ON}=1.1\text{V}\sim 3.6\text{V}$ or GND | | | 25 | nA | |


Note: Typical values are at the specified V_{IN} and $T_A=25^\circ\text{C}$.

■ SWITCHING CHARACTERISTICS ($V_{IN}=3.6V$, $T_A=25^\circ C$ unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---------------------|-----------|-----------------|----------------|-----|-----|------|---------|
| Turn-ON Time | t_{ON} | $R_L=500\Omega$ | $C_L=0.1\mu F$ | | 166 | | μs |
| | | | $C_L=1\mu F$ | | 183 | | μs |
| | | | $C_L=3.3\mu F$ | | 201 | | μs |
| Turn-OFF Time | t_{OFF} | $R_L=500\Omega$ | $C_L=0.1\mu F$ | | 7 | | μs |
| | | | $C_L=1\mu F$ | | 45 | | μs |
| | | | $C_L=3.3\mu F$ | | 155 | | μs |
| V_{OUT} Rise Time | t_r | $R_L=500\Omega$ | $C_L=0.1\mu F$ | | 146 | | μs |
| | | | $C_L=1\mu F$ | | 146 | | μs |
| | | | $C_L=3.3\mu F$ | | 156 | | μs |
| V_{OUT} Fall Time | t_f | $R_L=500\Omega$ | $C_L=0.1\mu F$ | | 17 | | μs |
| | | | $C_L=1\mu F$ | | 161 | | μs |
| | | | $C_L=3.3\mu F$ | | 475 | | μs |


Note: $R_{L_Chip}=120\Omega$.

■ TEST CIRCUIT AND WAVEFORMS

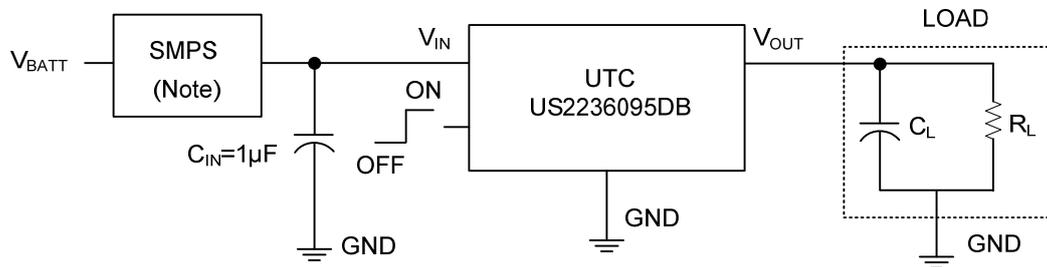

Note: Switched mode power supply

TEST CIRCUIT

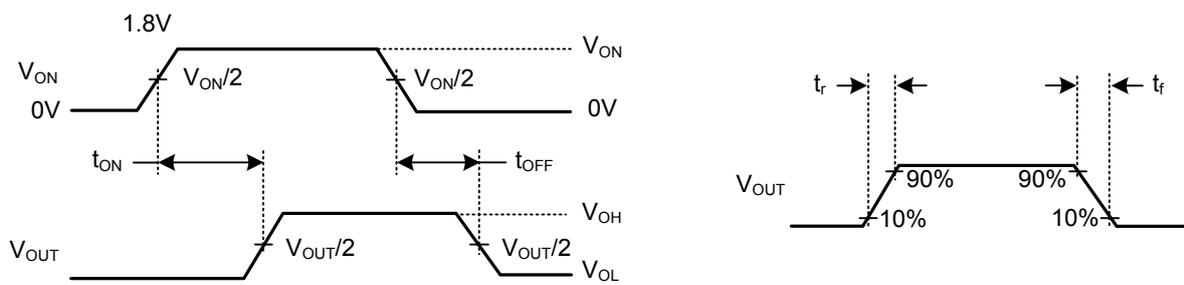

t_{ON}/t_{OFF} WAVEFORMS

■ APPLICATION INFORMATION**ON/OFF Control**

The ON pin controls the state of the switch. Activating ON continuously holds the switch in the on state so long as there is no fault. ON is active-high and has a low threshold, making it capable of interfacing with low voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2V, 1.8V, 2.5V or 3.3V GPIOs.

Input Capacitor

To limit the voltage drop on the input supply caused by transient in-rush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between V_{IN} and GND. A 1.0 μ F ceramic capacitor, C_{IN} , placed close to the pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop during high current application. When switching heavy loads, it is recommended to have an input capacitor about 10 times higher than the output capacitor, this in order to avoid excessive voltage drop.

Output Capacitor

Due to the integral body diode in the PMOS switch, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from V_{OUT} to V_{IN} .

Board Layout

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal and short-circuit operation. Using wide traces for V_{IN} , V_{OUT} , and GND helps minimize the parasitic electrical effects along with minimizing the case-to-ambient thermal impedance.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.