



LV2460/2461

CMOS IC

FAMILY OF LOW-POWER RAIL-TO-RAIL INPUT/OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

DESCRIPTION

The UTC **LV2460/2461** is a low-power rail-to-rail input/output op amplifier with low supply current (500uA) and low voltage (2.7-6V), that can be designed into a wide range of applications. The UTC **LV2460** offers a shutdown terminal, which places the amplifier in an ultralow supply current mode ($I_{CC}= 0.3\mu A$).

The UTC **LV2460/2461** have a guaranteed 1.6 V/ μs slew rate and low supply current. rail-to-rail output and high output current make the IC's ideal for buffering analog-to-digital converters. And the input common-mode voltage range includes ground and V_{CC} . Besides, they are also able to drive large capacitive loads.

Good AC performance can be provided because of 6.4MHz of bandwidth and 1.6 V/ μs of slew rate. Furthermore, low input noise voltage and low input offset voltage make good DC performance.


FEATURES

- * Rail-to-Rail Input/Output
- * Gain Bandwidth Product: 6.4 MHz
- * $\pm 48mA$ Output Drive Capability
- * Supply Current: 500 μA
- * Input Offset Voltage: 500 μV
- * Input Noise Voltage: 11nV/ \sqrt{Hz}
- * Slew Rate: 1.6V/ μs
- * Universal Operational Amplifier
- * Micropower shutdown mode (LV2460) 0.3 μA

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
LV2460L-AG6-R	LV2460G-AG6-R	SOT-26	Tape Reel
LV2461L-AF5-R	LV2461G-AF5-R	SOT-25	Tape Reel
LV2461L-AF5-R	LV2461G-AL5-R	SOT-353	Tape Reel
LV2461L-S08-R	LV2461G-S08-R	SOP-8	Tape Reel


<p>LV2460G-AG6-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) AG6: SOT-26, AF5: SOT-25, AL5: SOT-353 S08: SOP-8 (3) G: Halogen Free and Lead Free, , L: Lead Free</p>
---	---

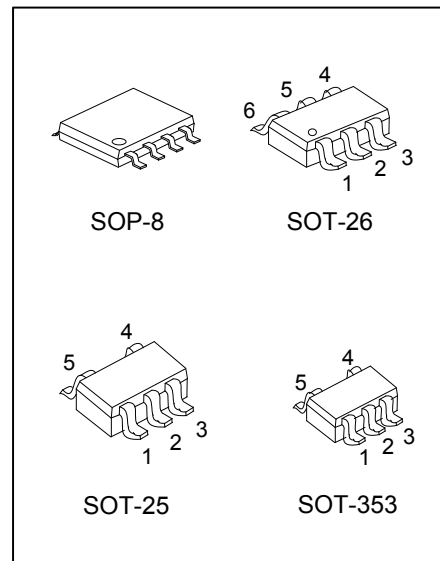

■ MARKING

PACKAGE	MARKING	
	LV2460	LV2461
SOT-26		—
SOT-25	—	
SOT-353	—	
SOP-8	—	

■ PIN CONFIGURATION

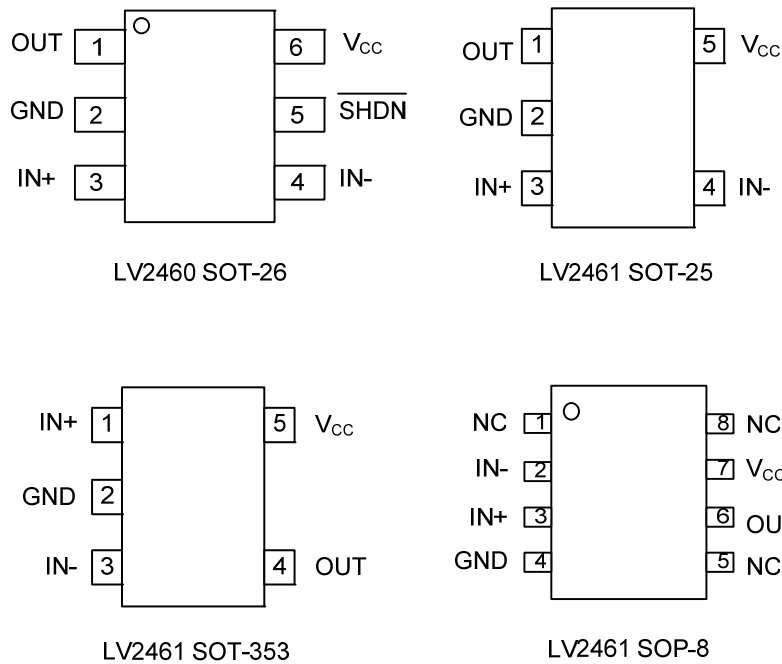


■ PIN DESCRIPTION


PIN NO.				PIN NAME	DESCRIPTION
LV2460	LV2461				
SOT-26	SOT-25	SOT-353	SOP-8		
1	1	4	6	OUT	Output
2	2	2	4	GND	Ground
3	3	1	3	IN+	Positive input
4	4	3	2	IN-	Negative input
5	-	-	-	SHDN	Shutdown
6	5	5	7	V _{CC}	Supply power
-	-	-	1, 5, 8	NC	No Connected

■ BLOCK DIAGRAM


For LV2460

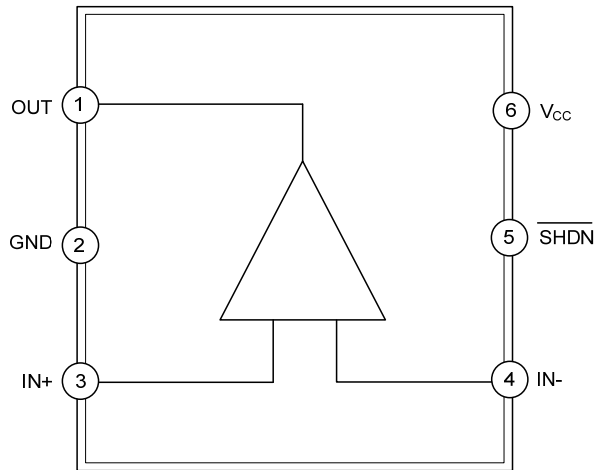


For LV2461

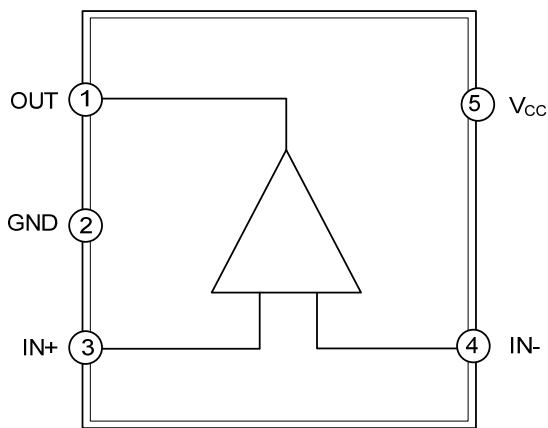

SOT-25

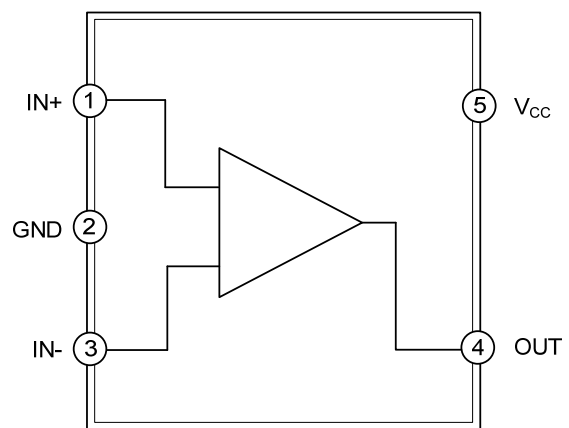


SOT-353

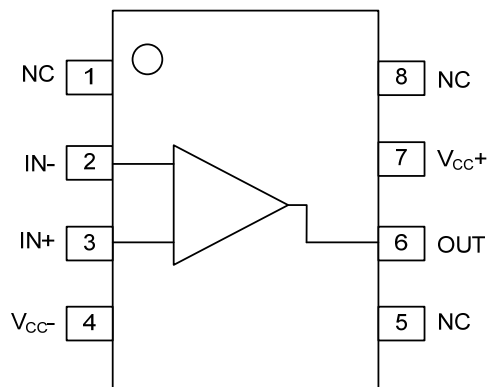


SOP-8

INTERNAL SIMPLE CIRCUIT

For LV2460

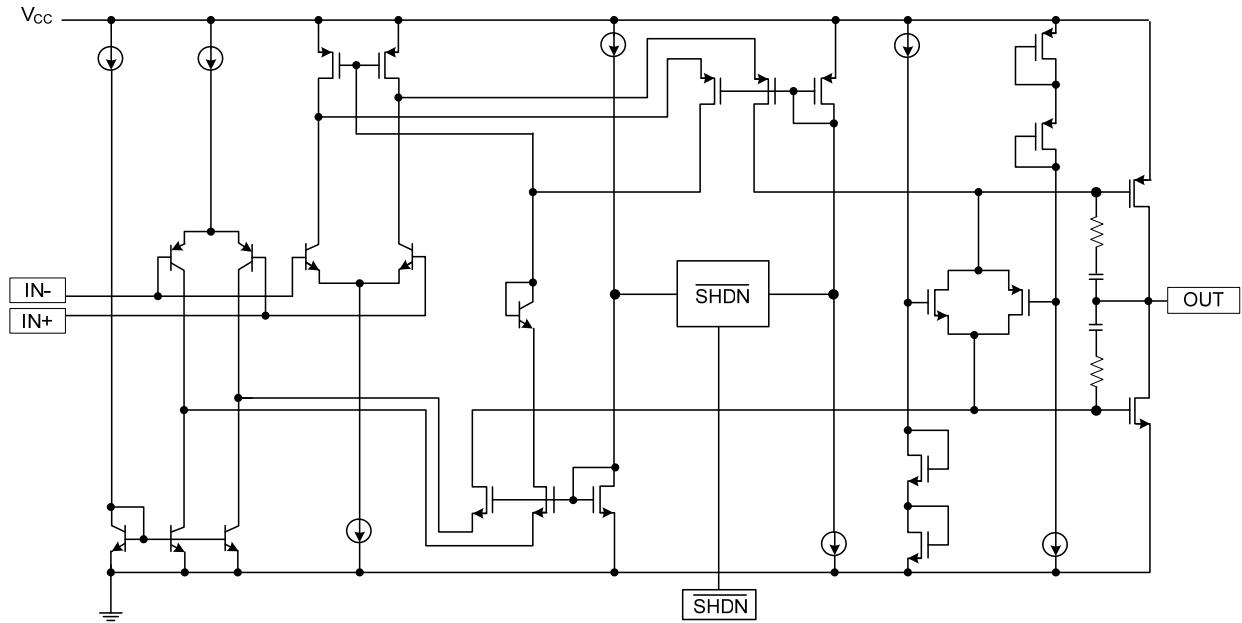

For LV2461

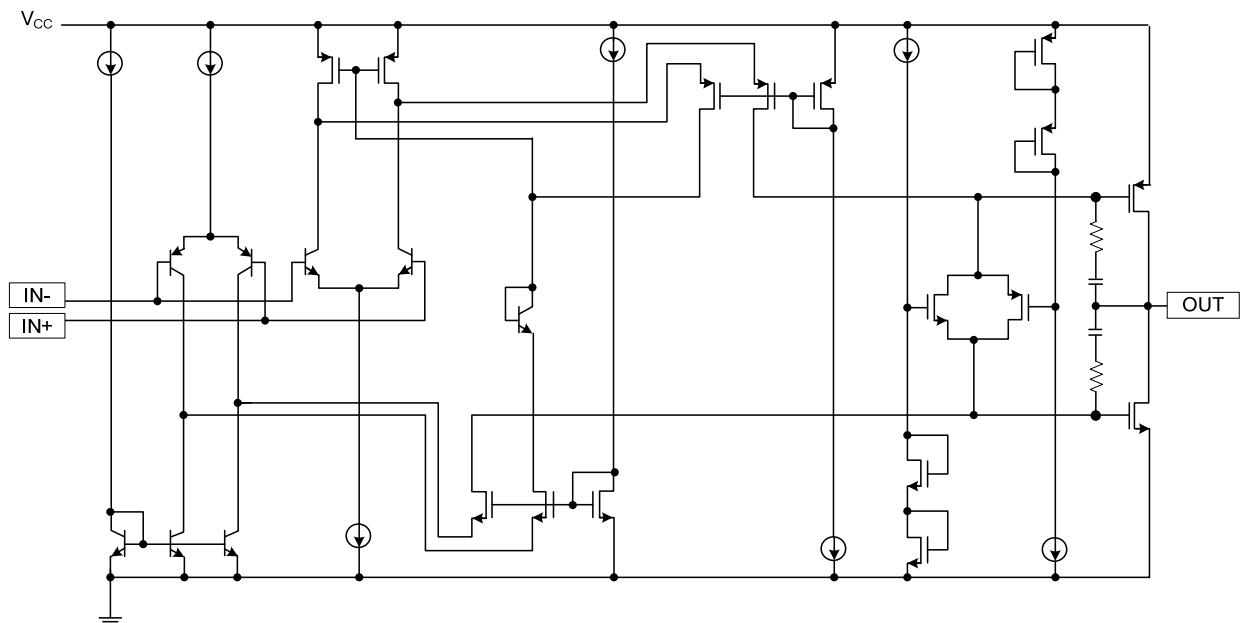

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage (Note 1)		V_{CC}	6	V
Differential Input Voltage		V_{ID}	$-0.2 \sim V_{CC}+0.2$	V
Output Current		I_O	± 175	mA
Power Dissipation	SOT-25 SOT-26	P_D	385	mW
	SOT-353		265	mW
	SOP-8		530	mW
Operating Free-Air Temperature		T_A	$-40 \sim +125$	$^{\circ}\text{C}$
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	$-60 \sim +150$	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. All voltage values, except differential voltages, are with respect to GND.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-25 SOT-26	θ_{JA}	325	$^{\circ}\text{C/W}$
	SOT-353		470	$^{\circ}\text{C/W}$
	SOP-8		235	$^{\circ}\text{C/W}$
Junction to Case	SOT-25 SOT-26	θ_{JC}	85	$^{\circ}\text{C/W}$
	SOT-353		110	$^{\circ}\text{C/W}$
	SOP-8		45	$^{\circ}\text{C/W}$

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage	Single supply	V_{CC}	$2.7 \sim 6$	V
	Split supply		$\pm 1.35 \sim \pm 3$	V
Common-Mode Input Voltage		V_{ICR}	$0 \sim V_{CC}$	V
Operating Free-Air Temperature		T_A	$-40 \sim +125$	$^{\circ}\text{C}$
Shutdown on/off voltage level (Note 1)		$V_{IH\ MIN}$	2	V
		$V_{IL\ MAX}$	0.7	V

Note: Relative to voltage on the GND terminal of the device.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

$V_{CC}=3\text{V}$


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$V_{CC}=3\text{V}$, $V_{IC}=1.5\text{V}$, $V_O=1.5\text{V}$, $R_S=50\Omega$		500	2000	μV
Input Offset Current	I_{IO}	$V_{CC}=3\text{V}$, $V_{IC}=1.5\text{V}$,		2.8	25	nA
Input Bias Current	I_{IB}	$V_O=1.5\text{V}$, $R_S=50\Omega$		4.4	50	nA
High-Level Output Voltage	V_{OH}	$I_{OH}=-2.5\text{mA}$		2.9		V
		$I_{OH}=-10\text{mA}$		2.7		V
Low-Level Output Voltage	V_{OL}	$V_{IC}=1.5\text{V}$, $I_{OL}=2.5\text{mA}$		0.1		V
		$V_{IC}=1.5\text{V}$, $I_{OL}=10\text{mA}$		0.3		V
Short-Circuit Output Current	I_{OS}	Sourcing		50		mA
		Sinking		40		mA
Output Current	I_O	Measured 1V form rail		± 40		mA
Large-Signal Differential Voltage Amplification	A_{VD}	$R_L=10\text{k}\Omega$, $V_{O(PP)}=1\text{V}$	90	105		dB
Differential Input Resistance	$r_{I(D)}$	$T_A=25^\circ\text{C}$		10^9		Ω
Common-Mode Input Capacitance	$C_{I(C)}$	$f=10\text{kHz}$, $T_A=25^\circ\text{C}$		7		pF
Closed-Loop Output Impedance	Z_O	$f=100\text{kHz}$, $A_V=10$, $T_A=25^\circ\text{C}$		33		Ω
Common-Mode Rejection Ratio	CMRR	$V_{ICR}=0\sim 3\text{V}$, $R_S=50\Omega$	66	80		dB
Supply Voltage Rejection Ratio ($\Delta V_{CC}/\Delta V_{IO}$)	k_{SVR}	$V_{CC}=2.7\sim 6\text{V}$, $V_{IC}=V_{CC}/2$, No load	75	85		dB
		$V_{CC}=3\sim 5\text{V}$, $V_{IC}=V_{CC}/2$, No load	85	95		dB
Supply Current	I_{CC}	$V_O=1.5\text{V}$, No load		0.5	0.575	mA
Supply current in shutdown(LV2460)	$I_{CC(SHDN)}$	$\text{SHDN} < 0.7\text{V}$		0.3		μA
Slew Rate at Unity Gain	SR	$V_{O(PP)}=0.8\text{V}$, $R_L=10\text{k}\Omega$, $C_L=160\text{pF}$	0.9	1.6		$\text{V}/\mu\text{s}$
Equivalent Input Noise Voltage	V_N	$f=100\text{Hz}$		16		$\text{nV}/\sqrt{\text{Hz}}$
		$f=1\text{kHz}$		11		$\sqrt{\text{Hz}}$
Equivalent Input Noise Current	I_N	$f=1\text{kHz}$		0.13		$\text{pA}/\sqrt{\text{Hz}}$
Total Harmonic Distortion Plus Noise	THD+N	$V_{O(PP)}=2\text{V}$, $R_L=10\text{k}\Omega$, $f=1\text{kHz}$	$A_V=1$	0.006		%
			$A_V=10$	0.02		%
			$A_V=100$	0.08		%
Gain-Bandwidth Product		$f=10\text{kHz}$, $C_L=160\text{pF}$, $R_L=10\text{k}\Omega$		5.2		MHz
Setting Time	t_s	$V_{(STEP)PP}=2\text{V}$, $R_L=10\text{k}\Omega$, $A_V=-1$, $C_L=10\text{pF}$	0.1%	1.47		μs
			0.01%	1.78		μs
		$V_{(STEP)PP}=2\text{V}$, $R_L=10\text{k}\Omega$, $A_V=-1$, $C_L=56\text{pF}$	0.1%	1.77		μs
			0.01%	1.98		μs
Phase Margin at Unity Gain	Φ_M	$R_L=10\text{k}\Omega$, $C_L=160\text{pF}$		44		$^\circ$
Gain Margin				7		dB

■ ELECTRICAL CHARACTERISTICS (Cont.)


V_{CC}=5V

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V _{IO}	V _{CC} =5V, V _{IC} =2.5V, V _O =2.5V, R _S =50Ω		500	2000	μV
Input Offset Current	I _{IO}	V _{CC} =5V, V _{IC} =2.5V, V _O =2.5V, R _S =50Ω		0.3	25	nA
Input Bias Current	I _{IB}			1.3	50	nA
High-Level Output Voltage	V _{OH}	I _{OH} =-2.5mA		4.9		V
		I _{OH} =-10mA		4.8		V
Low-Level Output Voltage	V _{OL}	V _{IC} =2.5V, I _{OL} =2.5mA		0.1		V
		V _{IC} =2.5V, I _{OL} =10mA		0.2		V
Short-Circuit Output Current	I _{OS}	Sourcing		145		mA
		Sinking		100		mA
Output Current	I _O	Measured 1V form rail		±48		mA
Large-Signal Differential Voltage Amplification	A _{VD}	V _{IC} =2.5V, R _L =10kΩ, V _O =1~4V	92	109		dB
Differential Input Resistance	r _{I(D)}	T _A =25°C		10 ⁹		Ω
Common-Mode Input Capacitance	C _{I(C)}	f=10kHz, T _A =25°C		7		pF
Closed-Loop Output Impedance	Z _O	f=100kHz, A _V =10, T _A =25°C		29		Ω
Common-Mode Rejection Ratio	CMRR	V _{ICR} =0~5V, R _S =50Ω	71	85		dB
Supply Voltage Rejection Ratio (ΔV _{CC} /ΔV _{IO})	k _{SVR}	V _{CC} =2.7~6V, V _{IC} =V _{CC} /2, No load	75	85		dB
		V _{CC} =3~5V, V _{IC} =V _{CC} /2, No load	85	95		dB
Supply Current	I _{CC}	V _O =2.5V, No load		0.55	0.65	mA
Supply current in shutdown(LV2460)	I _{CC(SHDN)}	SHDN < 0.7V		1		μA
Slew Rate at Unity Gain	SR		0.9	1.6		V/μs
Equivalent Input Noise Voltage	V _N	f=100Hz		14		nV/ √Hz
		f=1kHz		11		√Hz
Equivalent Input Noise Current	I _N	f=1kHz		0.13		pA/ √Hz
Total Harmonic Distortion Plus Noise	THD+N	V _{O(PP)} =4V, R _L =10kΩ, f=1kHz	A _V =1	0.004		%
			A _V =10	0.01		%
			A _V =100	0.04		%
Gain-Bandwidth Product		f=10 kHz, C _L =160pF, R _L =10kΩ		6.4		MHz
Setting Time	t _S	V _{(STEP)PP} =2V, R _L =10kΩ, A _V = -1, C _L =10pF	0.1%	1.53		μs
			0.01%	1.83		μs
		V _{(STEP)PP} =2V, R _L =10kΩ, A _V = -1, C _L =56pF	0.1%	3.13		μs
			0.01%	3.33		μs
Phase Margin at Unity Gain	Φ _M	R _L =10kΩ, C _L =160pF		45		°
Gain Margin				7		dB


■ TYPICAL APPLICATION CIRCUIT

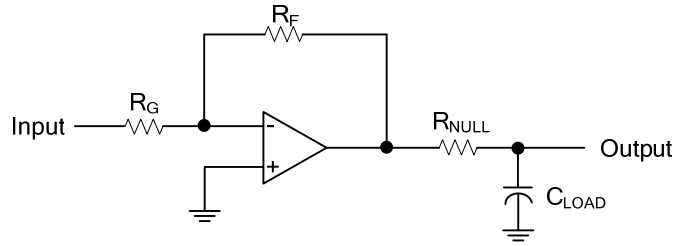

Driving A Capacitive Load

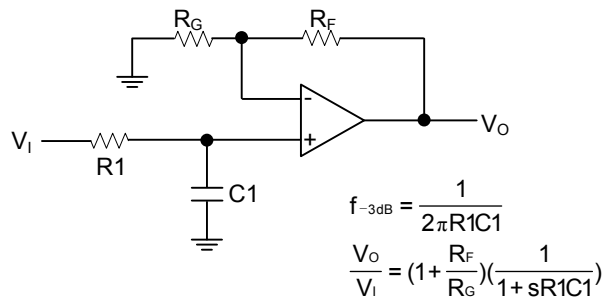

Single-Pole Low-Pass Filter

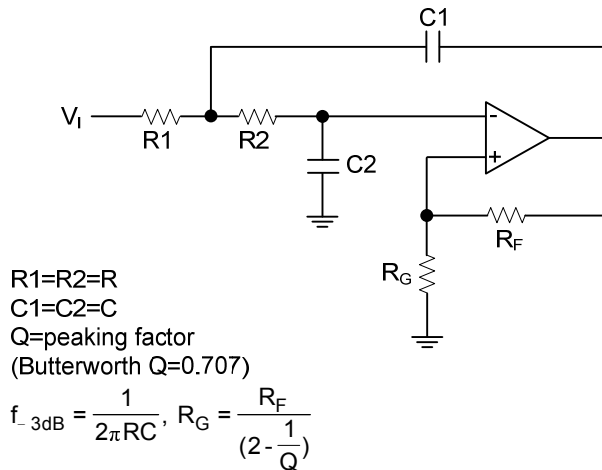

2-Pole Low-Pass Sallen-Key Filter

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.