

**UPC10XX****PHOTOCOUPLER****4 PIN PHOTOTRANSISTOR
PHOTOCOUPLER****DESCRIPTION**

The UTC **UPC10XX** is a 4 pin phototransistor photocoupler, it uses UTC's advanced technology to provide the customers with high isolation voltage between input and output, etc.

The UTC **UPC10XX** is suitable for programmable controllers and telecommunication equipments, etc.

FEATURES

Current transfer ratio (CTR : MIN. 50% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$, $T_A = 25^\circ\text{C}$)



* High input-output isolation voltage ($V_{ISO} = 5,000\text{Vrms}$)

* High collector-emitter voltage ($V_{CEO} = 70\text{V}$)

* Temperature range -55°C to 110°C

* Creepage distance > 8mm


* Employs double transfer mold technology

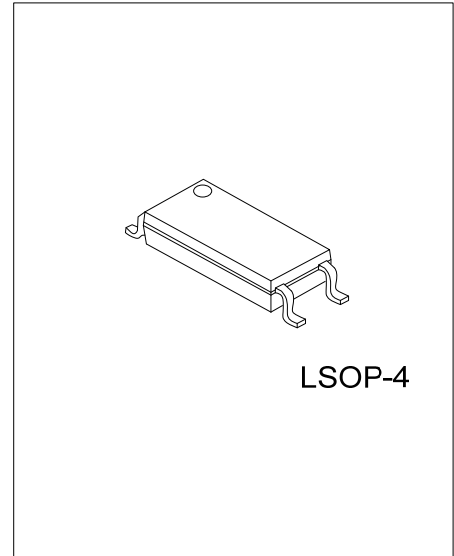**SYMBOL****ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment				Packing
Lead Free	Halogen Free		1	2	3	4	
UPC10XXL-LS04-R	UPC10XXG-LS04-R	LSOP-4	A	K	E	C	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode E: Emitter C: Collector

 UPC10XXG-LS04-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) LS04: LSOP-4
	(3)Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free
	(4)Rank	(4) Refer to TRANSFER CHARACTERISTICS

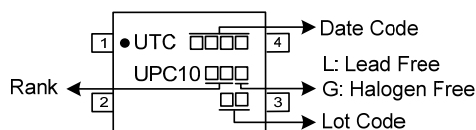MARKING

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Input	Forward Current	I_F	60	mA
	Peak Forward Current (1 μs , Pulse)	I_{FP}	1.5	A
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	100	mW
	Derating Factor		1	mW/ $^{\circ}\text{C}$
Output	Power Dissipation	P_C	150	mW
	Derating Factor		1.5	mW/ $^{\circ}\text{C}$
	Collector Current	I_C	50	mA
	Collector-Emitter Voltage	V_{CEO}	80	V
	Emitter-Collector Voltage	V_{ECO}	7	V
Total Power Dissipation		P_{TOT}	250	mW
Isolation Voltage (Note 2)		V_{ISO}	5000	V _{rms}
Operating Temperature		T_{OPR}	-55 ~ +110	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 ~ +125	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. AC for 1 minute, R.H.= 40~60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.


■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
INPUT						
Forward Voltage	V_F	$I_F=50\text{mA}$		1.3	1.4	V
		$I_F=100\text{mA}$		1.35	1.6	V
Reverse Current	I_R	$V_R=4\text{V}$			10	μA
Input Capacitance	C_{IN}	$V=0$, $f=1\text{kHz}$		50		pF
OUTPUT						
Collector-Emitter Dark Current	I_{CEO}	$V_{CE}=20\text{V}$, $I_F=0\text{mA}$			100	nA
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=1\text{mA}$, $I_F=0\text{mA}$	80			V
Emitter-Collector Breakdown Voltage	BV_{ECO}	$I_E=100\mu\text{A}$, $I_F=0\text{mA}$	7			V

■ TRANSFER CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)







PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Collector Current	I _C	I _F =5mA, V _{CE} =5V		2.5		30	mA
Current Transfer Ratio	CTR	I _F =5mA, V _{CE} =5V	UPC1000	50		600	%
			UPC1001	100		160	%
			UPC1004	100		200	%
			UPC1005	50		150	%
			UPC1006	100		300	%
			UPC1007	80		160	%
			UPC1008	130		260	%
			UPC1009	200		400	%
			UPC1010	150		300	%
			UPC1019	250		500	%
		I _F =1mA, V _{CE} =5V	UPC1002	22			%
			UPC1003	34			%
			UPC1014	56			%
			UPC1015	63		125	%
			UPC1018	100		200	%
		I _F =10mA, V _{CE} =5V	UPC1002	63		125	%
			UPC1003	100		200	%
			UPC1014	160		320	%
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _F =10mA, I _C =1mA				0.3	V
Isolation Resistance	R _{IO}	V _{IO} =500Vdc, 40~60% R.H.		1×10 ¹²			Ω
Floating Capacitance	C _{IO}	V _{IO} =0, f=1MHz			0.3		pF
Cut-Off Frequency	f _C	V _{CE} =5V, I _C =2mA, R _L =100Ω, -3dB			80		kHz
Turn-On Delay Time (Note 1)	t _{D(ON)}	V _{CE} =5V, I _C =2mA, R _L =100Ω			5		μs
Turn-Off Delay Time	t _{D(OFF)}				4.2		μs
Rise Time	t _R				3	18	μs
Fall Time	t _F				4.7	18	μs

■ TEST CIRCUITS AND WAVEFORMS



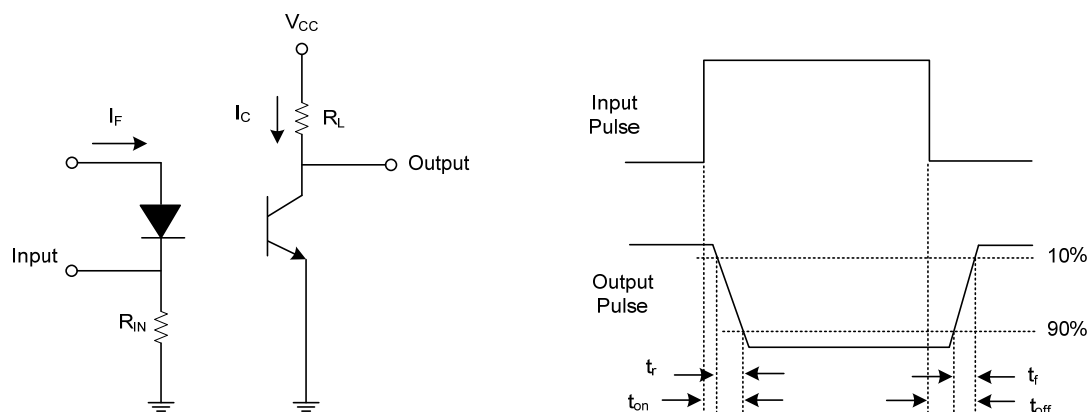


Switching Time Test Circuit & Waveforms

TYPICAL CHARACTERISTICS

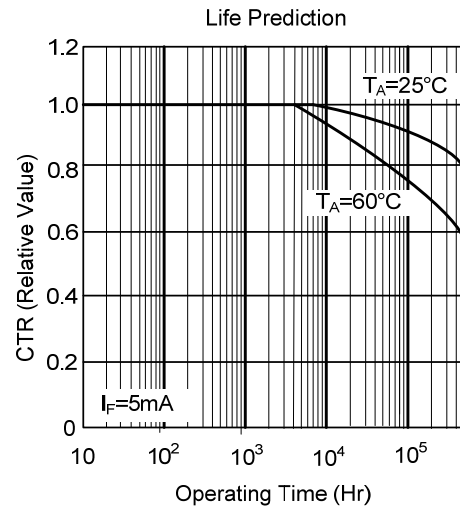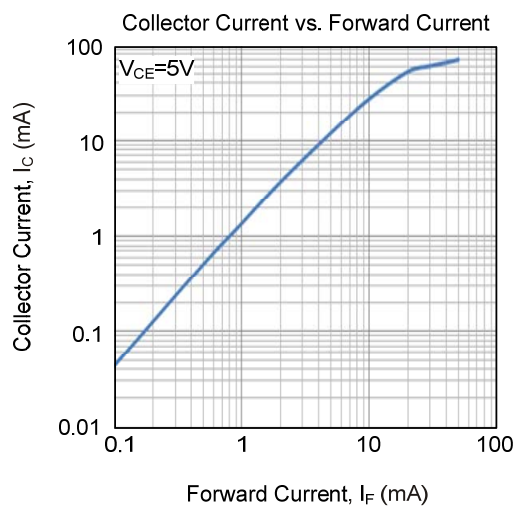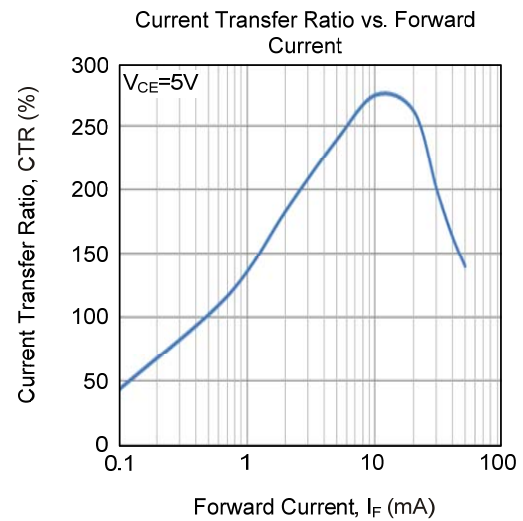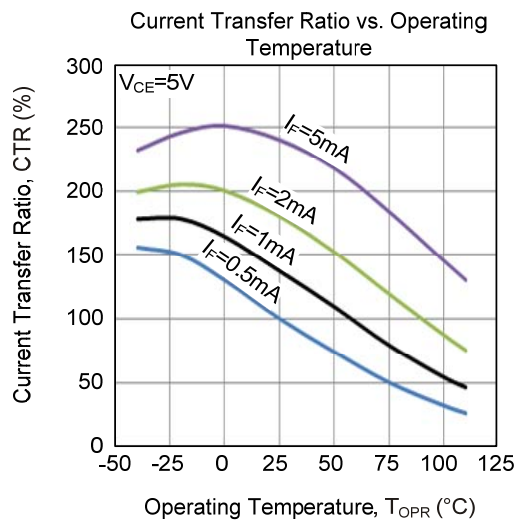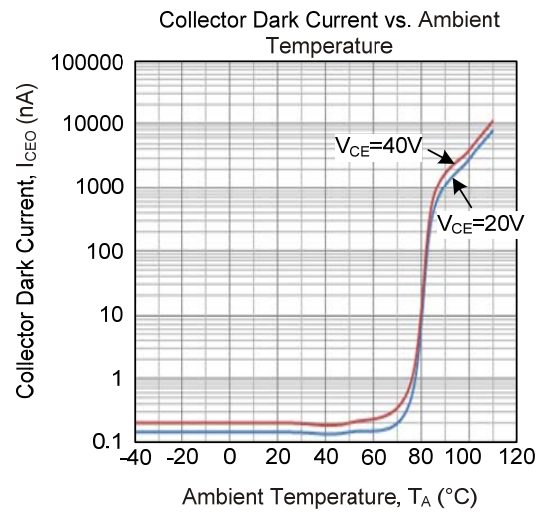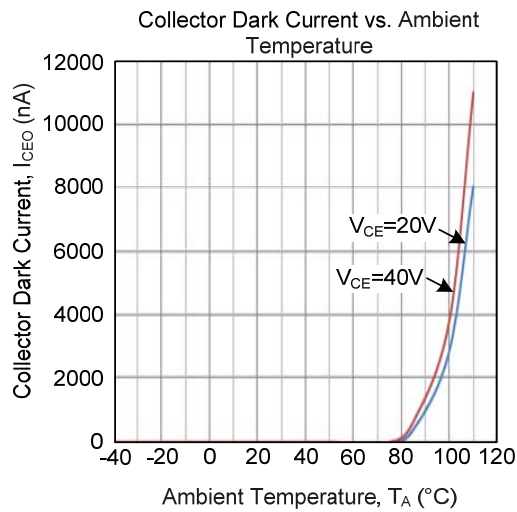

■ TYPICAL CHARACTERISTICS

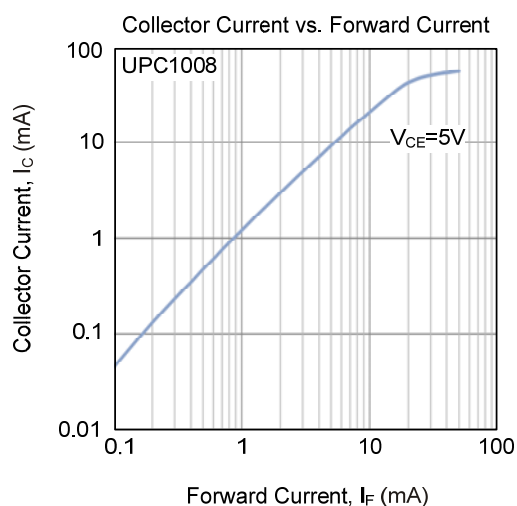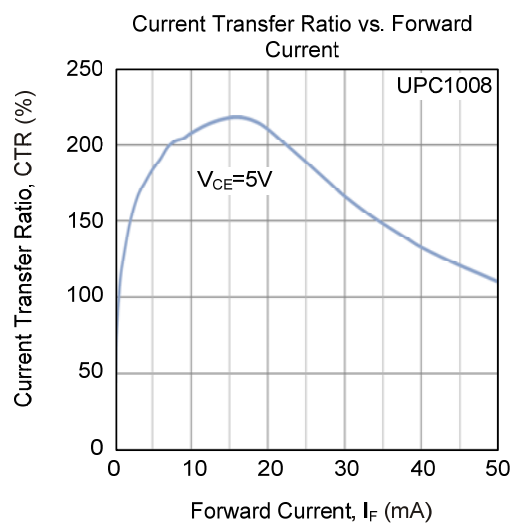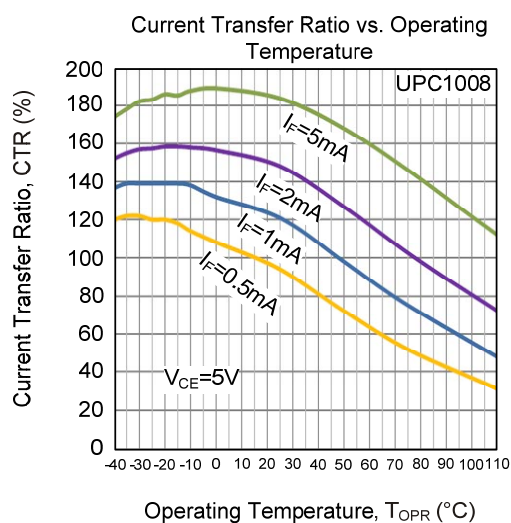

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.