



## UTR2103

Advance

LINEAR INTEGRATED CIRCUIT


### HALF-BRIDGE DRIVER

#### DESCRIPTION


The **UTR2103** is a high voltage, high speed power MOSFET and IGBT drivers with independent high- and low-side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL output, down to 3.3 V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high-side configuration which operates up to 600V.

#### FEATURES

- \* Floating channel designed for bootstrap operation
- \* Fully operational to 600V
- \* Tolerant to negative transient voltage, dV/dt immune
- \* Gate drive supply range from 10V to 20V
- \* Undervoltage lockout
- \* 3.3V, 5V, and 15V input logic compatible
- \* Cross-conduction prevention logic
- \* Internally set deadtime
- \* High-side output in phase with HIN input
- \* Low-side output out of phase with LIN input
- \* Shutdown input turns off both channels
- \* Matched propagation delay for both channels



DIP-8



SOP-8

#### ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UTR2103L-D08-T	UTR2103G-D08-T	DIP-8	Tube
UTR2103L-S08-R	UTR2103G-S08-R	SOP-8	Tape Reel

UTR2103G-D08-T


- (1) Packing Type
- (2) Package Type
- (3) Green Package

- (1) T: Tube, R: Tape Reel
- (2) D08: DIP-8, S08: SOP-8
- (3) G: Halogen Free and Lead Free, L: Lead Free

### MARKING

DIP-8	SOP-8


### PIN CONFIGURATION

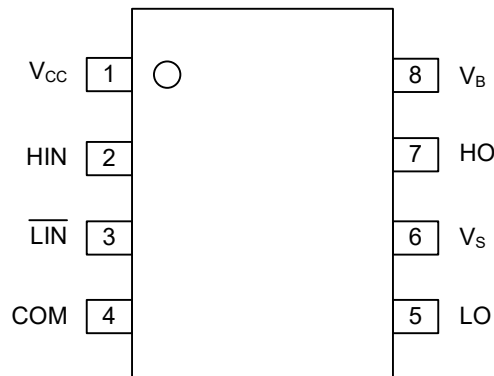

### PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V <sub>CC</sub>	Low-side and logic fixed supply
2	HIN	Logic input for high-side gate driver output (HO), in phase
3	LIN	Logic input for low-side gate driver output (LO), out of phase
4	COM	Low-side return
5	LO	Low-side gate drive output
6	V <sub>S</sub>	High-side floating supply return
7	HO	High-side gate drive output
8	V <sub>B</sub>	High-side floating supply

### ■ BLOCK DIAGRAM

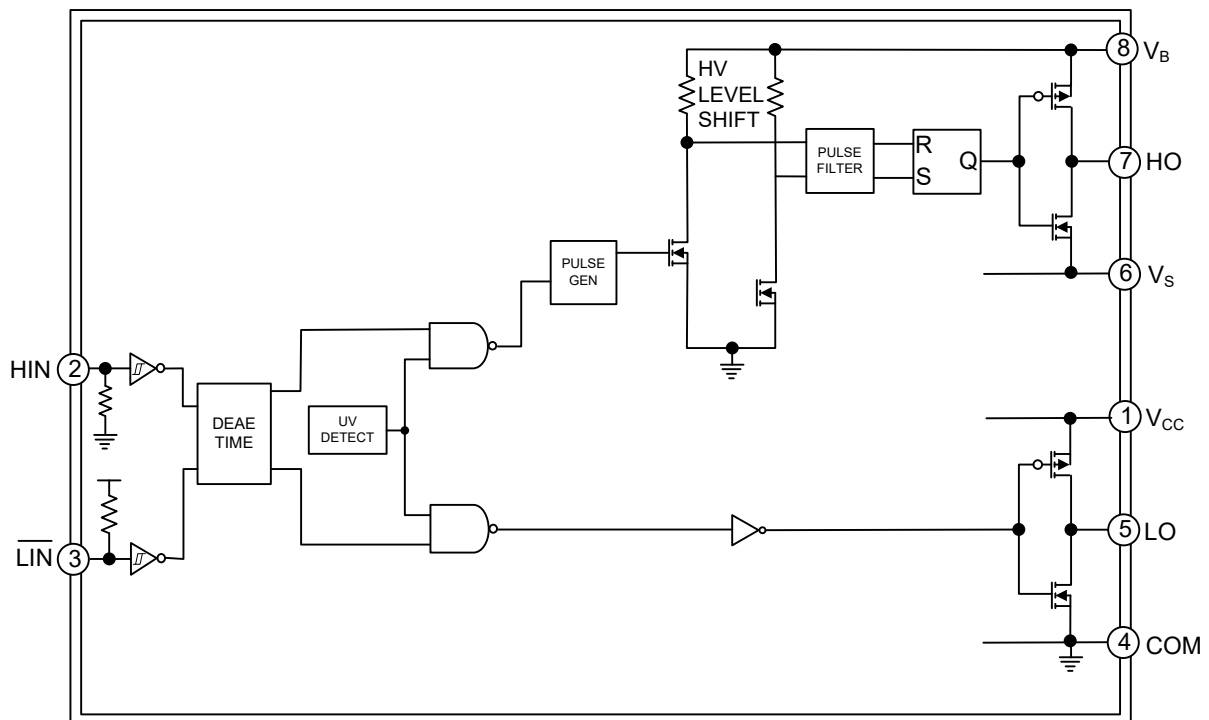

### ■ ABSOLUTE MAXIMUM RATING (T<sub>A</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
High-Side Floating Absolute Voltage	V <sub>B</sub>	-0.3 ~ 625	V
High-Side Floating Supply Offset Voltage	V <sub>S</sub>	V <sub>B</sub> -25 ~ V <sub>B</sub> +0.3	V
High-Side Floating Output Voltage	V <sub>HO</sub>	V <sub>S</sub> -0.3 ~ V <sub>S</sub> +0.3	V
Low-Side and logic Fixed Supply Voltage	V <sub>CC</sub>	-0.3 ~ 25	V
Low-Side Output Voltage	V <sub>LO</sub>	-0.3 ~ V <sub>CC</sub> +0.3	V
Logic Input Voltage (HIN & LIN)	V <sub>IN</sub>	-0.3 ~ V <sub>CC</sub> +0.3	V
Allowable Offset Supply Voltage Transient	dV <sub>S</sub> /dt	50	V/nS
Power Dissipation	DIP-8	P <sub>D</sub>	1
	SOP-8		625
Maximum Junction Temperature	T <sub>J</sub>	+150	°C
Maximum Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

### ■ RECOMMENDED OPERATING RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
High-Side Floating Absolute Voltage	V <sub>B</sub>	V <sub>S</sub> +10 ~ V <sub>S</sub> +20	V
High-Side Floating Supply Offset Voltage	V <sub>S</sub>	600 (Note)	V
High-Side Floating Output Voltage	V <sub>HO</sub>	V <sub>S</sub> ~ V <sub>B</sub>	V
Low-Side and logic Fixed Supply Voltage	V <sub>CC</sub>	10 ~ 20	V
Low-Side Output Voltage	V <sub>LO</sub>	0 ~ V <sub>CC</sub>	V
Logic Input Voltage (HIN & LIN)	V <sub>IN</sub>	0 ~ V <sub>CC</sub>	V
Ambient Temperature	T <sub>A</sub>	-40 ~ +125	°C

Note: Logic operational for V<sub>S</sub> of -5V to +600V. Logic state held for V<sub>S</sub> of -5V to -V<sub>BS</sub>..

### ■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	DIP-8	θ <sub>JA</sub>	125
	SOP-8		200

### ■ ELECTRICAL CHARACTERISTICS


[ $V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ )=15V and  $T_A=25^{\circ}C$  unless otherwise specified. The  $V_{IN}$ ,  $V_{TH}$ , and  $I_{IN}$  parameters are referenced to COM. The  $V_O$  and  $I_O$  parameters are referenced to COM and are applicable to the respective output leads: HO or LO.]

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Turn-ON Propagation Delay	$t_{ON}$	$V_S=0V$		880	980	ns
Turn-OFF Propagation Delay	$t_{OFF}$	$V_S=600V$		150	220	ns
Turn-ON Rise Time	$t_r$			70	170	ns
Turn-OFF Fall Time	$t_f$			35	90	ns
Delay matching, HS & LS Turn-ON/OFF	MT				60	ns
Deadtime, LS Turn-OFF to HS Turn-ON & HS Turn-ON to LS Turn-OFF	DT			720	850	ns
Logic "1" (HIN) & Logic "0" ( $\overline{LIN}$ ) Input Voltage	$V_{IH}$	$V_{CC}=10V\sim 20V$	2.5			V
Logic "0" (HIN) & Logic "1" ( $\overline{LIN}$ ) Input Voltage	$V_{IL}$				0.8	V
High level Output Voltage, $V_{BIAS} - V_O$	$V_{OH}$	$I_O=2mA$		0.05	0.2	V
Low Level Output Voltage, $V_O$	$V_{OL}$			0.02	0.1	V
Offset Supply Leakage Current	$I_{LK}$	$V_B=V_S=600V$			50	$\mu A$
Quiescent $V_{BS}$ Supply Current	$I_{QBS}$	$V_{IN}=0V$ or $5V$		30	55	$\mu A$
Quiescent $V_{CC}$ Supply Current	$I_{QCC}$			150	270	$\mu A$
Logic "1" Input Bias Current	$I_{IN+}$	$V_{IN}=5V$		3	10	$\mu A$
Logic "0" Input Bias Current	$I_{IN-}$	$V_{IN}=0V$			5	$\mu A$
$V_{CC}$ Supply Undervoltage Positive Going Threshold	$V_{CCUV+}$		8	8.9	9.8	V
$V_{CC}$ Supply Undervoltage Negative Going Threshold	$V_{CCUV-}$		7.4	8.2	9	V
Output High Short Circuit Pulsed Current	$I_{O+}$	$V_{IN}=0V$ , $V_O=0V$	130	290		mA
Output Low Short Circuit Pulsed Current	$I_{O-}$	$P_W \leq 10\mu s$ , $V_O=15V$	270	600		mA

### ■ TIMING DIAGRAM

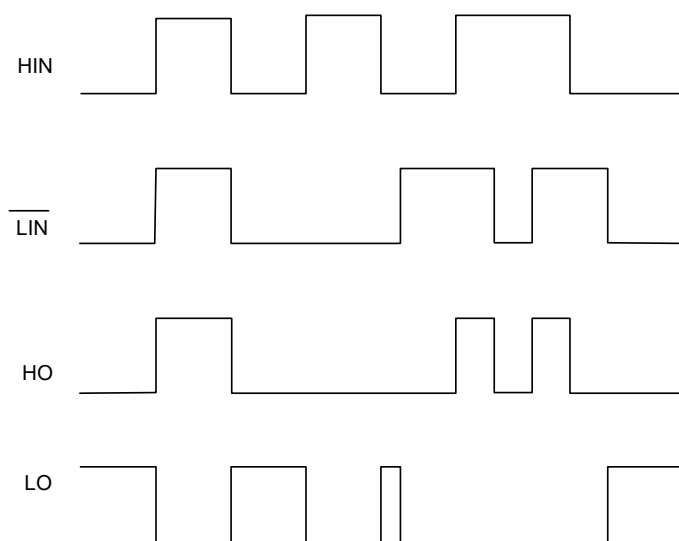

### ■ TYPICAL APPLICATION CIRCUIT

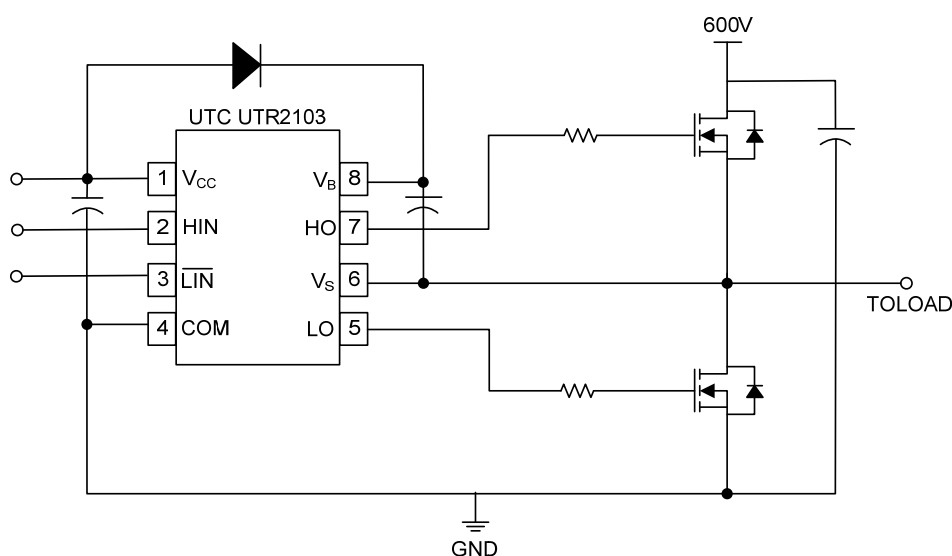

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.