



UR5513

Advance

LINEAR INTEGRATED CIRCUIT

2A DDR BUS TERMINATION REGULATOR

DESCRIPTION

The **UR5513** is a sink/source tracking termination regulator. The UR5513 possesses a high speed operating amplifier that provides fast load transient response and only requires a minimum 30uF ceramic output capacitor. The **UR5513** supports remote sensing functions and all features required to power the DDRIII and Low Power DDRIII/DDRIV VTT bus termination. In addition, the UR5513 provides an open-drain PGOOD signal to monitor the output regulation and an EN signal that can be used to discharge VTT during S3(suspend to RAM) for DDR applications.


FEATURES

- * V_{CNTL} Voltage Range: 2.9~5.5V
- * V_{IN} Voltage Range: 1.1V~3.5V
- * Support Ceramic Capacitors
- * Power Good Indicator
- * DDRIII, Low Power DDRIII/DDRIV VTT Applications
- * 2A Source/Sink VTT output
- * 10mA Source/Sink Reference output
- * Soft-start Function
- * UVLO and OCP Protection
- * Thermal Shutdown Protection


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UR5513L-SM2-R	UR5513G-SM2-R	MSOP-10	Tape Reel
UR5513L-K10-3030-R	UR5513G-K10-3030-R	DFN3030-10	Tape Reel


<p>UR5513G-SM2-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) SM2: MSOP-10, K10-3030: DFN3030-10 (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

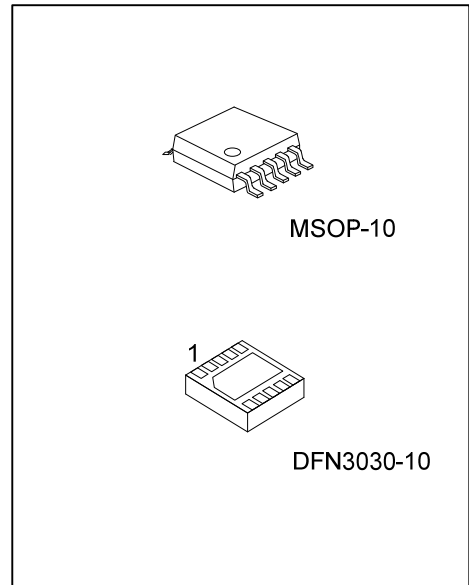

MARKING

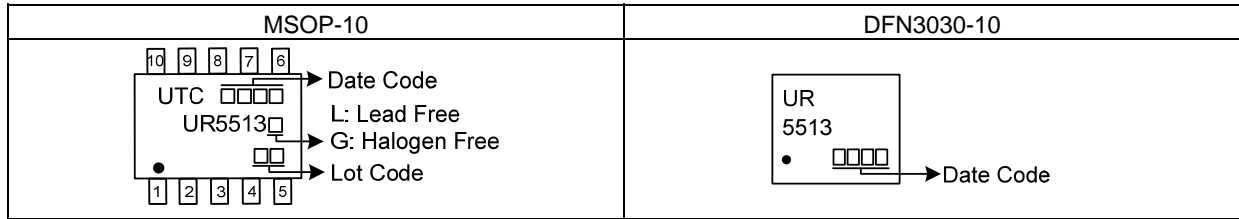


PIN CONFIGURATIONS

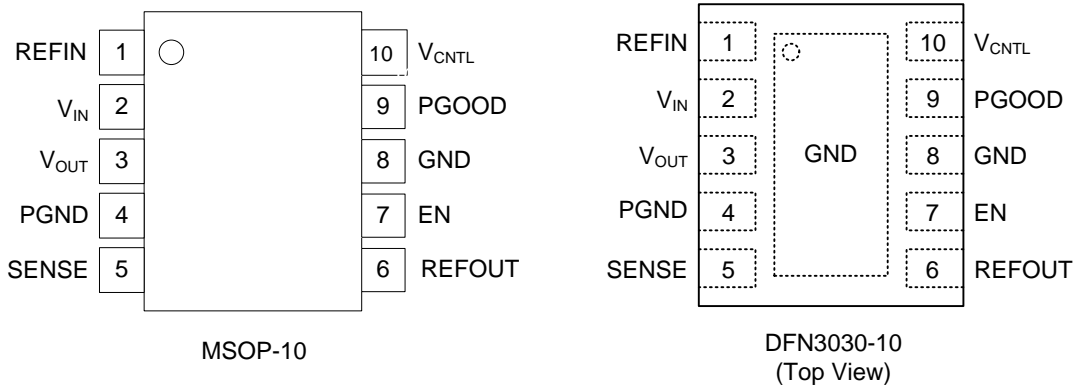

PIN DESCRIPTION

PIN No.	PIN NAME	PIN DESCRIPTION
1	REFIN	Reference input
2	V _{IN}	Power Input of VTT Regulator
3	V _{OUT}	Power Output of VTT Regulator
4	PGND	Power Ground of VTT Regulator
5	SENSE	Voltage Sense input of VTT Regulator
6	REFOUT	Reference output
7	EN	Enable control input of VTT Regulator
8	GND	Analog Ground.
9	PGOOD	Power Good open-drain output
10	V _{CNTL}	Control Voltage input
Exposed Pad	GND	Connect exposed pad to GND.

■ BLOCK DIAGRAM

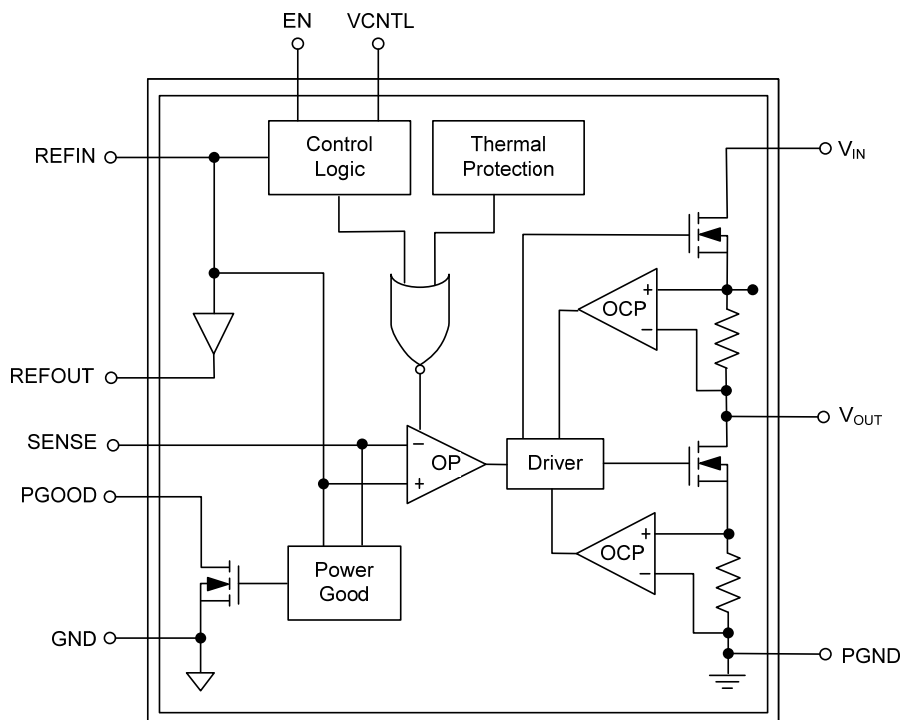

■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage (V_{IN} , V_{CNTL})		-0.3 ~ 6	V
Input Voltage (EN, REFIN, SENSE)		-0.3 ~ 6	V
OUTPUT Voltage (REFOUT, V_{OUT} , PGOOD)		-0.3 ~ 6	V
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +160	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS (Note1, 2)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Control input Voltage	V_{CNTL}	2.9		5.5	V
Supply input Voltage	V_{IN}	1.1		3.5	V
Operating Temperature	T_A	-40		+85	$^{\circ}\text{C}$

Notes: 1. All voltage values are with respect to the network ground terminal unless otherwise specified.
2. Please always keep V_{LDOIN} , V_{TTSNS} , V_{DDQSNS} , S3, S5 lower than V_{IN} on operation.

■ ELECTRICAL CHARACTERISTICS

($V_{EN}=V_{CNTL}=5\text{V}$, $V_{IN}=1.5\text{V}$, $V_{REFIN}=0.75\text{V}$, $T_A=25^{\circ}\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY CURRENT						
V_{CNTL} Supply Current	I_{CNTL}	$V_{EN}=V_{CNTL}=5\text{V}$, No load		0.7	1	mA
V_{CNTL} Shutdown Current	I_{SHDN}	$V_{EN}=V_{REFIN}=0$, No load		50	80	μA
	I_{STDBY}	$V_{EN}=0$, $V_{REFIN}>0.45\text{V}$, No load		200	400	μA
V_{IN} Supply Current	I_{VIN}	$V_{EN}=V_{CNTL}=5\text{V}$, No load		1	50	μA
V_{IN} Shutdown Current	$I_{VINSHDN}$	$V_{EN}=0$, No load		0.1	50	μA
OUTPUT						
V_{TT} Output Voltage	V_{OUT}	$V_{IN}=1.5\text{V}$, $V_{REFIN}=0.75\text{V}$, $I_{OUT}=0$		0.75		V
		$V_{IN}=1.35\text{V}$, $V_{REFIN}=0.675\text{V}$, $I_{OUT}=0$		0.675		V
		$V_{IN}=1.2\text{V}$, $V_{REFIN}=0.6\text{V}$, $I_{OUT}=0$		0.6		V
VTT Output Voltage Offset Respect to REFIN	V_{OUT-OS}	$V_{IN}=1.5\text{V}$, $V_{REFIN}=0.75\text{V}$, $ I_{OUT} =2\text{A}$	-25		25	mV
		$V_{IN}=1.35\text{V}$, $V_{REFIN}=0.675\text{V}$, $ I_{OUT} =2\text{A}$	-25		25	
		$V_{IN}=1.2\text{V}$, $V_{REFIN}=0.6\text{V}$, $ I_{OUT} =2\text{A}$	-25		25	
VOUT Source Current Limit	$I_{LIM-OUT-SR}$	VOUT in PGOOD Window	2.1	3		A
VOUT Sink Current Limit of	$I_{LIM-OUT-SK}$	VOUT in PGOOD Window	2.1	3		A
VOUT Discharge Resistance	R_{DIS}	$V_{EN}=0$, $V_{OUT}=0.3\text{V}$			25	OHM
PGOOD COMPARATOR						
PGOOD Threshold	$V_{TH-PGOOD}$	V_{SENSE} Lower Threshold	-25	-20	-15	%
		V_{SENSE} Upper Threshold	15	20	25	
		PGOOD Hysteresis		5		
PGOOD Start-up Delay	$T_{PGDelay-H}$	V_{SENSE} with-in PGOOD range		2		mS
PGOOD falling Delay	$T_{PGDelay-L}$	V_{SENSE} is out of PGOOD range		10		μS
Output Low Voltage	V_{OL-PG}	$I_{PGOOD}=4\text{mA}$			0.4	V
PGOOD Leakage Current	$I_{LEAK-PG}$	$V_{EN}=V_{CNTL}+0.3\text{V}$		0.1	3	μA

■ ELECTRICAL CHARACTERISTICS (Cont.)

($V_{EN}=V_{CNTL}=5V$, $V_{IN}=1.5V$, $V_{REFIN}=0.75V$, $T_A=25^{\circ}C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
REFIN AND REFOUT						
REFIN Voltage range	V_{REFIN}		0.5		1.8	V
REFIN input Current	I_{REFIN}	$V_{EN}=V_{CNTL}$			1	μA
REFIN Under-Voltage Lockout	$V_{UVLO-REF}$	REFIN Rising		390	420	mV
		Hysteresis		20		
REFOUT Voltage tolerance	$V_{TOL-REF}$	REFIN=0.75V, $ I_{REFOUT} =0\sim 10mA$	-15		15	mV
		REFIN=0.675V, $ I_{REFOUT} =0\sim 10mA$	-15		15	
		REFIN=0.6V, $ I_{REFOUT} =0\sim 10mA$	-15		15	
REFOUT Source Current limit	$I_{LIM-REFO-SR}$	$V_{REFOUT}=0$	10	50		mA
REFOUT Sink Current limit	$I_{LIM-REFO-SK}$	$V_{REFOUT}=REFIN+1V$	10	50		
UVLO/EN						
V_{CNTL} UVLO Threshold	$V_{UVLO-CNTL}$	Rising		2.6	2.9	V
		Hysteresis		120		mV
EN Input Logic High	V_{IH-EN}		1.7			V
EN Input Logic Low	V_{IL-EN}				0.3	
Thermal SHUTDOWN						
Thermal Shutdown Threshold	T_{SD}	Shutdown Temperature		160		$^{\circ}C$
		Hysteresis		20		

■ TYPICAL APPLICATIONS CIRCUIT

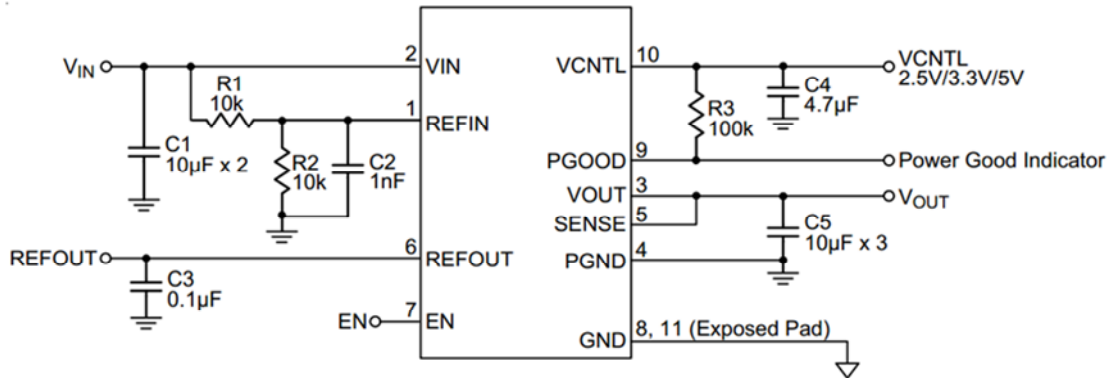

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.