



UFR20120

FAST RECOVERY EPITAXIAL DIODE

SUPERFAST RECOVERY RECTIFIER

DESCRIPTION

The UTC **UFR20120** is a superfast recovery rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop, low leakage, high current capability and high surge capability etc. These characteristics make it ideal for heavy duty applications that demand long term reliability. also fit into auxiliary functions such as snubber, bootstrap, and demagnetization applications.

FEATURES

- * Ultrafast, soft recovery
- * Very low conduction and switching losses
- * High frequency and or high pulsed current operation
- * High reverse voltage capability
- * High junction temperature

SYMBOL





ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
UFR20120L-TA2-T	UFR20120G-TA2-T	TO-220-2	K	A	Tube

Note: Pin Assignment: A: Anode K: Cathode

UFR20120G-TA2-T	(1)Packing Type	(1) T: Tube
	(2)Package Type	(2) TA2: TO-220-2
	(3)Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

MARKING

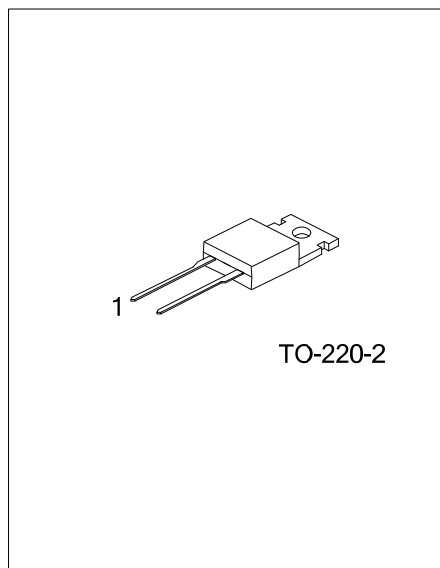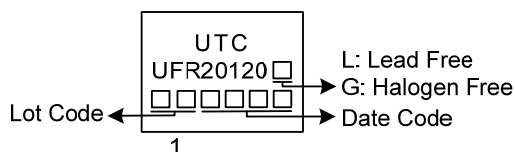

TO-220-2

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

PARAMETER		SYMBOL	RATINGS	UNIT
Repetitive Peak Reverse Voltage		V_{RRM}	1200	V
Average forward current, $\delta=0.5\%$	$T_C=105^{\circ}\text{C}$	$I_{F(AV)}$	20	A
Surge non repetitive forward current	$t_p=10\text{ms}$ Sinusoidal	I_{FSM}	160	A
Operating Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	θ_{JC}	2	$^{\circ}\text{C/W}$

■ ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz



PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward voltage drop (Note 1)	V_F	$I_F=20\text{A}$			2.0	V
					1.8	V
Maximum Reverse Leakage Current (Note 2)	I_R	$V_R=V_{RRM}$			10	μA
					1	mA
Reverse recovery time	t_{rr}	$I_F=1.0\text{A}, V_R=30\text{V}, dI_F/dt=100\text{A}/\mu\text{s}, T_J=25^{\circ}\text{C}$		42		ns
		$I_F=20.0\text{A}, V_R=400\text{V}, dI_F/dt=200\text{A}/\mu\text{s}, T_J=25^{\circ}\text{C}$		160		ns
Reverse Recovery Charge	Q_{rr}	$I_F=20.0\text{A}, V_R=400\text{V}, dI_F/dt=200\text{A}/\mu\text{s}, T_J=25^{\circ}\text{C}$		800		nC

Notes: 1. Pulse test: $t_p = 5\text{ ms}$, $\delta = 2\%$.

2. Pulse test: $t_p = 380\text{ ms}$, $\delta = 2\%$.

3. To evaluate the conduction losses use the following equation: $P=1.5 \times I_{F(AV)} + 0.08 I_F^2 (\text{RMS})$.

■ TYPICAL CHARACTERISTICS

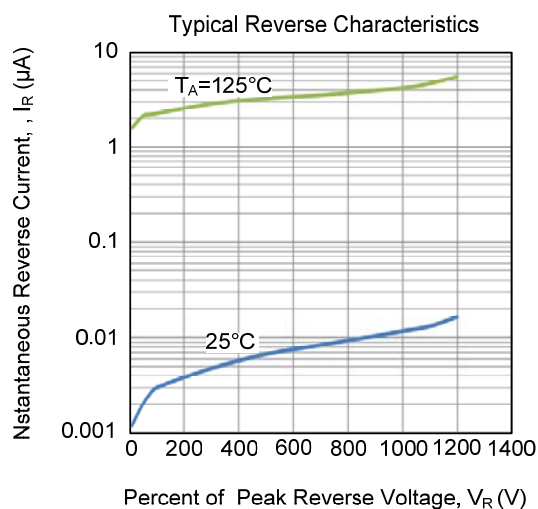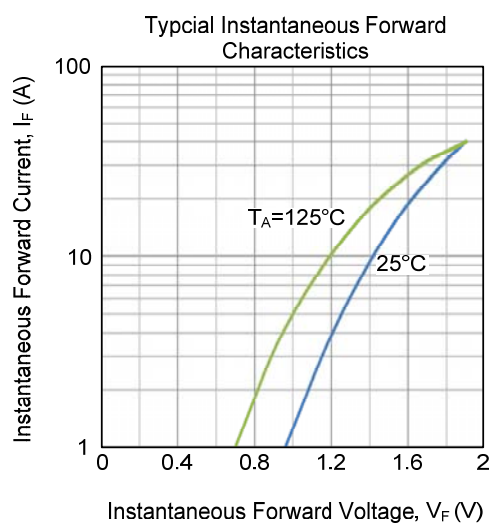

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.