

**UT2027**


Preliminary

POWER MOSFET**10.5A, 20V N-CHANNEL
ENHANCEMENT MODE
MOSFET****■ DESCRIPTION**


The UTC **UT2027** is a N-channel Power MOSFET, designed to minimize the on-state resistance ($R_{DS(ON)}$), yet maintain superior switching performance, making it ideal for high-efficiency power management applications.

■ FEATURES

- * $R_{DS(ON)} \leq 12 \text{ m}\Omega$ @ $V_{GS}=4.5\text{V}$, $I_D=9.4\text{A}$
- * $R_{DS(ON)} \leq 19 \text{ m}\Omega$ @ $V_{GS}=2.5\text{V}$, $I_D=8.3\text{A}$
- * Low $R_{DS(ON)}$ – Ensures On-State Losses Are Minimized




SOP-8

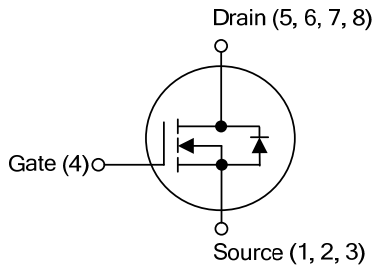■ SYMBOL**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UT2027L-S08-R	UT2027G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT2027G-S08-R		(1) Packing Type	(1) R: Tape Reel
		(2) Package Type	(2) S08: SOP-8
		(3) Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

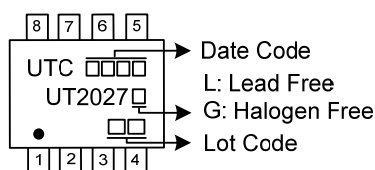■ MARKING

■ ABSOLUTE MAXIMUM RATING (T_C=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V _{DSS}	20	V
Gate-Source Voltage		V _{GSS}	±12	V
Drain Current	Continuous	I _D	10.5	A
	Pulsed (Note 2)	I _{DM}	21	A
Avalanche Energy	Single Pulsed (Note 3)	E _{AS}	100	mJ
Power Dissipation		P _D	1.6	W
Junction Temperature		T _J	+150	°C
Storage Temperature Range		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L = 1mH, I_{AS} = 14.1A, V_{DD} = 50V, R_G = 25Ω, Starting T_J = 25°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ _{JA}	90	°C/W
Junction to Case	θ _{JC}	78	°C/W

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.

■ ELECTRICAL CHARACTERISTICS (T_J=25°C, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	20			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =20V, V _{GS} =0V			1	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+12V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-12V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	0.5		1.5	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =4.5V, I _D =9.4A			12	mΩ
			V _{GS} =2.5V, I _D =8.3A			19	mΩ
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =10V, f=1.0MHz		911		pF
Output Capacitance		C _{OSS}			287		pF
Reverse Transfer Capacitance		C _{RSS}			252		pF
SWITCHING PARAMETERS							
Total Gate Charge (Note 1)		Q _G	V _{DS} =16V, V _{GS} =10V, I _D =10.5A, (Note 1, 2)		38		nC
Gate to Source Charge		Q _{GS}			1		nC
Gate to Drain Charge		Q _{GD}			10		nC
Turn-on Delay Time (Note 1)		t _{D(ON)}	V _{DD} =10V, V _{GS} =10V, I _D =10.5A, R _G =3Ω (Note 1, 2)		7		ns
Rise Time		t _R			15		ns
Turn-off Delay Time		t _{D(OFF)}			26		ns
Fall-Time		t _F			22		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				10.5	A
Maximum Body-Diode Pulsed Current		I _{SM}				21	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =1A, V _{GS} =0V			1.4	V

Notes: 1. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%.

2. Essentially independent of operating ambient temperature.

D.U.T.

V_{DS}

I_{SD}

L

R_G

Driver

V_{GS}

Same Type as D.U.T.


V_{DD}

- * dv/dt controlled by R_G
- * I_{SD} controlled by pulse period
- * D.U.T.-Device Under Test


3 of 5
QW-R502-D322.a

■ TEST CIRCUITS AND WAVEFORMS


Gate Charge Test Circuit

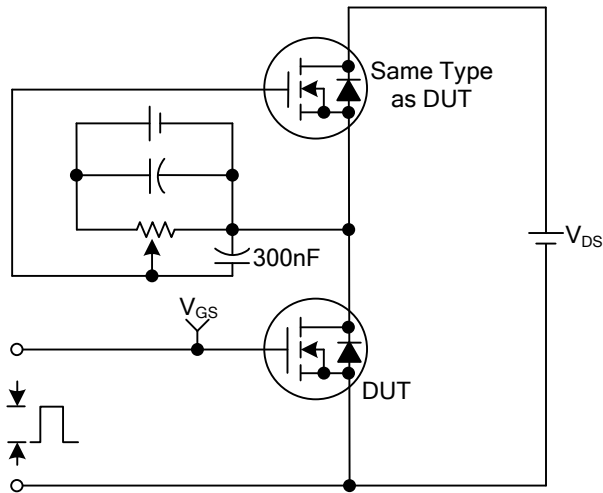


Gate Charge Waveforms

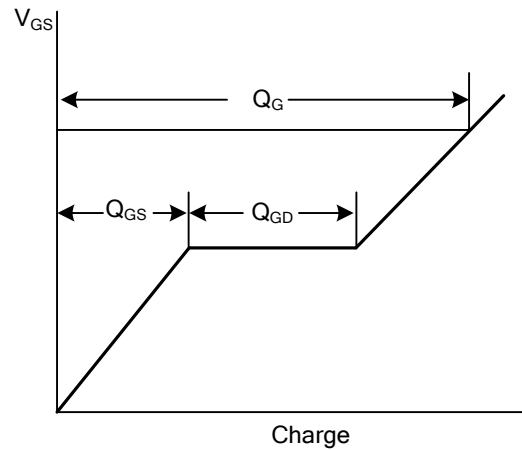


Resistive Switching Test Circuit

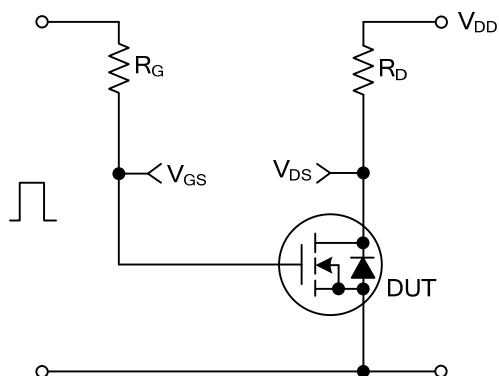


Resistive Switching Waveforms

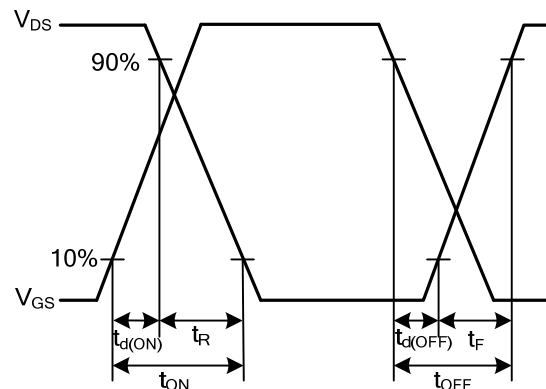

Unclamped Inductive Switching Test Circuit

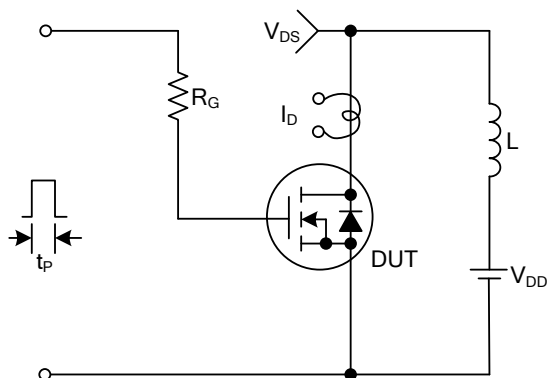

Unclamped Inductive Switching Waveforms

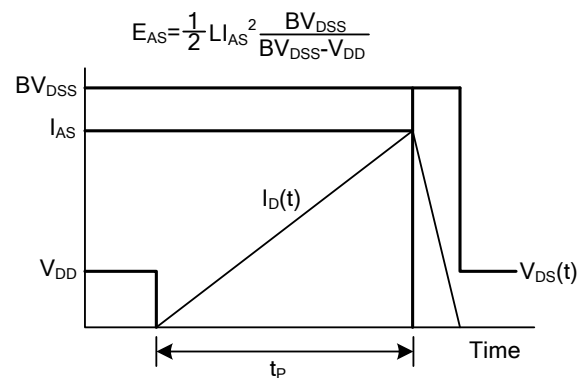

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.