



## SF31P THRU SF38P

## SCHOTTKY BRIDGE


### 3.0A SUPER FAST RECTIFIERS

#### DESCRIPTION


The UTC **SF31P THRU SF38P** is a glass passivated super fast rectifier, it uses UTC's advanced technology to provide customers with high surge current and low forward voltage drop, etc

#### FEATURES

- \* Super fast speed switching speed
- \* Low forward voltage drop
- \* Low leakage current
- \* Designed for Surface Mount Application
- \* High forward surge capability
- \* High reliability

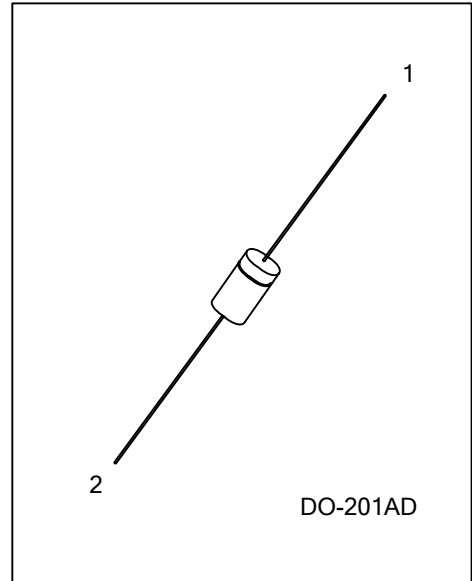

#### SYMBOL




#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SF3XPL-Z21D-B	SF3XPG-Z21D-B	DO-201AD	K	A	Tape Box

Note: Pin Assignment: K: Cathode A: Anode

<p>SF3XPG-Z21D-B</p> <ul style="list-style-type: none"><li>(1) Packing Type</li><li>(2) Package Type</li><li>(3) Green Package</li><li>(4) Product Code</li></ul>	<ul style="list-style-type: none"><li>(1) B: Tape Box</li><li>(2) Z21D: DO-201AD</li><li>(3) G: Halogen Free and Lead Free, L: Lead Free</li><li>(4) X: refer to ABSOLUTE MAXIMUM RATINGS</li></ul>
---	---

#### MARKING

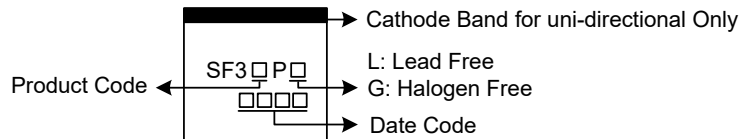

■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS							UNIT
		SF31P	SF32P	SF33P	SF34P	SF35P	SF36P	SF38P	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current	$I_O$	3.0							A
Peak Forward surge current 8.3ms single half-sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$	125							A
Operating Junction Temperature Range	$T_J$	$-55 \sim +125$							$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	$-55 \sim +125$							$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Mounted on glass epoxy pc board with  $1.3\text{mm}^2$  solder pad.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	20	$^{\circ}\text{C}/\text{W}$

Note: Thermal resistance from junction to ambient  $0.375''(9.5\text{mm})$  lead length P.C.B. mounted.

■ ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$  unless otherwise specified)

Ratings at  $25^{\circ}\text{C}$  ambient temperature unless otherwise specified.






Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	TEST CONDITIONS	RATINGS						UNIT
			SF31P	SF32P	SF33P	SF34P	SF35P	SF36P	
Maximum Forward Voltage	$V_F$	$I_F=3.0\text{A}$	0.95				1.25	1.70	V
Maximum Reverse Current at Rated DC Blocking Voltage	$I_R$	$T_A=25^{\circ}\text{C}$	5.0						$\mu\text{A}$
		$T_A=100^{\circ}\text{C}$	100						$\mu\text{A}$
Typical Junction Capacitance (Note 1)	$t_{rr}$		35						ns
Junction Capacitance (Note 2)	$C_J$		50				30		pF

Notes: 1. Reverse recovery test conditions  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$ .

2. Measured at 1MHZ and applied reverse voltage of  $4.0 V_{DC}$ .

### ■ TYPICAL CHARACTERISTICS

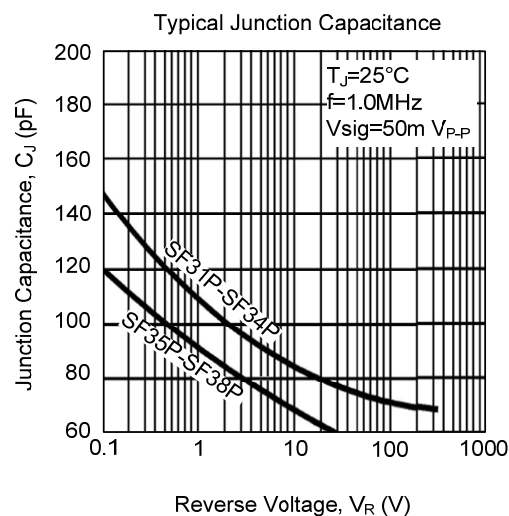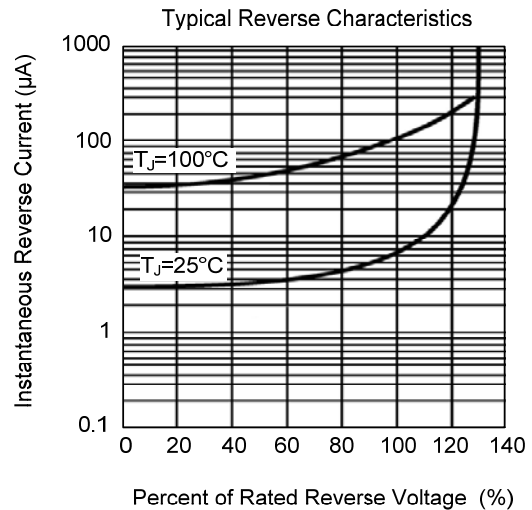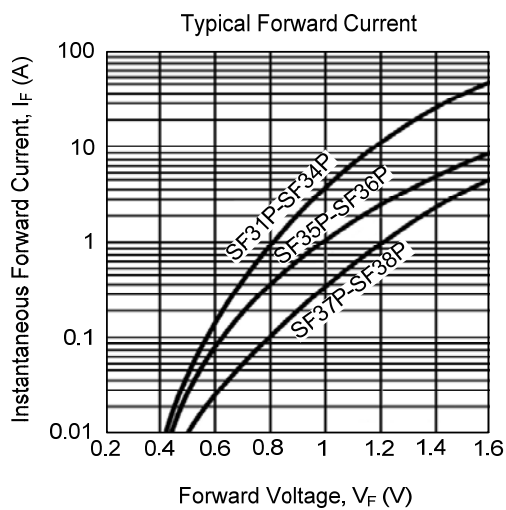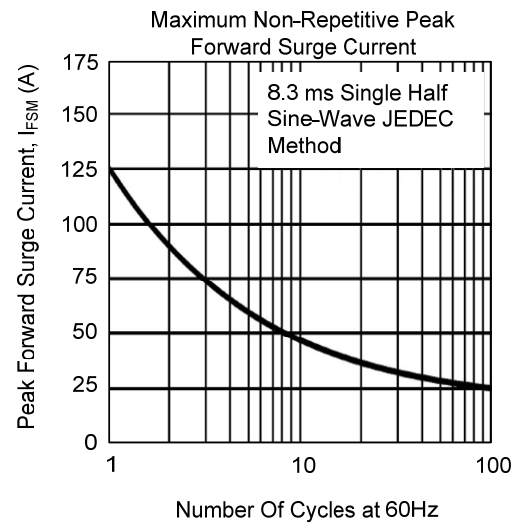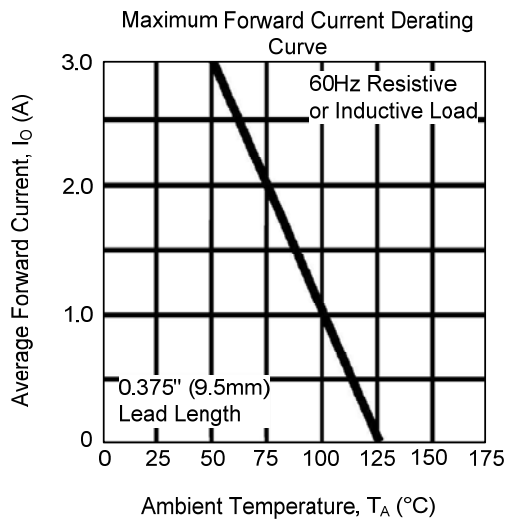

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.