

**UTG40N65LLS3**

Preliminary


*Insulated Gate Bipolar Transistor***650V TRENCH GATE
FIELD-STOP IGBT****DESCRIPTION**

The UTC **UTG40N65LLS3** is an Trench Field-Stop Insulated Gate Bipolar Transistor. it uses UTC's advanced technology to provide customers with high switching speed, low saturation voltage and low switching loss, etc.

The UTC **UTG40N65LLS3** is suitable for the resonant or soft switching applications.

FEATURES


- * High switching speed
- * High avalanche ruggedness
- * Low saturation voltage: $V_{CE(SAT), Typ.} = 1.34V @ I_C=40A, V_{GE}=15V$ ($T_C = 25^\circ C$)

SYMBOL**ORDERING INFORMATION**


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTG40N65LLS3L-T47-T	UTG40N65LLS3G-T47-T	TO-247	G	C	E	Tube
UTG40N65LLS3L-T3P-T	UTG40N65LLS3G-T3P-T	TO-3P	G	C	E	Tube
UTG40N65LLS3L-T3N-T	UTG40N65LLS3G-T3N-T	TO-3PN	G	C	E	Tube
UTG40N65LLS3L-TQ2-T	UTG40N65LLS3G-TQ2-T	TO-263	G	C	E	Tube
UTG40N65LLS3L-TQ2-R	UTG40N65LLS3G-TQ2-R	TO-263	G	C	E	Tape Reel

Note: Pin Assignment: G: Gate C: Collector E: Emitter

UTG40N65LLS3G-T47-T	(1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube (2) T47: TO-247, T3P: TO-3P, T3N: TO-3PN TQ2: TO-263 (3) G: Halogen Free and Lead Free, L: Lead Free
---------------------	---	---

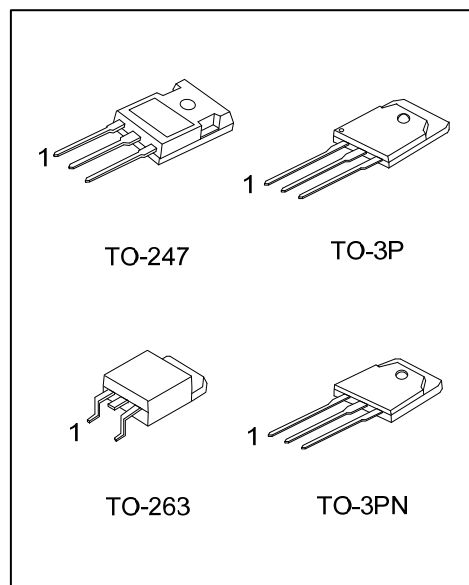

■ MARKING

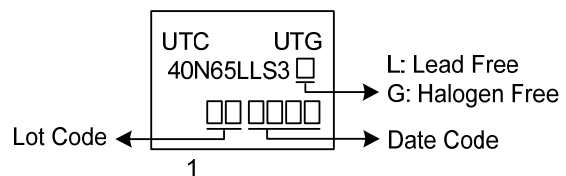

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage		V _{CES}	650	V
Gate-Emitter Voltage		V _{GES}	±20	V
Transient Gate-Emitter Voltage (t _p < 5 ms)			±25	V
Continuous Collector Current	T _C =25°C	I _C	80	A
	T _C =100°C		40	A
Collector Current Pulsed (Note 1)		I _{CM}	160	A
Diode Forward Current	T _C =25°C	I _F	80	A
	T _C =100°C		40	A
Short Circuit Withstand Time V _{GE} = 15V, V _{CC} ≤ 200V Allowed number of short circuits < 1000 Time between short circuits: ≥ 1.0s T _{VJ} = 25°C		t _{sc}	8	μs
Power Dissipation (T _C =25°C)	TO-247	P _D	298	W
	TO-263		109	W
	TO-3P/TO-3PN		320	W
Operating Junction Temperature		T _J	-40 ~ +150	°C
Storage Temperature Range		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Absolute maximum ratings are those values beyond which the device could be permanently damaged.

2. Pulse width limited by maximum junction temperature.

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Case	TO-247	θ _{JC}	0.41	°C/W
	TO-263		1.15	°C/W
	TO-3P/TO-3PN		0.39	°C/W

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Off Characteristics						
Collector-Emitter Breakdown Voltage	BV _{CES}		650			V
Collector Cut-Off Current	I _{CES}	V _{CE} =650V, V _{GE} =0V			5	μA
G-E Leakage Current	I _{GES}	V _{CE} =0V, V _{GE} =±20V			±400	nA
On Characteristics						
Gate to Emitter Threshold Voltage	V _{GE(TH)}	I _C =250μA, V _{CE} =V _{GE}	4.0		7.0	V
Collector to Emitter Saturation Voltage	V _{CE(SAT)}	I _C =40A, V _{GE} =15V	T _C =25°C	1.34	1.9	V
			T _C =125°C	1.53		V
Dynamic Characteristics						
Input Capacitance	C _{IES}	V _{CE} =25V, V _{GE} =0V, f=1MHz		2660		pF
Output Capacitance	C _{OES}			159		pF
Reverse Transfer Capacitance	C _{RES}			41		pF
Switching Characteristics						
Total Gate Charge	Q _G	V _{CE} =520V, I _C =40A, V _{GE} =15V		123		nC
Gate-Emitter Charge	Q _{GE}			29		nC
Gate-Collector Charge	Q _{GC}			60		nC
Turn-On Delay Time	t _{DON}	V _{CC} =400V, I _C =40A, R _G =5Ω, V _{GE} =0~15V, L=500μH		16		ns
Rise Time	t _R			37		ns
Turn-Off Delay Time	t _{DOFF}			96		ns
Fall Time	t _F			114		ns
Turn-On Switching Loss	E _{ON}			1.69		mJ
Turn-Off Switching Loss	E _{OFF}			1.19		mJ
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Forward Voltage Drop	V _F	I _F =40A			2.5	V
Reverse Recovery Time	t _{rr}	I _F =40A, dI/dt=100A/μS, V _{CC} =400V		81		ns
Reverse Recovery Charge	Q _{rr}			1388		nC

■ TEST CIRCUIT AND WAVEFORMS

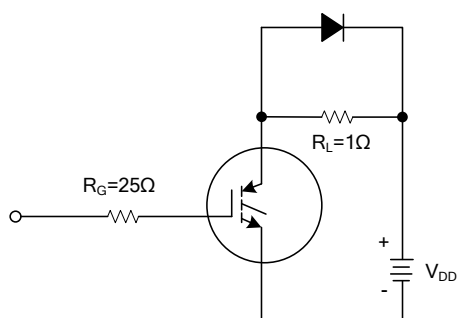


Fig 1. INDUCTIVE SWITCHING TEST CIRCUIT

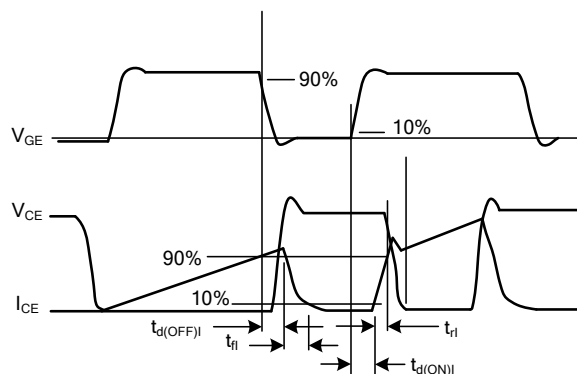


Fig 2. SWITCHING TEST WAVEFORMS

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.