



UM393

LINEAR INTEGRATED CIRCUIT


DUAL DIFFERENTIAL COMPARATOR

DESCRIPTION

The UTC **UM393** consists of two independent voltage comparators, designed specifically to operate from a single power supply over a wide voltage range.

FEATURES

- * Single or dual supply operation
- * Wide operating supply range
($V_{CC}=2V \sim 36V$ or $\pm 1 \sim \pm 18V$)
- * Input common-mode voltage includes ground
- * Low supply current drain $I_{CC}=0.6mA$ (Typical)
- * Open Collector Outputs for Wired and Connection
- * Low Output Saturation Voltage
- * Output compatible with TTL, DTL, and CMOS logic system
- * High ESD (2kV, HBM)



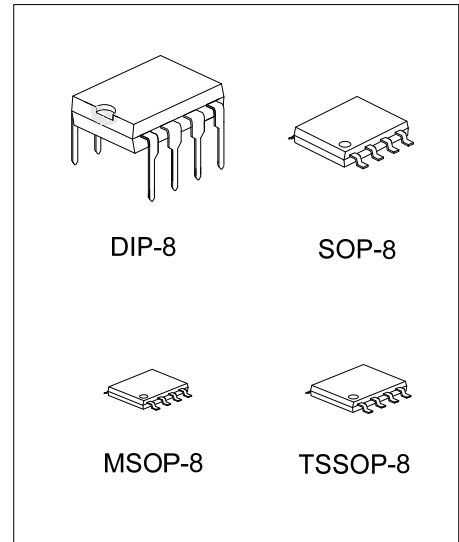


ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen-Free		
UM393L-D08-T	UM393G-D08-T	DIP-8	Tube
UM393L-S08-R	UM393G-S08-R	SOP-8	Tape Reel
UM393L-P08-R	UM393G-P08-R	TSSOP-8	Tape Reel
UM393L-SM1-R	UM393G-SM1-R	MSOP-8	Tape Reel

UM393G-D08-T (1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube, R: Tape Reel (2) D08: DIP-8, S08: SOP-8, P08: TSSOP-8, SM1: MSOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--


MARKING

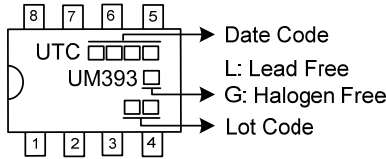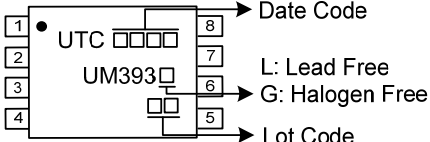DIP-8	SOP-8 / MSOP-8
	
TSSOP-8	-
	-

PIN DESCRIPTION

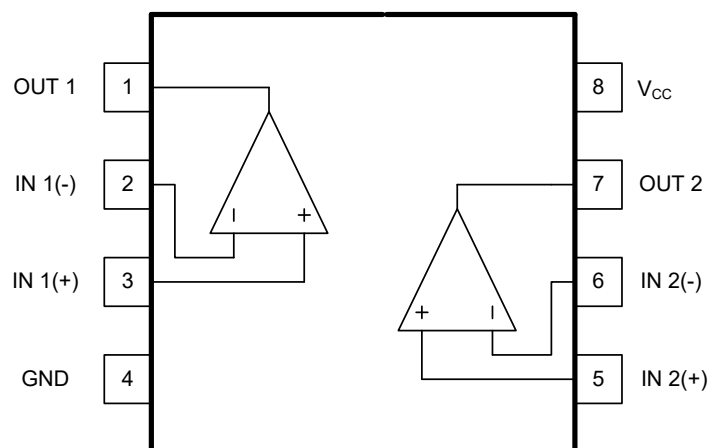

BLOCK DIAGRAM

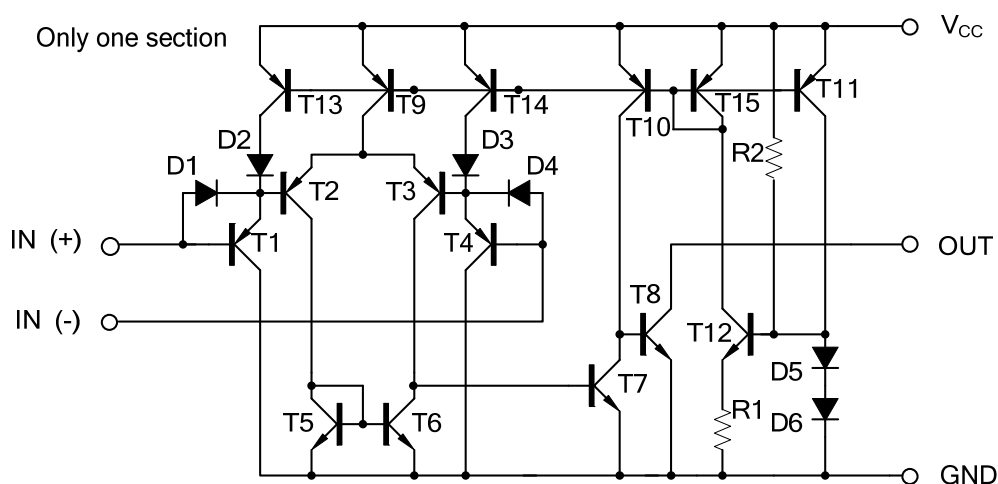

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	36	V
Differential Input Voltage		$V_{I(DIFF)}$	± 36	V
Input Voltage		V_{IN}	-0.3 ~ +36	V
Power Dissipation ($T_A=25^\circ\text{C}$)	DIP-8	P_D	780	mW
	SOP-8		420	mW
	TSSOP-8		350	mW
	MSOP-8		300	mW
	DFN2020-8		830	mW
Electrostatic Discharge	Human-Body Model (HBM) Per JESD22-A114/115	$V_{(ESD)}$	2000	V
Junction Temperature		T_J	+150	$^\circ\text{C}$
Operating Temperature Range (Note 2)		T_{OPR}	-40 ~ +85	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-65 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.




2. It is guarantee by design, not 100% be tested.

■ **ELECTRICAL CHARACTERISTICS**

($V_{CC}=5.0\text{V}$, $T_A=25^\circ\text{C}$, All voltage referenced to GND unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Supply Current	I_{CC}	$R_L=\infty$, $V_{CC}=5\text{V}$		0.6	1.0	mA
		$V_{CC}=36\text{V}$, $T_A=-\text{Full range}$			2.5	mA
Input Offset Voltage	$V_{I(OFF)}$	$V_{CM}=0\text{V}$ to $V_{CC}-1.5\text{V}$ $V_{O(P)}=1.4\text{V}$, $R_S=0\Omega$		0.1	± 5.0	mV
		$T_A=-\text{Full range}$			± 9.0	mV
Input Offset Current	$I_{I(OFF)}$			5	50	nA
		$T_A=-\text{Full range}$			150	nA
Input Bias Current	$I_{I(BIAS)}$			125	250	nA
		$T_A=-\text{Full range}$			400	nA
Input Common Mode Voltage	$V_{I(CM)}$	$V_{CC}=3\sim 36\text{V}$	0		$V_{CC}-1.5$	V
		$T_A=-\text{Full range}$	0		$V_{CC}-2.0$	V
Large Signal Voltage Gain	G_V	$V_{CC}=15\text{V}$, $R_L \geq 15\text{k}\Omega$	50	70		dB
Output Saturation Voltage	V_{SAT}	$V_{I(-)}>1\text{V}$, $V_{I(+)}=0\text{V}$, $I_{SINK}=4\text{mA}$		80	400	mV
		$T_A=-\text{Full Range}$			700	mV
Output Sink Current	$I_{O(SINK)}$	$V_{I(-)}>1\text{V}$, $V_{I(+)}=0\text{V}$, $V_{O(P)}<1.5\text{V}$	6	18		mA
Output Leakage Current	$I_{O(LEAK)}$	$V_{I(+)}=1\text{V}$, $V_{I(-)}=0$		0.1		nA
		$V_{O(P)}=5\text{V}$ $V_{O(P)}=36\text{V}$			1.0	μA
Large Signal Response Time	t_R	$V_{IN}=\text{TTL logic wing}$ $V_{REF}=1.4\text{V}$, $V_{RL}=5\text{V}$, $R_L=5.1\text{k}\Omega$		220		ns
Response Time	t_R	$V_{RL}=5\text{V}$, $R_L=5.1\text{k}\Omega$		800		ns

TYPICAL CHARACTERISTICS

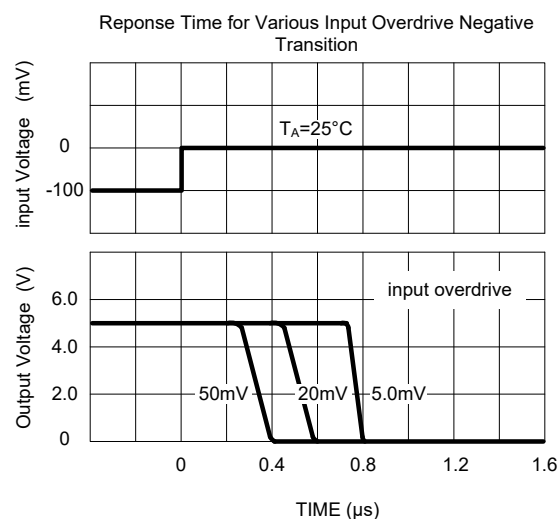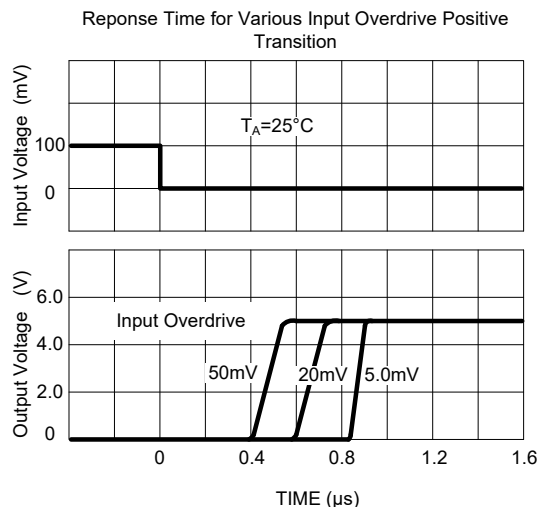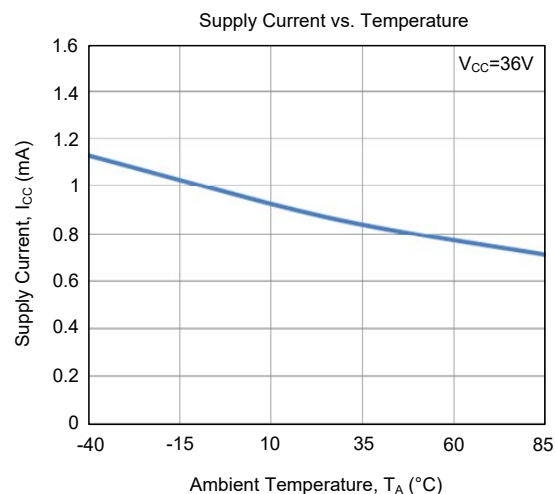

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.