



UPT0223

Preliminary

PHOTOCOUPLER

RANDOM PHASE POWER TRIAC DIP TYPE SSR IDEAL FOR AC LOAD CONTROL


DESCRIPTION

The **UPT0223** Solid State Relays (SSR) are an integration of an infrared emitting diode (IRED), a Phototriac Detector and a main output Triac. These devices are ideally suited for controlling high voltage AC loads with solid state reliability while providing 4kV isolation ($V_{ISO(RMS)}$) from input to output.

FEATURES

- * Compact SSR that's ideal for AC load control
- * Supports 0.3 A ON-state RMS currents.
- * Handles both 100V and 200V AC loads
- * High dielectric strength: 5,000V AC (between input and output)
- * Two types available: Zero-cross type and Random type


SYMBOL



ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UPT0223L-x-C08A-T	UPT0223G-x-C08A-T	SMD-8A	Tube
UPT0223L-x-D08A-T	UPT0223G-x-D08A-T	DIP-8A	Tube


UPT0223G-x-C08A-T	(1)Packing Type (2)Package Type (3)Peak Voltage (4)Green Package	(1) T: Tube (2) C08A: SMD-8A, D08A: DIP-8A (3) 6: 600V, 8: 800V (4) G: Halogen Free and Lead Free, L: Lead Free
-------------------	---	--

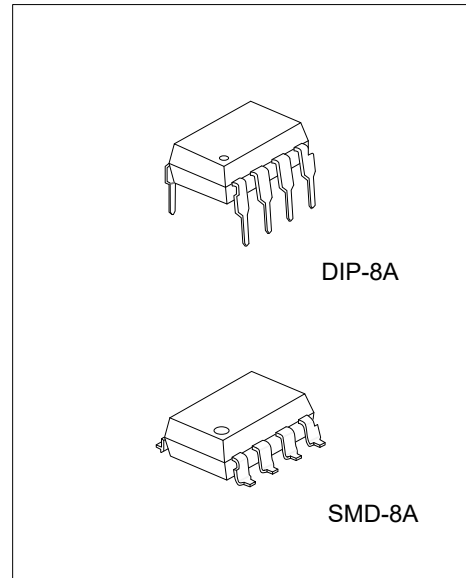

MARKING

SMD-8A	DIP-8A
<p> UTC UPT0223 Date Code L: Lead Free G: Halogen Free Lot Code </p>	<p> UTC UPT0223 Date Code L: Lead Free G: Halogen Free Lot Code </p>

PIN CONFIGURATION

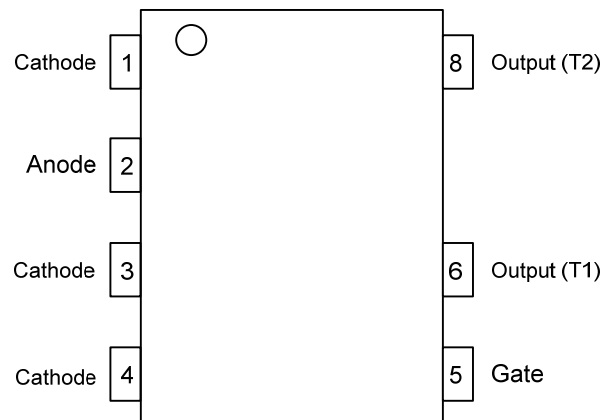

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Input	LED Forward Current	I _F	50	mA
	LED Reverse Voltage	V _R	6	V
	Peak Forward Current (f=100Hz, Duty Ratio=0.1%)	I _{FP}	1	A
Output	Repetitive Peak OFF-State Voltage	V _{DRM}	600	V
	ON-State RMS Current	I _{T(RMS)}	0.3	A
	Non-Repetitive Surge Current (60Hz, 1 Cycle)	I _{TSM}	3	A
I/O Isolation Voltage		V _{ISO}	5000	V/AC
Operating Temperature		T _{OPR}	-30 ~ +85	°C
Storage Temperature		T _{STG}	-40 ~ +125	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. AC for 1 minute, R.H.= 40~60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Input LED Forward Current	I _F	20	mA

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
INPUT						
LED Dropout Voltage	V _F	I _F =20mA		1.21	1.3	V
LED Reverse Voltage	I _R	V _R =6V			10	μA
OUTPUT						
Peak OFF-State Current	I _{DRM}	I _F =0mA, V _{DRM} =600V			100	μA
Peak ON-State Voltage	V _{TM}	I _F =10mA, I _{TM} =Max.			2.5	V
Critical Rate of Rise of OFF-State Voltage	dv/dt	V _{DRM} =600V×1√2	200			V/μs
TRANSFER CHARACTERISTICS						
Trigger LED Current	I _{FT}	V _D =6V, R _L =100Ω			10	mA
Holding Current	I _H				25	mA
Turn on Time	t _{ON}	I _F =20mA V _D =6V, R _L =100Ω			100	μs
I/O Isolation Resistance	R _{ISO}	500V DC	5×10 ¹⁰	10 ¹¹		GΩ

■ TEST CIRCUITS AND WAVEFORMS

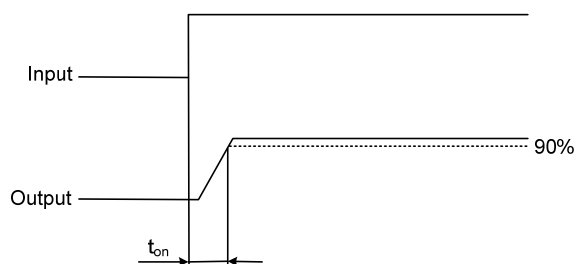


Fig 1. Testing diagram of Turn on time

■ SCHEMATIC AND WIRING DIAGRAMS

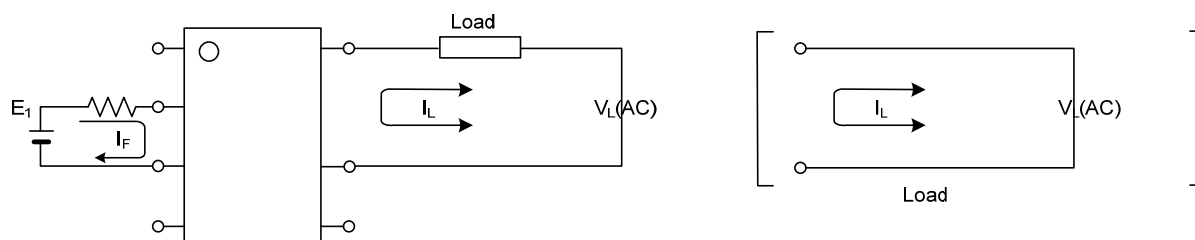


Fig 2. Basic diagrams

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.