



BAP70Q

Preliminary

DIODE

SILICON PIN diodes



DESCRIPTION

The UTC **BAP70Q** is General-purpose PIN diode in an SOD-523 small plastic SMD package.

FEATURES

- * High voltage, current controlled RF resistor for attenuators and switches
- * Low diode capacitance
- * Very low series inductance

SYMBOL

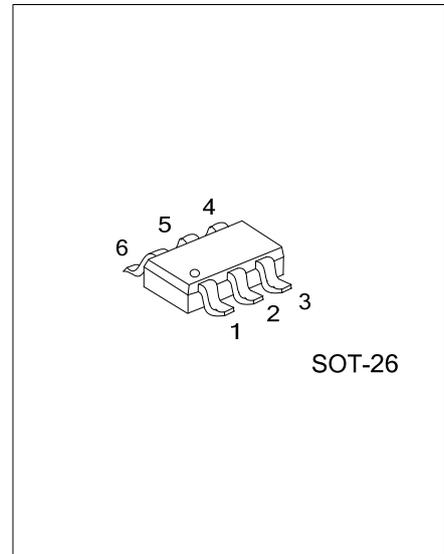


ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
BAP70QL-AG6-R	BAP70QG-AG6-R	SOT-26	Tape Reel

<p>BAP70QG-AG6-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) AG6: SOT-26 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

■ MARKING



■ PIN CONFIGURATION

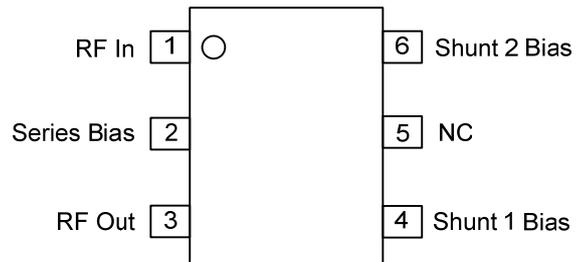

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNITS
Reverse Voltage	V_R	50	V
Forward Current	I_F	100	mA
Power Dissipation ($T_J=90^{\circ}\text{C}$)	P_D	125	mW
Junction Temperature	T_J	-65 ~ +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	θ_{JC}	1000	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Voltage	V_R	$I_R=100\mu\text{A}$	50			V
Reverse Current	I_R	$V_R=50\text{V}$			100	nA
Forward Voltage	V_F	$I_F=50\text{mA}$		0.95	1.1	V
Diode Capacitance	C_d	$V_R=0\text{V}, f=1\text{MHz}$		0.46		pF
		$V_R=1\text{V}, f=1\text{MHz}$		0.35		pF

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.