



UPC2701A

Preliminary

PHOTOCOUPLER

SOP-4 PHOTOTRANSISTOR PHOTOCOUPLER

DESCRIPTION


The UTC **UPC2701A** is a phototransistor photocoupler, it uses UTC's advanced technology to provide the customers with high isolation voltage between input and output, etc.

The UTC **UPC2701A** is suitable for programmable controllers and telecommunication equipments, etc.

FEATURES

- * Current transfer ratio (CTR: MIN. 50% at $I_F=5mA$, $V_{CE}=5V$)
- * Isolation voltage between input and output ($V_{ISO}=3750$ Vrms)
- * High collector-emitter voltage ($V_{CEO}=70V$)
- * Employs double transfer mold technology

SYMBOL

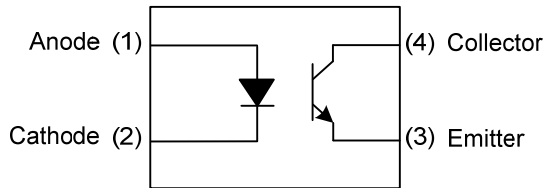


ORDERING INFORMATION


Ordering Number		Package	Pin Assignment				Packing
Lead Free	Halogen Free		1	2	3	4	
UPC2701AL-S04-R	UPC2701AG-S04-R	SOP-4	A	K	E	C	Tape Reel
UPC2701AxL-S04-R	UPC2701AxG-S04-R	SOP-4	A	K	E	C	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode E: Emitter C: Collector

<p>UPC2701AxG-S04-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package (4) Rank 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) S04: SOP-4 (3) G: Halogen Free and Lead Free, L: Lead Free (4) Refer to TRANSFER CHARACTERISTICS
---	--

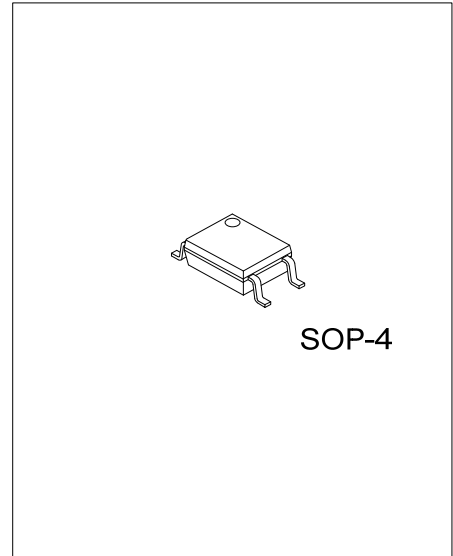

■ MARKING



■ ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$, unless otherwise specified)

	PARAMETER	SYMBOL	RATINGS	UNIT
Input	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	0.5	A
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	80	mW
0.8			mW/ $^\circ\text{C}$	
Output	Collector-Emitter Voltage	V_{CEO}	70	V
	Emitter-Collector Voltage	V_{ECO}	5	V
	Collector Current	I_C	30	mA
	Collector Power Dissipation	P_C	150	mW
Power Dissipation		P_D	170	mW
Isolation Voltage (Note 2)		V_{ISO}	3750	V_{rms}
Junction Temperature		T_J	+125	$^\circ\text{C}$
Operating Temperature		T_{OPR}	-55 ~ +100	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. AC for 1 minute, R.H. = 40~60%.

Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.


■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
INPUT						
Forward Voltage	V_F	$I_F=5\text{mA}$		1.2	1.4	V
Reverse Current	I_R	$V_R=5\text{V}$			5	μA
Terminal Capacitance	C_t	$V=0, f=1\text{MHz}$		10		pF
OUTPUT						
Collector-Emitter Dark Current	I_{CEO}	$V_{CE}=70\text{V}, I_F=0$			100	nA
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=0.1\text{mA}, I_F=0$	70			V
Emitter-Collector Breakdown Voltage	BV_{ECO}	$I_E=10\mu\text{A}, I_F=0$	5			V


■ TRANSFER CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Current Transfer Ratio	CTR	$I_F=5\text{mA}, V_{CE}=5\text{V}$	UPC2701AN	50		300	%
			UPC2701AP	150		300	%
			UPC2701AL	100		300	%
			UPC2701AM	50		150	%
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_F=10\text{mA}, I_C=2\text{mA}$		0.13	0.3	V	
Isolation Resistance	R_{IO}	$V_{IO}=1000\text{Vdc}$	10^{11}			Ω	
Floating Capacitance	C_{IO}	$V=0, f=1\text{MHz}$		0.4		pF	
Rise Time	t_r	$V_{CE}=5\text{V}, I_C=2\text{mA}, R_L=100\Omega$		5		μs	
Fall Time	t_f			7		μs	

■ TEST CIRCUITS AND WAVEFORMS

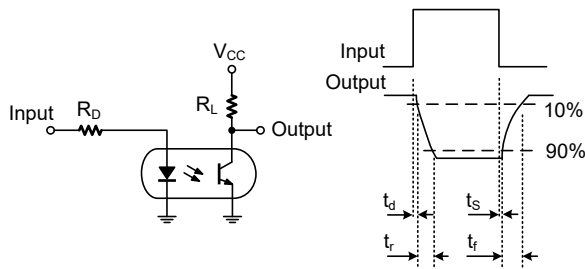

Test Circuit for Response Time

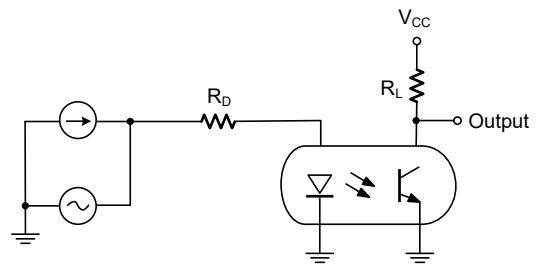

Test Circuit for Frequency Response

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.