



U74LVC34B

CMOS IC


HEX BUFFER

■ DESCRIPTION


The **U74LVC34B** is a hex buffer device providing, it provides the function $Y = A$.

■ FEATURES

- * Operation voltage range: 1.65 ~ 5.5V
- * 24mA Output Drive ($V_{CC}=3.3V$)
- * High Noise Immunity
- * Power Down Protection



SOP-14U




TSSOP-14U

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC34BL-UEA-R	U74LVC34BG-UEA-R	SOP-14U	Tape Reel
U74LVC34BL-UEB-R	U74LVC34BG-UEB-R	TSSOP-14U	Tape Reel

U74LVC34BG-UEA-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) UEA: SOP-14U, UEB: TSSOP-14U (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

■ MARKING

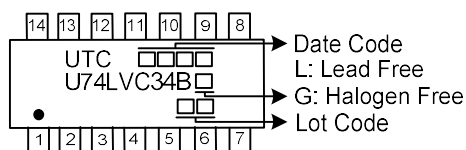



■ PIN CONFIGURATION



■ FUNCTION TABLE (Each Gate)

INPUT(A)	OUTPUT(Y)
L	L
H	H

■ LOGIC DIAGRAM (Each Gate)



IEC Logic Symbol

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified.) (Note1, 2)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 6.5	V
Input Voltage	V_{IN}	-0.5 ~ 6.5	V
Output Voltage (active mode)	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
Output Voltage (power-down mode)	V_{OUT}	-0.5 ~ 6.5	V
Input Clamp Current ($V_{IN}<0$)	I_{IK}	-50	mA
Output Clamp Current ($V_O<0$)	I_{OK}	-50	mA
Output Current	I_{OUT}	±50	mA
V_{CC} or GND Current	I_{CC}	±100	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ RECOMMENDED OPERATING CONDITIONS (Unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	Operating	1.65		5.5	V
		Data retention only	1.5			V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise or Fall Rate	t_R / t_F	$V_{CC}=1.8V\pm0.15V, 2.5V\pm0.2V$			20	ns/V
		$V_{CC}=3.3V\pm0.3V$			10	ns/V
		$V_{CC}=5V\pm0.5V$			5	ns/V
Operating Temperature	T_A		-40		+125	°C

■ STATIC CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	$V_{CC}=1.65V\sim1.95V$	$0.65\times V_{CC}$			V
		$V_{CC}=2.3V\sim2.7V$	1.7			V
		$V_{CC}=2.7V\sim3.6V$	2			V
		$V_{CC}=4.5V\sim5.5V$	$0.7\times V_{CC}$			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=1.65V\sim1.95V$			$0.35\times V_{CC}$	V
		$V_{CC}=2.3V\sim2.7V$			0.7	V
		$V_{CC}=2.7V\sim3.6V$			0.8	V
		$V_{CC}=4.5V\sim5.5V$			$0.3\times V_{CC}$	V
High-Level Output Voltage	V_{OH}	$V_{CC}=1.65V\sim5.5V, I_{OH}=-100\mu A$	$V_{CC}-0.1$			V
		$V_{CC}=1.65V, I_{OH}=-4mA$	1.2			V
		$V_{CC}=2.3V, I_{OH}=-8mA$	1.9			V
		$V_{CC}=3V, I_{OH}=-16mA$	2.4			V
		$V_{CC}=3V, I_{OH}=-24mA$	2.3			V
		$V_{CC}=4.5V, I_{OH}=-32mA$	3.8			V
Low-Level Output Voltage	V_{OL}	$V_{CC}=1.65V\sim5.5V, I_{OL}=100\mu A$			0.1	V
		$V_{CC}=1.65V, I_{OL}=4mA$			0.45	V
		$V_{CC}=2.3V, I_{OL}=8mA$			0.3	V
		$V_{CC}=3V, I_{OL}=16mA$			0.4	V
		$V_{CC}=3V, I_{OL}=24mA$			0.55	V
		$V_{CC}=4.5V, I_{OL}=32mA$			0.55	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=3.6V, V_{IN}=5.5V$ or GND			±1	μA
Power OFF leakage current	I_{OFF}	$V_{CC}=0V, V_{IN}$ or $V_O=5.5V$			±10	μA

■ STATIC CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Supply Current	I_Q	$V_{CC}=1.65V\sim 5.5V$, $V_{IN}=5.5V$ or GND, $I_{OUT}=0$			1	μA
Additional Quiescent Supply Current	ΔI_Q	One input at $V_{CC}-0.6V$, other inputs at V_{CC} or GND, $V_{CC}=3V\sim 5.5V$			500	μA
Input Capacitance	C_{IN}	$V_{CC}=3.3V$, $V_{IN}=V_{CC}$ or GND		3.5		pF

■ DYNAMIC CHARACTERISTICS ($T_A = 25^\circ C$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation delay from Input(nA or nB) to Output(Y)	t_{PLH} / t_{PHL}	$V_{CC}=1.8\pm 0.15V$	$C_L=15pF$, $R_L=1M\Omega$	2		9.9	ns
		$V_{CC}=2.5\pm 0.2V$		1.5		6	ns
		$V_{CC}=3.3\pm 0.3V$		1		4.5	ns
		$V_{CC}=5\pm 0.5V$		1		3.9	ns
		$V_{CC}=1.8\pm 0.15V$	$C_L=30pF$	3.2		12	ns
		$V_{CC}=2.5\pm 0.2V$					
		$V_{CC}=3.3\pm 0.3V$	$C_L=50pF$, $R_L=500\Omega$	1.5		6	ns
		$V_{CC}=5\pm 0.5V$					

■ OPERATING CHARACTERISTICS ($f = 10MHz$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	$V_{CC}=1.8V$		16		pF
		$V_{CC}=2.5V$		16		pF
		$V_{CC}=3.3V$		16		pF
		$V_{CC}=5V$		18		pF

From Output

C_L

(Note)

R_L

S

V_{LOAD}


Open

GND

TEST	S
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

Note : C_L includes probe and jig capacitance.

V _{CC}	V _{IN}	t _R , t _F	V _M	V _{LOAD}	C _L	R _L	V _Δ
1.8V±0.15V	V _{CC}	≤2ns	V _{CC} /2	2*V _{CC}	15pF	1MΩ	0.15V
					30pF	1KΩ	
2.5V±0.2V	V _{CC}	≤2ns	V _{CC} /2	2*V _{CC}	15pF	1MΩ	0.15V
					30pF	500Ω	
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	15pF	1MΩ	0.3V
					50pF	500Ω	
5V±0.5V	V _{CC}	≤2.5ns	V _{CC} /2	2*V _{CC}	15pF	1MΩ	0.3V
					50pF	500Ω	

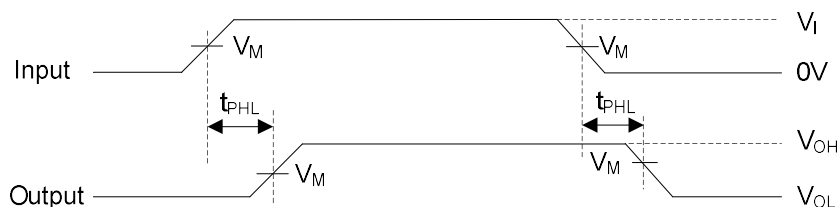

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.