



LD1117B

LINEAR INTEGRATED CIRCUIT

LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATORS

■ DESCRIPTION

The UTC **LD1117B** is a low dropout, 3-terminal positive voltage regulator designed to provide output current up to 1A. There are adjustable version ($V_{REF}=1.25V$) and various fixed versions.

■ FEATURES

- * Low dropout voltage
- * Output current up to 1A
- * Built-in current limit and over temperature protection
- * Low current consumption
- * Support MLCC
- * Green Product


■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment			Packing
		1	2	3	
LD1117BG-xx-AA3-A-R	SOT-223	G	O	I	Tape Reel


Notes: 1. Pin Assignment: G: GND/ADJ O: V_{OUT} I: V_{IN}

2. xx: Output Voltage, Refer to Marking Information.


LD1117BG-xx-AA3-x-R	
(1)Packing Type	(1) R: Tape Reel
(2)Pin Assignment	(2) refer to Pin Assignment
(3)Package Type	(3) AA3: SOT-223
(4)Output Voltage Code	(4) xx: refer to Marking Information
(5)Green Package	(5) G: Halogen Free and Lead Free

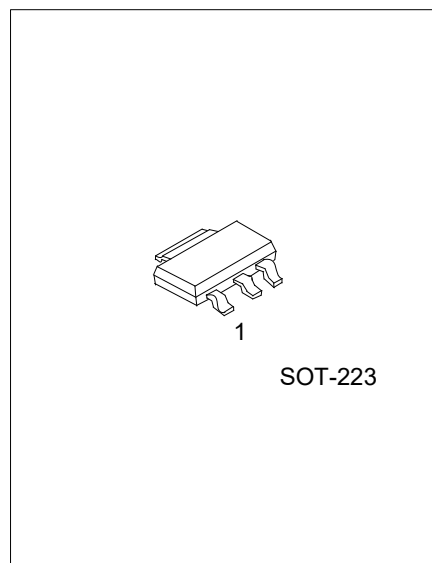

MARKING INFORMATION

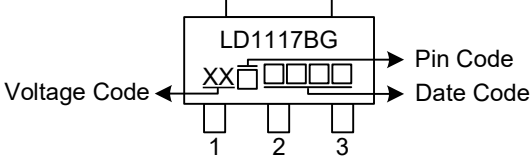PACKAGE	VOLTAGE CODE	MARKING
SOT-223	18 : 1.8V 33 : 3.3V AD : ADJ	

BLOCK DIAGRAM

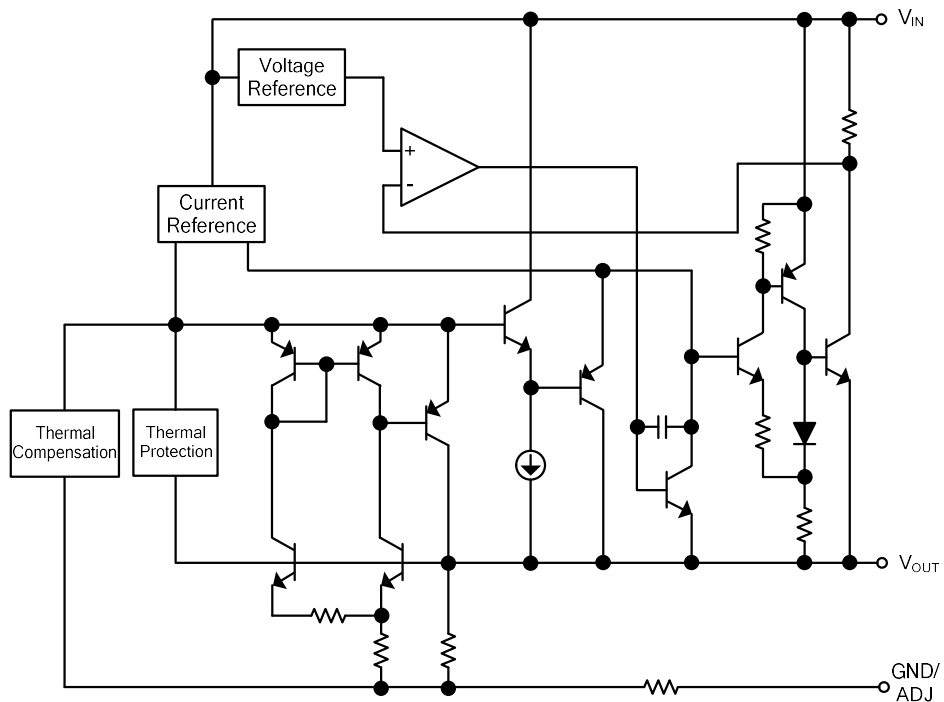

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Input Voltage	V _{IN}	18	V
Power Dissipation	P _D	Internally limited	
Junction Temperature	T _J	+150	°C
Operating Temperature (Note 2)	T _{OPR}	-40 ~ +125	°C
Storage temperature	T _{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. This condition is only determined from design. It can't be 100% tested in mass production.

■ RECOMMENDED OPERATING RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	15	V

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ _{JA}	165	°C/W
Junction to Case	θ _{JC}	15	°C/W

■ ELECTRICAL CHARACTERISTICS

(T_A=25°C, refer to the test circuits, C_O=10μF unless otherwise specified)

For LD1117B-1.8

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	V _{IN} =3.8V, I _{OUT} =10mA, T _J =25°C	1.764	1.800	1.836	V
Output Voltage	V _{OUT}	V _{IN} =3.3 to 8V, I _{OUT} =0~1000mA	1.764	1.800	1.836	V
Line Regulation	ΔV _{OUT}	V _{IN} =3.3 to 8V, I _{OUT} =0mA		1	6	mV
Load Regulation	ΔV _{OUT}	V _{IN} =3.3V, I _{OUT} =0~1000mA		1	10	mV
Temperature stability	ΔV _{OUT}			0.5		%
Long Term Stability	ΔV _{OUT}	1000 hrs, T _J =125°C		0.3		%
Operating Input Voltage	V _{IN}	I _{OUT} =100mA			15	V
Quiescent Current	I _Q	V _{IN} ≤10V		5	10	mA
Current Limit	I _{LIMIT}	V _{IN} =6.8V, T _J =25°C	1000			mA
Output Noise Voltage	e _N	B=10Hz to 10KHz, T _J =25°C		100		μV
Supply Voltage Rejection	SVR	I _{OUT} =40mA, f=120Hz, T _J =25°C, V _{IN} =5.5V, V _{RIPPLE} =1V _{PP}	60	70		dB
Dropout Voltage	V _D	I _{OUT} =100mA		1.00	1.10	V
		I _{OUT} =500mA		1.15	1.25	V
		I _{OUT} =800mA		1.20	1.30	V
		I _{OUT} =1A		1.20	1.30	V
Thermal Regulation		T _A =25°C, 30ms Pulse		0.01	0.10	%/W

ELECTRICAL CHARACTERISTICS (Cont.)

For LD1117B-3.3

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	$V_{IN}=5.3V$, $I_{OUT}=10mA$, $T_J=25^{\circ}C$	3.234	3.300	3.366	V
Output Voltage	V_{OUT}	$V_{IN}=4.75$ to $10V$, $I_{OUT}=0\sim1000mA$	3.234	3.300	3.366	V
Line Regulation	ΔV_{OUT}	$V_{IN}=4.75$ to $15V$, $I_{OUT}=0mA$		1	6	mV
Load Regulation	ΔV_{OUT}	$V_{IN}=4.75V$, $I_{OUT}=0\sim1000mA$		1	10	mV
Temperature stability	ΔV_{OUT}			0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, $T_J=125^{\circ}C$		0.3		%
Operating Input Voltage	V_{IN}	$I_{OUT}=100mA$			15	V
Quiescent Current	I_Q	$V_{IN}\leq15V$		5	10	mA
Current Limit	I_{LIMIT}	$V_{IN}=8.3V$, $T_J=25^{\circ}C$	1000			mA
Output Noise Voltage	e_N	$B=10Hz$ to $10KHz$, $T_J=25^{\circ}C$		100		μV
Supply Voltage Rejection	SVR	$I_{OUT}=40mA$, $f=120Hz$, $T_J=25^{\circ}C$, $V_{IN}=6.3V$, $V_{RIPPLE}=1V_{PP}$	60	70		dB
Dropout Voltage	V_D	$I_{OUT}=100mA$		1.00	1.10	V
		$I_{OUT}=500mA$		1.15	1.25	V
		$I_{OUT}=800mA$		1.20	1.30	V
		$I_{OUT}=1A$		1.20	1.30	V
Thermal Regulation		$T_A=25^{\circ}C$, 30ms Pulse		0.01	0.10	%/W

For LD1117B-ADJ

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	$V_{IN}-V_{OUT}=2V$, $I_{OUT}=10mA$, $T_J=25^{\circ}C$	1.225	1.25	1.275	V
Reference Voltage	V_{REF}	$V_{IN}-V_{OUT}=1.4$ to $10V$, $I_{OUT}=10\sim1000mA$	1.225	1.25	1.275	V
Line Regulation	ΔV_{OUT}	$V_{IN}-V_{OUT}=1.5$ to $13.75V$, $I_{OUT}=10mA$		0.035	0.2	%
Load Regulation	ΔV_{OUT}	$V_{IN}-V_{OUT}=3V$, $I_{OUT}=10\sim1000mA$		0.1	0.4	%
Temperature stability	ΔV_{OUT}			0.50		%
Long Term Stability	ΔV_{OUT}	1000 hrs, $T_J=125^{\circ}C$		0.3		%
Operating Input Voltage	V_{IN}				15	V
Adjustment Pin Current	I_{ADJ}	$V_{IN}\leq15V$		60	120	μA
Adjustment Pin Current Change	ΔI_{ADJ}	$V_{IN}-V_{OUT}=1.4$ to $10V$, $I_{OUT}=10\sim1000mA$		1	5	μA
Minimum Load Current	$I_{O(MIN)}$	$V_{IN}=15V$		2	5	mA
Current Limit	I_{LIMIT}	$V_{IN}-V_{OUT}=5V$, $T_J=25^{\circ}C$	1000			mA
Output Noise (% V_O)	e_N	$B=10Hz$ to $10KHz$, $T_J=25^{\circ}C$		0.003		%
Supply Voltage Rejection	SVR	$I_{OUT}=40mA$, $f=120Hz$, $T_J=25^{\circ}C$, $V_{IN}-V_{OUT}=3V$, $V_{RIPPLE}=1V_{PP}$	60	75		dB
Dropout Voltage	V_D	$I_{OUT}=100mA$		1.00	1.10	V
		$I_{OUT}=500mA$		1.15	1.25	V
		$I_{OUT}=800mA$		1.20	1.30	V
		$I_{OUT}=1A$		1.20	1.30	V
Thermal Regulation		$T_A=25^{\circ}C$, 30ms Pulse		0.01	0.10	%/W

■ TYPICAL APPLICATIONS

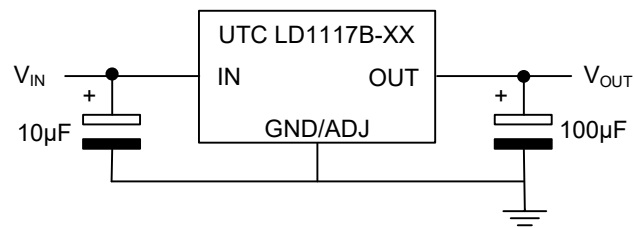


Fig.1 Tyncal Application Circuit

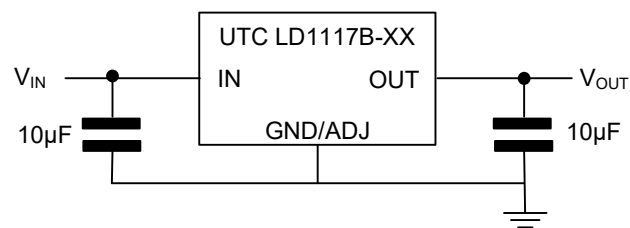


Fig.2 Tyncal Application Circuit (FOR MLCC)

■ APPLICATION NOTE of LD1117B ADJUSTABLE

The **LD1117B** adjustable has a reference voltage of between the OUT and ADJ/GND pins. I_{ADJ} is 60 μ A typ. (120 μ A max.) and ΔI_{ADJ} is 1 μ A typ. (5 μ A max.).

R_1 is normally fixed to 120 Ω .

From figure 6 we obtain:

$$V_{OUT} = V_{REF} + R_2(I_{ADJ} + I_{R1}) = V_{REF} + R_2(I_{ADJ} + V_{REF}/R_1) = V_{REF}(1 + R_2/R_1) + R_2 \times I_{ADJ}.$$

Usually R_2 value is in the range of few K Ω , so the $R_2 \times I_{ADJ}$ product could be neglected; then the above expression becomes: $V_{OUT} = V_{REF}(1 + R_2/R_1)$

For better load regulation, realize a good Kelvin connection of R_1 and R_2 is important. Particularly R_1 connection must be realized very close to OUT and ADJ/GND pin, while R_2 ground connection must be placed as near as possible to the negative Load pin. Ripple rejection can be improved by introducing a 10 μ F electrolytic capacitor placed in parallel to the R_2 resistor (See Fig. 8)

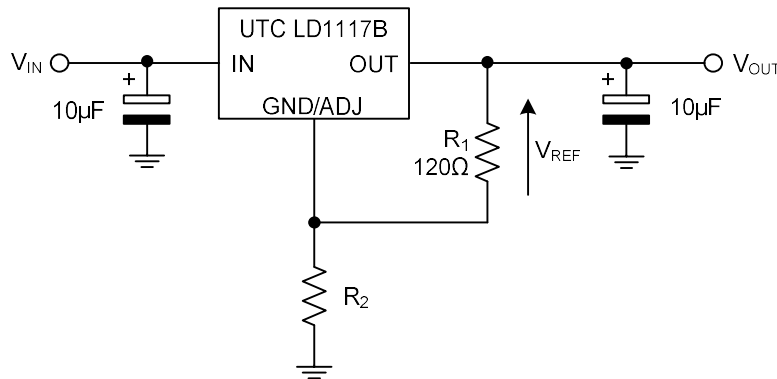


Fig.5 Adjustable Output Voltage Application Circuit

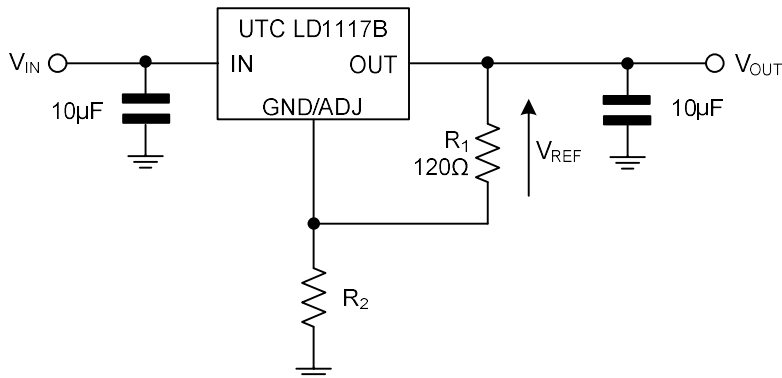


Fig.6 Adjustable Output Voltage Application Circuit (FOR MLCC)






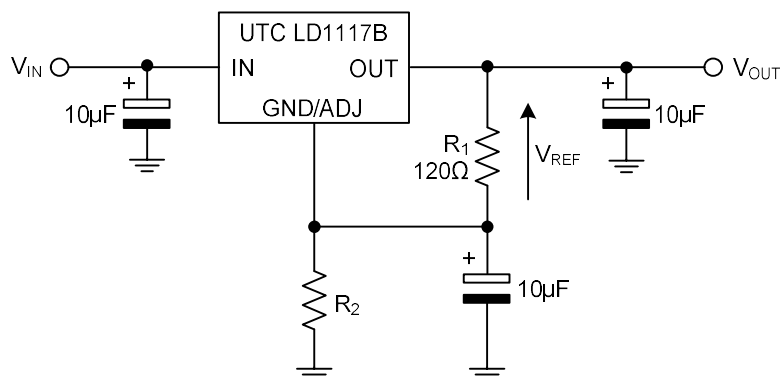


Fig.7 Adjustable Output Voltage Application with improved Ripple Rejection.

■ TYPICAL CHARACTERISTICS

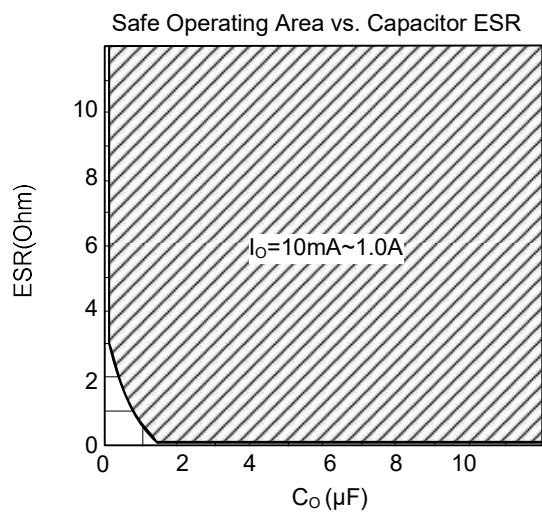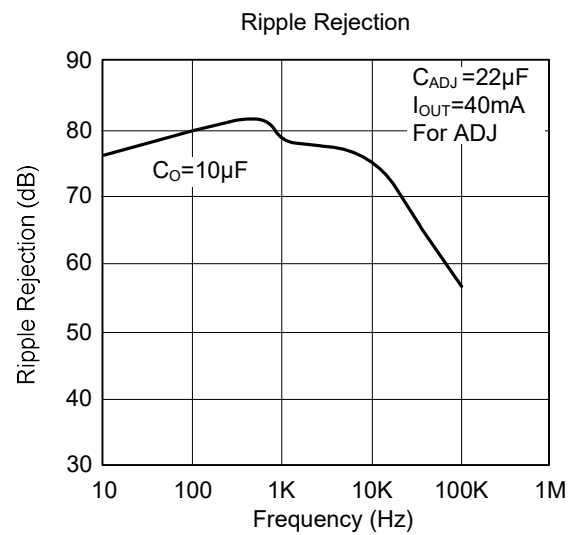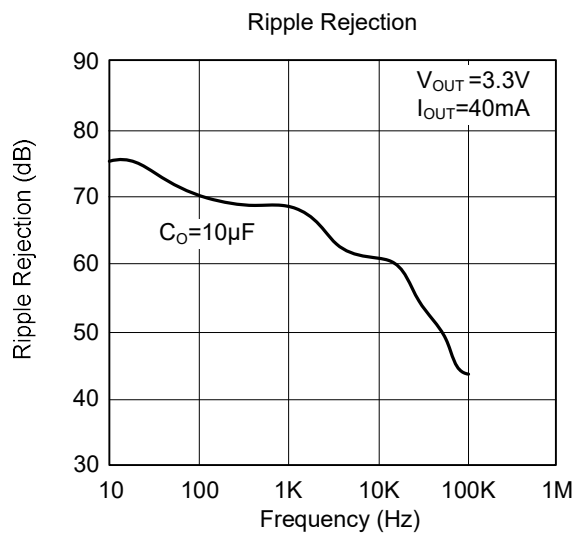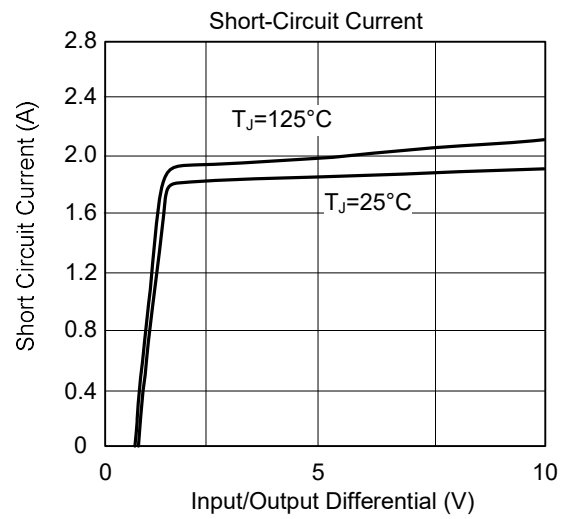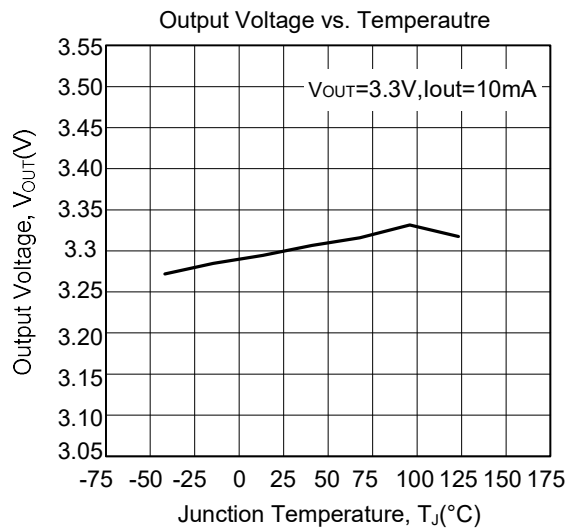

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.