



U74AHCT34


CMOS IC

HEX BUFFER

DESCRIPTION

The **U74AHCT34** devices contain six independent buffer and they perform function $Y=A$.

The **U74AHCT34** is characterized for operation from -40°C to 125°C .

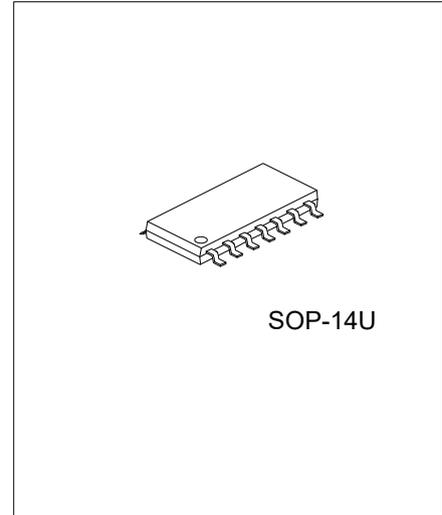

FEATURES


- * Enhanced-Performance Implanted CMOS Process
- * Inputs are TTL-Voltage compatible
- * Package Options Include Plastic

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AHCT34L-UEA-R	U74AHCT34G-UEA-R	SOP-14U	Tape Reel

<p>U74AHCT34G-UEA-R</p>	<p>(1) R: Tape Reel (2) UEA: SOP-14U (3) G: Halogen Free and Lead Free, L: Lead Free</p>
-------------------------	--

MARKING

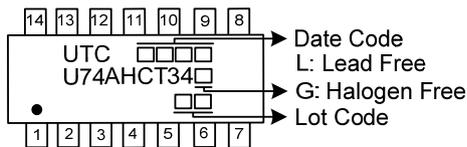


■ PIN CONFIGURATION

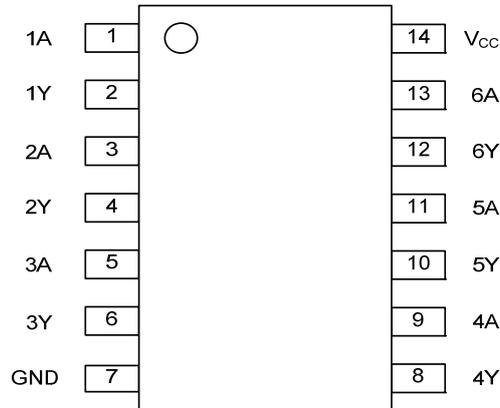

■ FUNCTION TABLE (each gate)

INPUT	OUTPUT
A	Y
L	L
H	H

■ LOGIC DIAGRAM (positive logic)



IEC logic symbol

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified) (Note 2)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 7	V
Input Voltage	V_{IN}	-0.5 ~ 7	V
Output Voltage(active mode)	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
Input Clamp Current($V_I < 0$)	I_{IK}	-20	mA
Output Clamp Current($V_O < 0$)	I_{OK}	± 20	mA
Output Current	I_{OUT}	± 25	mA
V_{CC} or GND Current	I_{CC}	± 50	mA
Storage Temperature	T_{STG}	-65 ~ +150	$^{\circ}C$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ RECOMMENDED OPERATING COMDITIONS (Unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	Operating	4.5		5.5	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
High-level Output Current	I_{OH}	$V_{CC}=4.5V$			-8	mA
Low-level Output Current	I_{OL}	$V_{CC}=4.5V$			8	mA
Operating Temperature	T_A		-40		+125	$^{\circ}C$

■ STATIC CHARACTERISTICS (Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Positive-Going Input Threshold Voltage	V_{IH}	$V_{CC}=4.5V$	2			V
		$V_{CC}=5.5V$	2			
Negative-Going Input Threshold Voltage	V_{IL}	$V_{CC}=4.5V$			0.8	V
		$V_{CC}=5.5V$			0.8	
High-Level Output Voltage	V_{OH}	$V_{CC}=4.5V, I_{OH}=-50\mu A$	4.4			V
		$V_{CC}=4.5V, I_{OH}=-8mA$	3.94			
Low-Level Output Voltage	V_{OL}	$V_{CC}=4.5V, I_{OL}=50\mu A$			0.1	V
		$V_{CC}=4.5V, I_{OL}=8mA$			0.36	
Input Leakage Current	I_I	$V_{CC}=0V \sim 5.5V, V_I=V_{CC}$ or GND			± 0.1	μA
Quiescent Supply Current	I_{CC}	$V_{CC}=5.5V, V_I=5.5V$ or GND, $I_O=0$			2	μA
Additional Quiescent Supply Current	ΔI_{CC}	$V_{CC}=5.5V$, One input at 3.4V, other inputs at V_{CC} or GND			1.35	mA
Input Capacitance	C_I	$V_{CC}=3.3V, V_I=V_{CC}$ or GND		4	10	pF

■ DYNAMIC CHARACTERISTICS (Input: $t_R, t_F \leq 3ns$; PRR $\leq 1MHz$, unless otherwise specified)

See Fig. 1 and Fig. 2 for test circuit and waveforms.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output(Y)	t_{PLH}/t_{PHL}	$V_{CC}=5V \pm 0.5V, C_L=15pF$		4.7	6.7	ns
		$V_{CC}=5V \pm 0.5V, C_L=50pF$		5.5	7.7	

■ OPERATING CHARACTERISTICS (Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	No load, $f=1MHz, V_{CC}=5V$		14		pF

■ TEST CIRCUIT AND WAVEFORMS

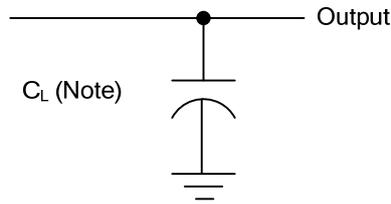


Fig. 1 Load circuitry for switching times.

Note: C_L includes probe and jig capacitance.

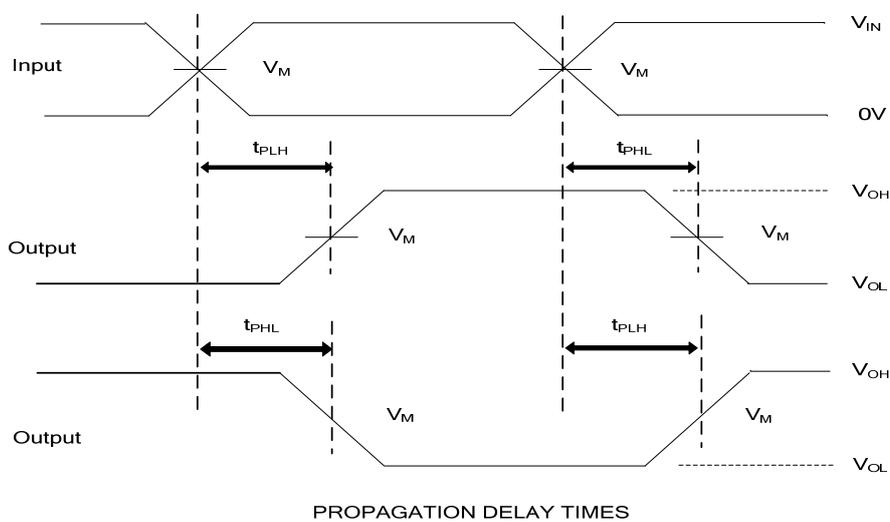


Fig. 2 Propagation delay from input(A) to output(Y) and Output transition time.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.