



N-CHANNEL SGT ENHANCEMENT POWER MOSFET



DESCRIPTION

The UTC **USG15R130HC** is a N-channel Power MOSFET, it uses UTC's advanced technology to provide the customers with low $R_{DS(ON)}$ characteristic by high cell density trench technology.

FEATURES

- * $R_{DS(ON)} \leq 13 \text{ m}\Omega @ V_{GS} = 10\text{V}, I_D = 45\text{A}$
- * Extremely low on-resistance $R_{DS(ON)}$
- * Excellent Low Ciss
- * Green Product

SYMBOL

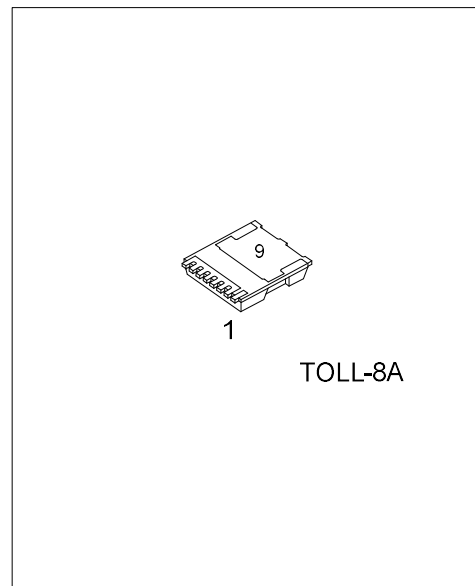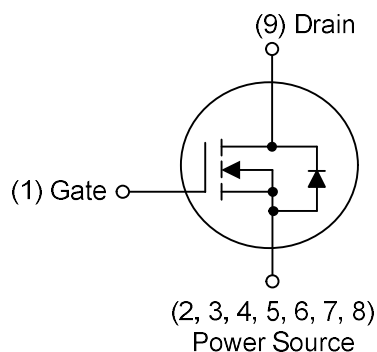


ORDERING INFORMATION

Ordering Number	Package	Pin Assignment									Packing
		1	2	3	4	5	6	7	8	9	
USG15R130HCG-T8A-R	TOLL-8A	G	S	S	S	S	S	S	S	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

USG15R130HCG-T8A-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) T8A: TOLL-8A
	(3)Green Package	(3) G: Halogen Free and Lead Free

■ MARKING

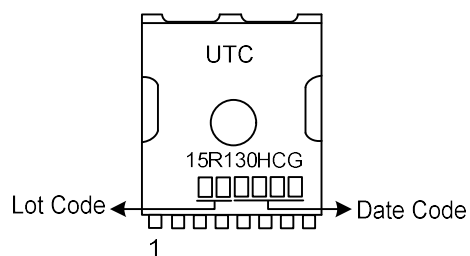

■ **ABSOLUTE MAXIMUM RATING** ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DS}	150	V
Gate-Source Voltage		V_{GS}	± 20	V
Drain Current	DC	I_D	60	A
	Pulsed (Note 2)	I_{DM}	120	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	29	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	7.4	V/ns
Power Dissipation		P_D	250	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L = 0.1\text{mH}$, $I_{AS} = 24.1\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\ \Omega$, Starting $T_J = 25^\circ\text{C}$.

4. $I_{SD} \leq 30\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq 25^\circ\text{C}$.

■ **THERMAL DATA**

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	35	$^\circ\text{C}/\text{W}$
Junction to Case	θ_{JC}	0.5	$^\circ\text{C}/\text{W}$

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.


■ **ELECTRICAL CHARACTERISTICS** ($T_J = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250μA	150			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =150V, V _{GS} =0V			1	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} = V _{GS} , I _D =250μA	2.0		4.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =45A			13	mΩ
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		5640		pF
Output Capacitance		C _{OSS}			1000		pF
Reverse Transfer Capacitance		C _{RSS}			101		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{DS} =120V, V _{GS} =10V, I _D =45A (Note 1, 2)		194		nC
Gate to Source Charge		Q _{GS}			38		nC
Gate to Drain Charge		Q _{GD}			41		nC
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =75V, V _{GS} =10V, I _D =45A, R _G =3Ω (Note 1, 2)		85		ns
Rise Time		t _R			52		ns
Turn-OFF Delay Time		t _{D(OFF)}			229		ns
Fall-Time		t _F			48		ns
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Continuous Drain-Source Diode Forward Current		I _S				60	A
Maximum Pulsed Drain-Source Diode Forward Current		I _{SM}				120	A
Diode Forward Voltage		V _{SD}	I _F =60A, V _{GS} =0V			1.4	V
Reverse Recovery Time (Note 1)		t _{rr}	I _S =30A, V _{GS} =0V,		71		nS
Reverse Recovery Charge		Q _{rr}	dl _F /dt =100A/μs		178		nC


Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

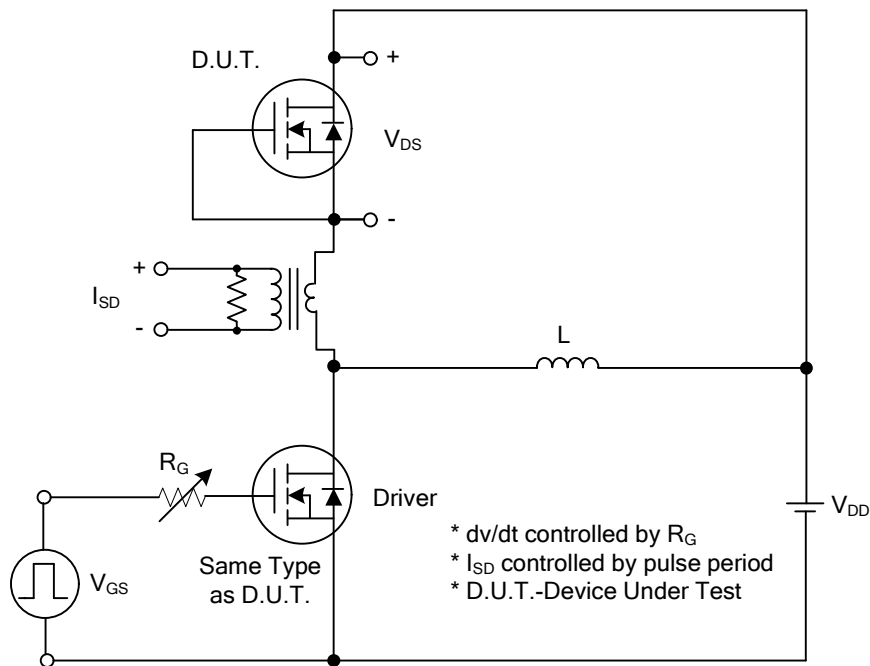


Peak Diode Recovery dv/dt Test Circuit

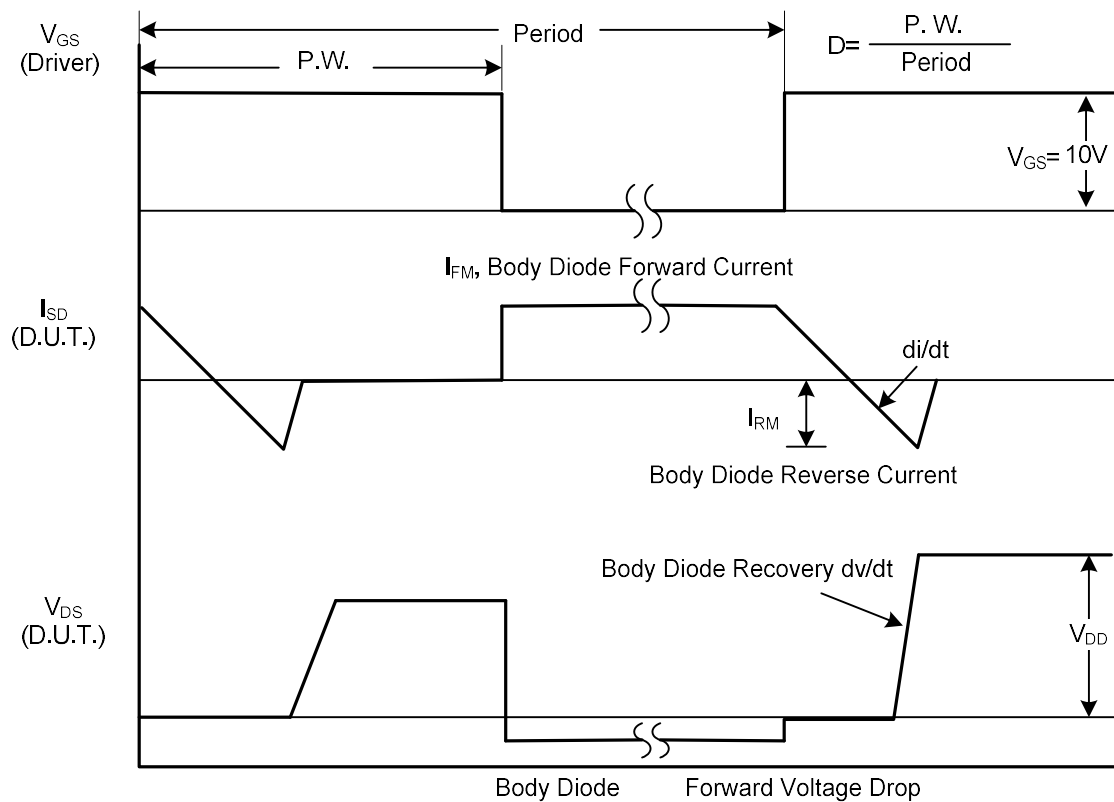


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS

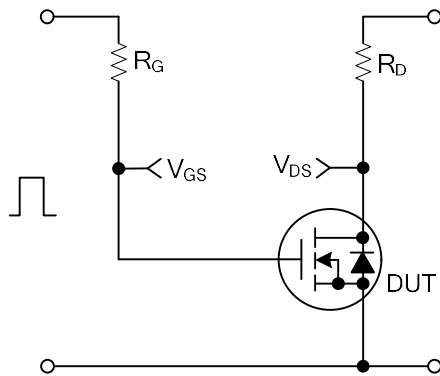


Switching Test Circuit

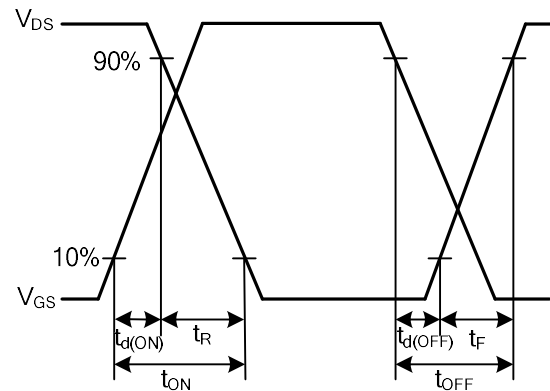


Switching Waveforms

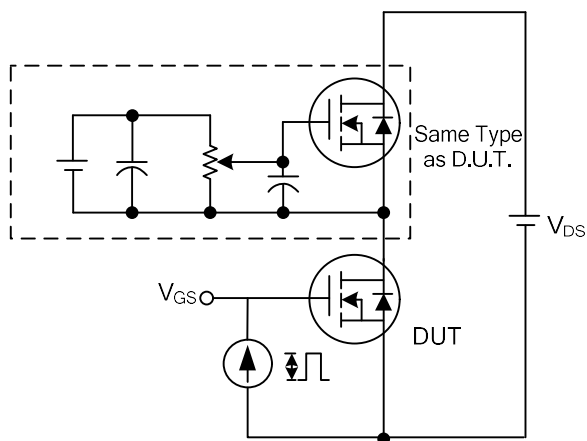


Gate Charge Test Circuit

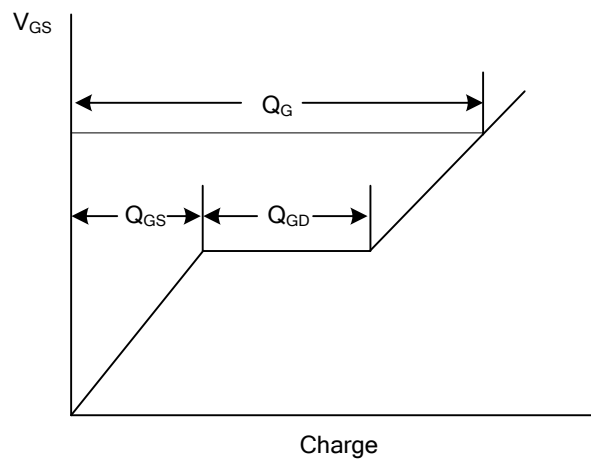

Gate Charge Waveform

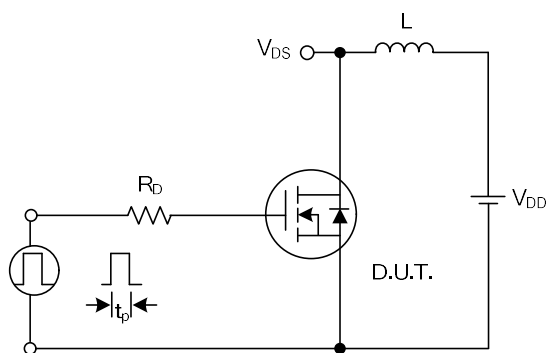

Unclamped Inductive Switching Test Circuit

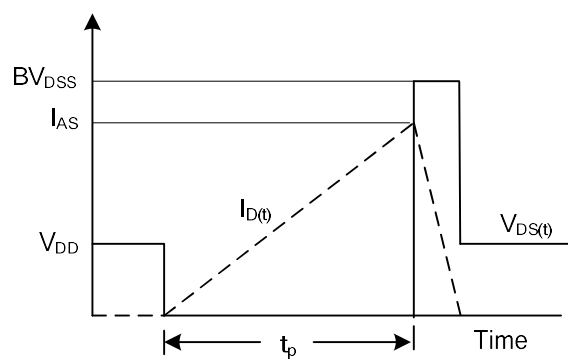

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.